

# Eastern Chemical Service, Inc.

PROFESSIONAL PEST CONTROL OPERATORS

MEMBER—  
NATIONAL PEST CONTROL ASSOCIATION  
NEW ENGLAND PEST CONTROL ASSOCIATION  
CONNECTICUT PEST CONTROL ASSOCIATION  
ENTOMOLOGICAL SOCIETY OF AMERICA

368 Broad Street  
New London, Connecticut 06320

## WOOD PRESERVATIVE

### Active Ingredients:

Pentachlorophenol *	4.35 %
Other Chlorophenols and related compounds *	.65 %
Petroleum Solvents	95.00 %

\* 5.0 % Technical Pentachlorophenol as defined in  
Federal Specification TT - W - 570.

Eastern Chemical Service Wood Preservative is a clean solution  
for protecting wood against fungus growths which cause rot and  
stain, Powder Post Beetles and Carpenter Ants.


MANUFACTURED BY: EASTERN CHEMICAL SERVICE INC.  
368 Broad Street  
New London, Connecticut 06320

## WARNING


KEEP OUT OF REACH OF CHILDREN

SEE OTHER WARNINGS ON THE BACK/SIDE PANEL

NET CONTENTS: \_\_\_\_\_ GALLONS

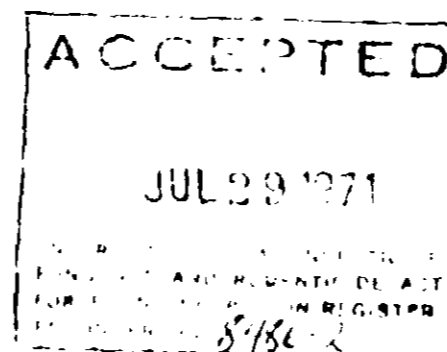

TELEPHONE • NEW LONDON 442-6833



## WARNING

Harmful if swallowed or absorbed through skin. Causes skin irritation. Do not breathe vapor or spray mist. Do not get in eyes, on skin or on clothing. Wash thoroughly after use. Do not use or store near heat or open flame. Keep out of the reach of children. Wear rubber gloves and protective clothing when handling the freshly treated lumber.

## DIRECTIONS

Wood Preservation: Before treatment, all wood should be normally dry. All unsound wood should be removed two feet beyond any visible evidence of decay. For best results, Eastern Chemical Service Wood Preservative should be applied so as to effect maximum penetration into the wood and maximum absorption at joints and ends. Complete immersion, where possible, in an open tank is the best procedure for accomplishing this. At least five minutes immersion per inch thickness is recommended for all cases. Where wood will be in direct contact with the ground, such as in the case of fence posts, the immersion period should be from 12 - 48 hours, and the posts should be peeled of bark, dry and well seasoned. Where the immersion treatment is impractical, heavy brush application may be used. Where the wood will be in direct contact with the ground, several brush applications should be given. Permit Eastern Chemical Service Wood Preservative to dry at least 72 hours before applying paint. Estimated coverages: 5 to 10 gallons per 1000 board feet for open tank treatment; 200 square feet per gallon for brush application.

### GENERAL FISH, WILDLIFE AND ENVIRONMENTAL WARNINGS

This product is toxic to fish and wildlife. Keep out of lakes, streams and ponds. Rinse equipment and containers and dispose of wastes by burying in non-crop lands away from water supplies. Containers should be disposed of by punching holes in them and burying with wastes, or by burning. KEEP OUT OF SMOKE.

EPA REGISTRATION NO. 8486 - 2.

