


HARRIS

CONTENTS  
ONE GALLON

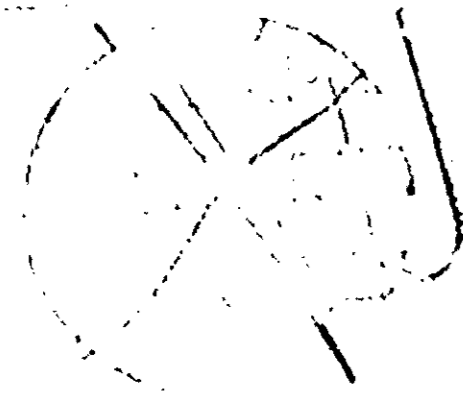

# YACHT & BOAT

**ACCEPTED**  
SEP 28 1970  
UNDER THE FEDERAL INSECTICIDE  
FUNGICIDE AND ROSENICIDE ACT  
FOR ECONOMIC POISON REGISTER-  
ED UNDER NO. 853-7 SUBJECT  
TO ATTACHED COMMENTS.

## FINN 1003

**CAUTION!**  
KEEP OUT OF  
THE REACH OF  
CHILDREN

### ANTI-FOULING PAINT GREEN COPPER BOTTOM

Active Ingredient \_\_\_\_\_ 100%  
(Metallic Copper)  
Inert Ingredients \_\_\_\_\_ 0%

USDA REG. NO. \_\_\_\_\_

SEE INSTRUCTIONS STATE-  
MENT ON BACK PANEL

RED



RIS

CONTENTS  
ONE GALLON

BOAT

IG PAINT


OTTOM

Active Ingredient ..... 100%  
(Metallic Copper) .....  
Inert Ingredients ..... 0%

USDA REG. NO. 10077

SEE ANTIPOISE STATE-  
MENT ON BACK PANEL

RED

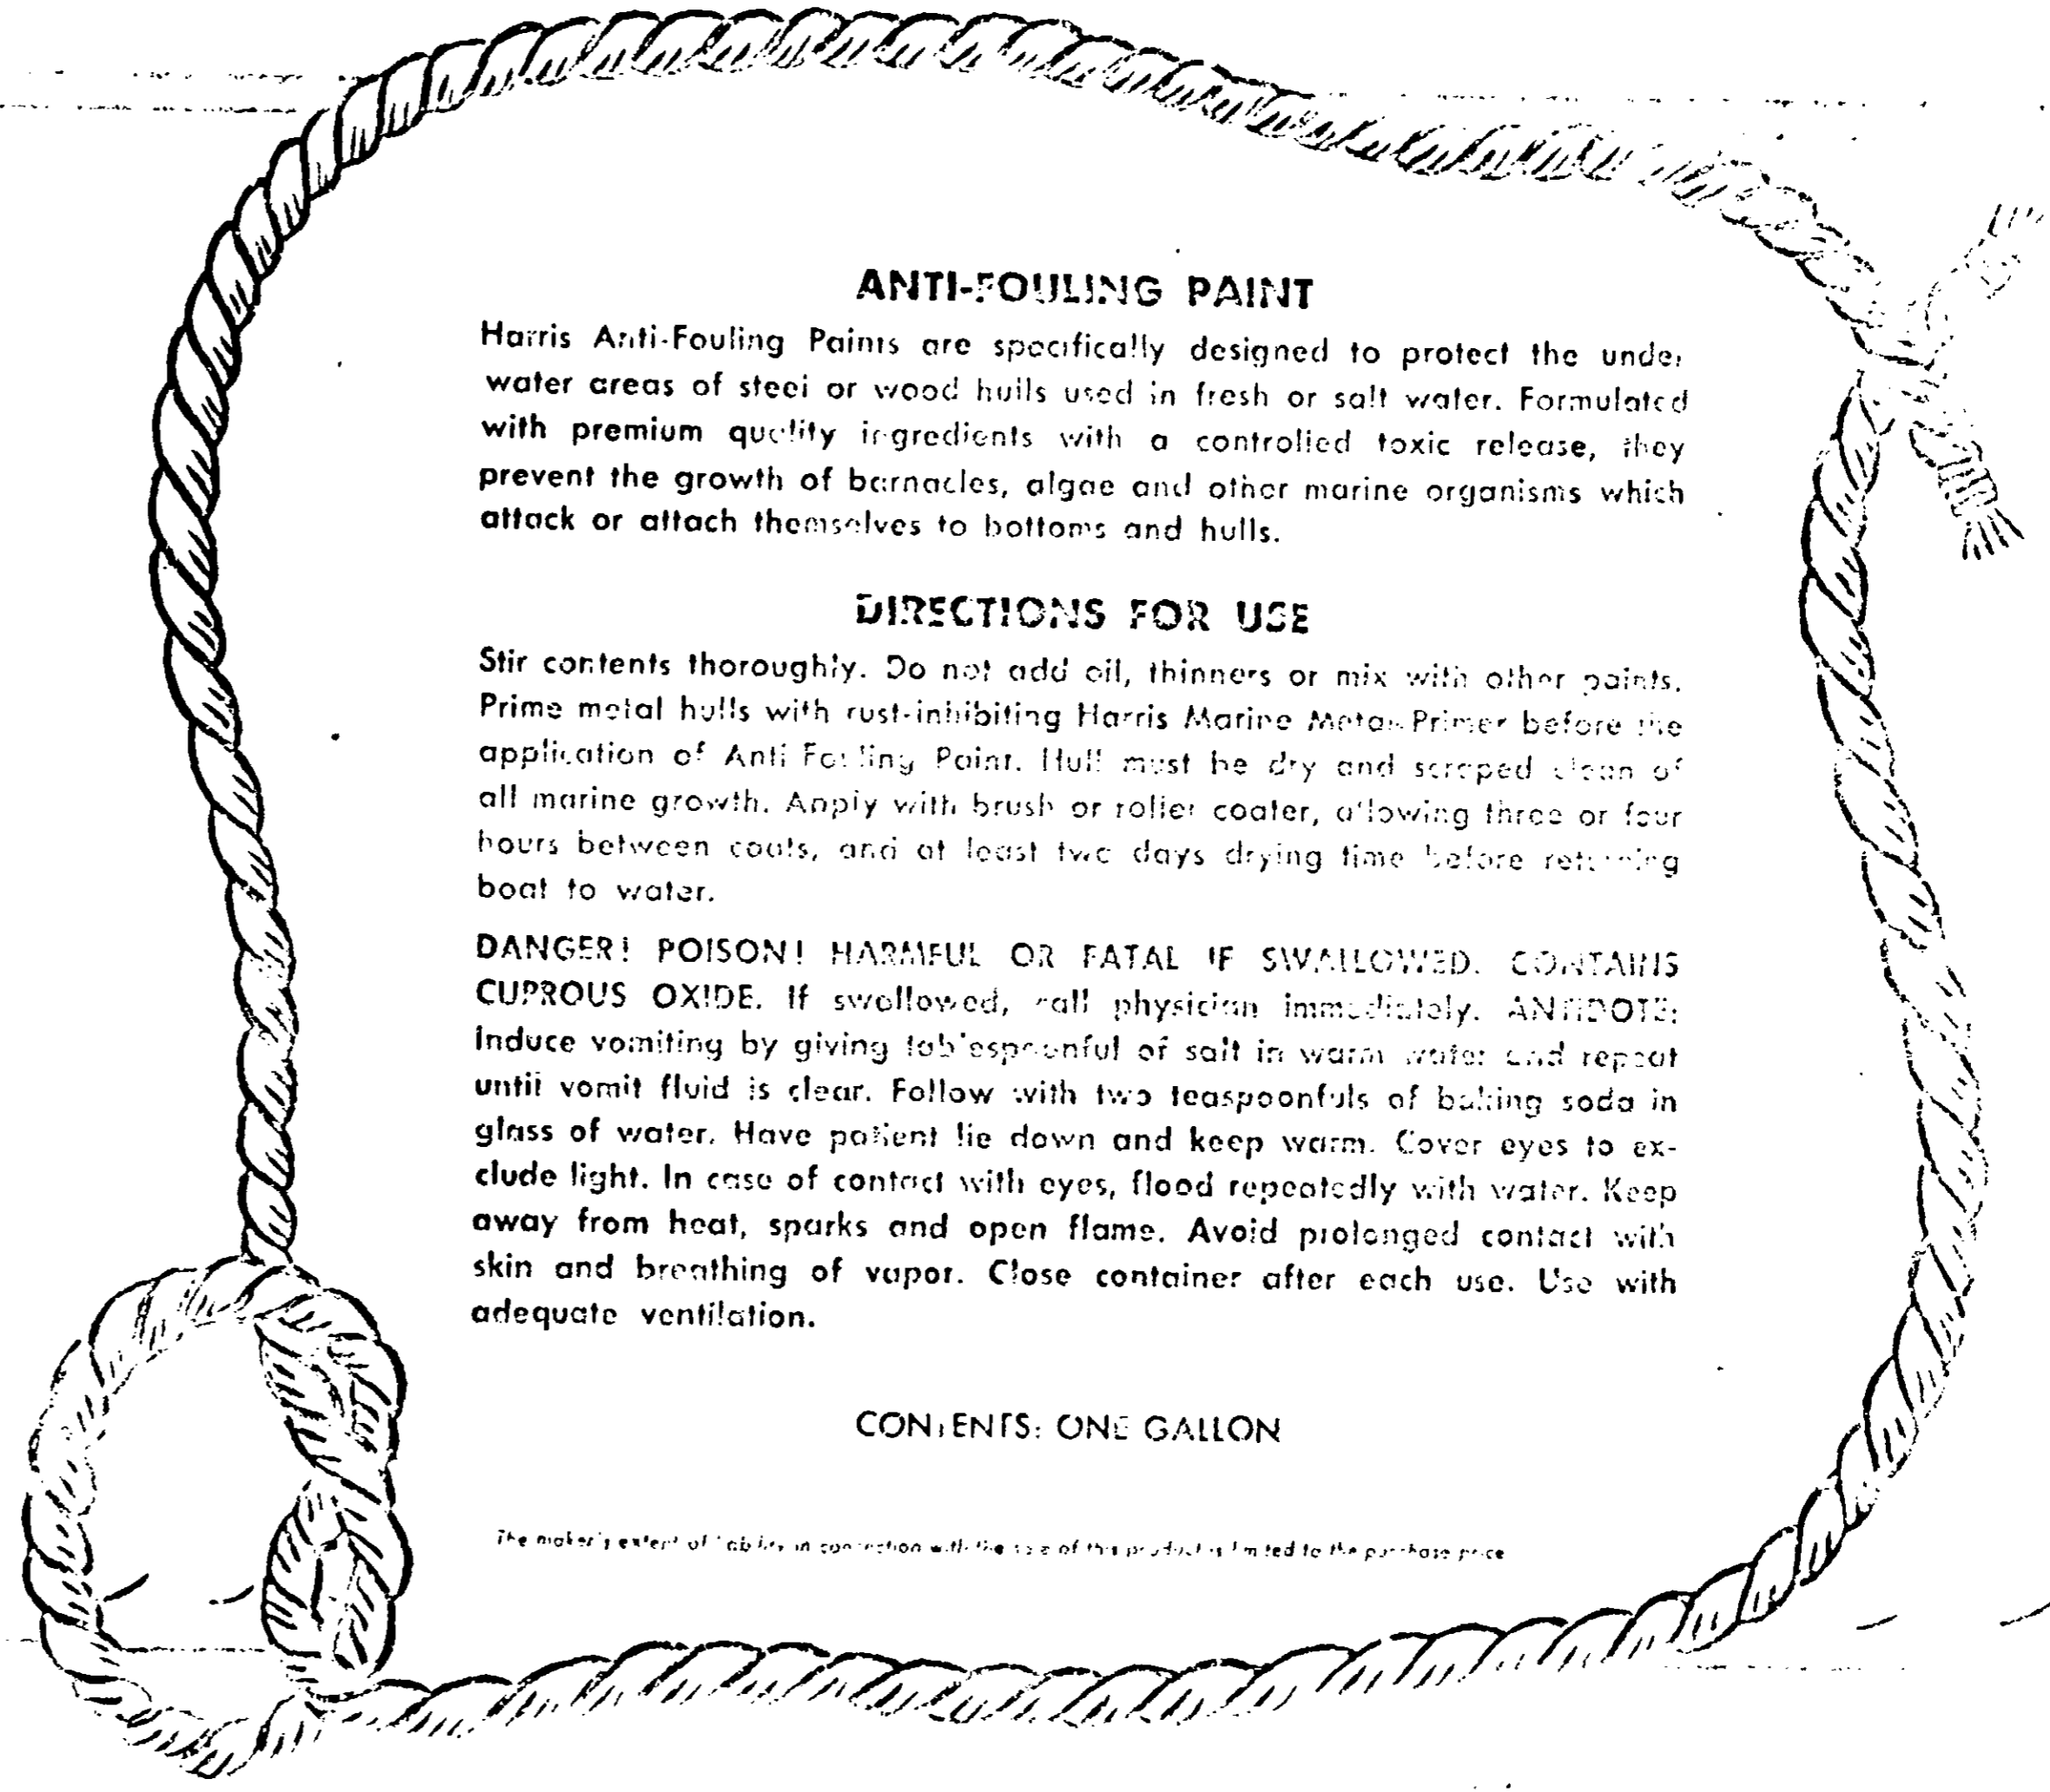

**ANTI-FOULING PAINT**

Harris Anti-Fouling Paints are specifically designed to protect the under-  
water areas of steel or wood hulls used in fresh or salt water. Formulated  
with premium quality ingredients with a controlled toxic release, they  
prevent the growth of barnacles, algae and other marine organisms which  
attack or attach themselves to bottoms and hulls.

**DIRECTIONS FOR USE**

Stir contents thoroughly. Do not add oil, thinners or mix with other paints.  
Prime metal hulls with rust-inhibiting Harris Marine Metal-Primer before the  
application of Anti-Fouling Paint. Hull must be dry and scraped clean of  
all marine growth. Apply with brush or roller coater, allowing three or four  
hours between coats, and at least two days drying time before returning  
boat to water.

**DANGER! POISON! HARMFUL OR FATAL IF SWALLOWED. CONTAINS  
CUPROUS OXIDE.** If swallowed, call physician immediately. **ANTIDOTE:**  
Induce vomiting by giving 1/2 teaspoonful of salt in warm water and repeat  
until vomit fluid is clear. Follow with two teaspoonfuls of baking soda in  
glass of water. Have patient lie down and keep warm. Cover eyes to ex-  
clude light. In case of contact with eyes, flood repeatedly with water. Keep  
away from heat, sparks and open flame. Avoid prolonged contact with  
skin and breathing of vapor. Close container after each use. Use with  
adequate ventilation.

CONTENTS: ONE GALLON

The maker's extent of liability in connection with the use of this product is limited to the purchase price.