


DANGER!  
KEEP OUT OF  
THE REACH OF  
CHILDREN

POISON!  
SEE ANTIDOTE STATE-  
MENT ON BACK LABEL

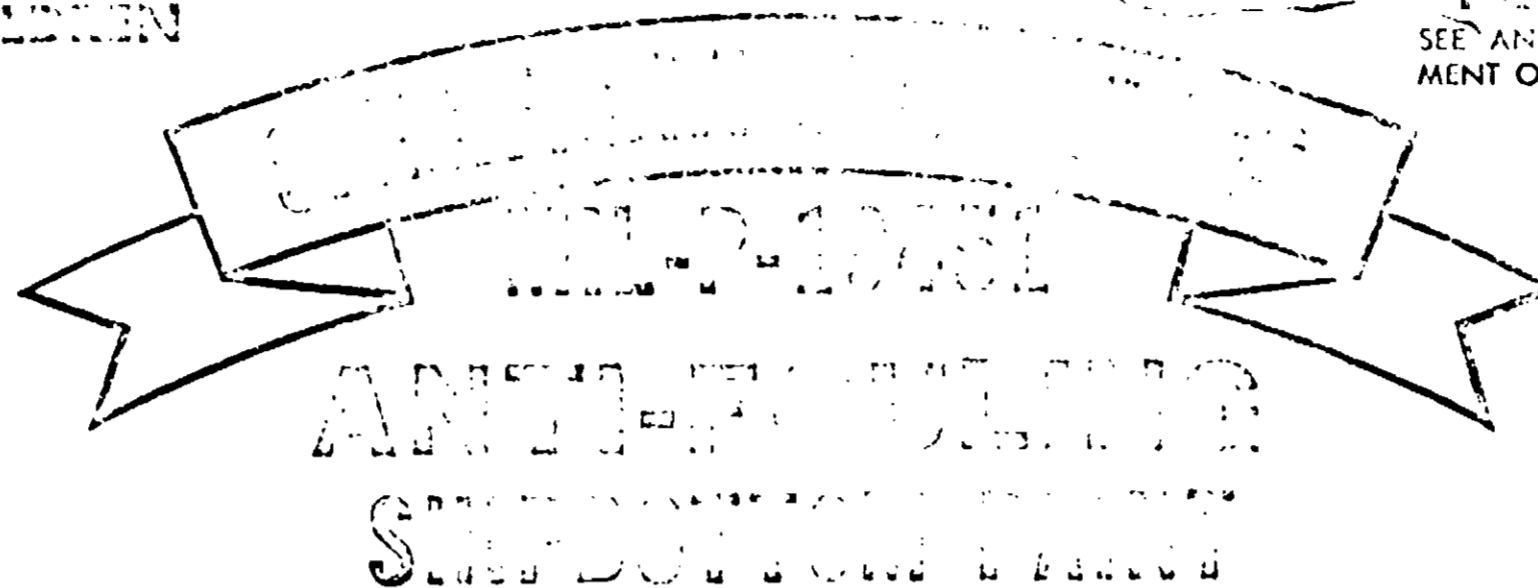

NAVY FORMULA  
No. 105

Active Ingredient	40.3%
Inert Ingredients	59.7%
	100.0%

HYPERIC PAINT COMPANY  
TRADE MARK

ACCEPTED  
SEP 28 1970  
UNDER THE FEDERAL INSTITUTE OF  
FUNGICIDE AND ROVING  
FOR ECONOMIC POISONS BEING  
ED UNDER NO. 227-4 SUBJECT  
TO ATTACHED COMMENTS.

USCA 111 NO  
227-4

MIL-P-19451

ANTI-FOULING COLD PLASTIC SHIPBOTTOM PAINT  
NAVY FORMULA 105

This material has been carefully formulated in accordance with specifications covered in Navy Formula No. 105 anti-fouling shipbottom paint for use on underwater areas of naval and commercial ships.

DIRECTIONS

Area to be coated must be dry, clean and free of oil, grease, tar and marine growth. Metal hulls should be primed with an anti-corrosive primer, applied in accordance with specifications. This paint can be applied at ordinary atmospheric temperatures without melting. It sets to touch in 10 minutes and dries firm in 4 hours. Allow 4-6 hours drying time between coats and before launching.

Clean painting equipment with solvent naphtha.  
DANGER! POISON! HARMFUL OR FATAL IF SWALLOWED. CONTAINS CUPROUS OXIDE. If swallowed, call physician immediately. ANTIDOTE: Induce vomiting by giving tablespoonful of salt in warm water and repeat until vomit fluid is clear. Follow with two teaspoonfuls of baking soda in glass of water. Have patient lie down and keep warm. Cover eyes to exclude light. In case of contact with eyes, flood repeatedly with water. Keep away from heat, sparks and open flame. Avoid prolonged contact with skin and breathing of vapor. Close container after each use. Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN.

The maker's extent of liability in connection with the sale of this product is limited to the purchase price.

CONTENTS: FIVE GALLONS—U. S. STANDARD MEASURE