


DANGER!
KEEP OUT OF
THE REACH OF
CHILDREN

WARNING

POISONOUS AND

SEE ANTI-DOTE STATEMENT ON BACK LABEL

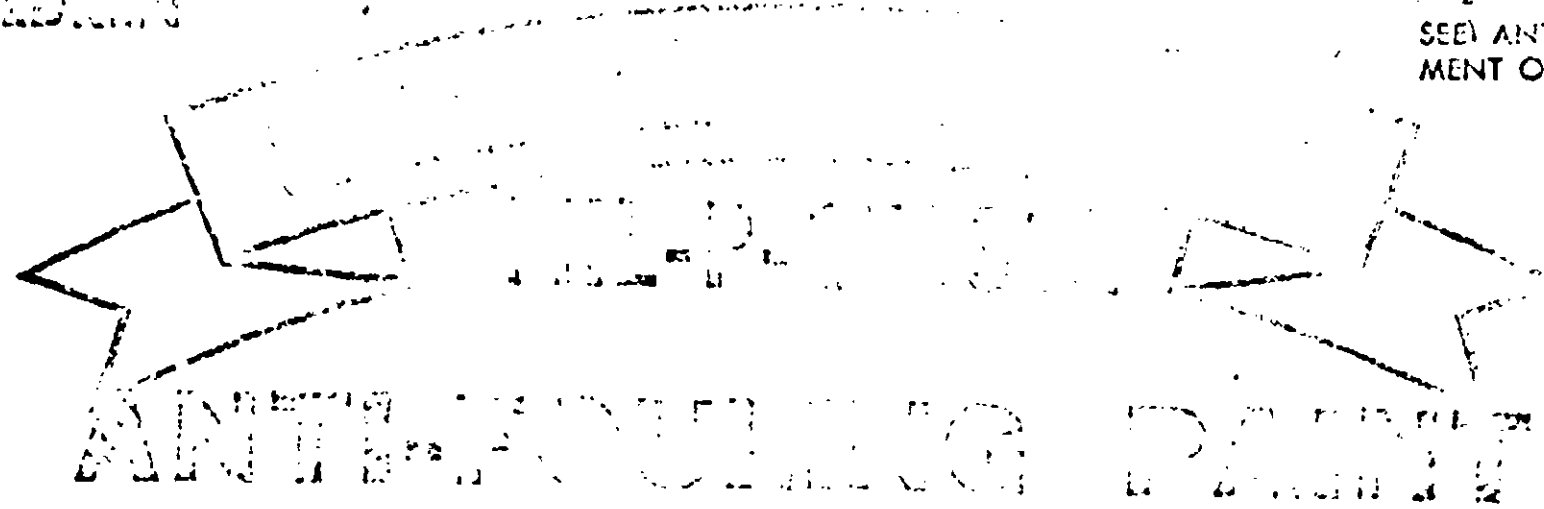

ANTI-FOULING PAINT

VINYL RED

**NAVY FORMULA
No. 121**

RED

Active Ingredient	55.0%	55.0%
Cuprous Oxide	55.0%	
Inert Ingredients	45.0%	100.0%

Cameraman's Note
Poor Copy

CHARLES W. BROWN COMPANY
P.O. BOX 100
NEW YORK, N.Y.

ACCEPTED

SEP 28 1970

UNDER THE FEDERAL INSECTICIDE
FUNGICIDE AND RODENTICIDE ACT
FOR ECONOMIC POISON REGISTERED
UNDER NO. 65355 SUBJECT
TO ATTACHED COMMENTS.

USDA Log No
8513-5

**MIL-P-15931 A
ANTI-FOULING PAINT, VINYL RED
NAVY FORMULA NO. 121**

The material in this container is made in accordance with Formula No. 121, covering an anti-fouling vinyl-red paint for use over a system consisting of pretreatment, wash primer and a vinyl lead primer or zinc chromate primer.

DIRECTIONS

Refer to JAN-C-490, Section 51, Grade 1B, for mechanical cleaning and preparation of ferrous metal surfaces for organic protective coatings; MIL-P-15923 Pretreatment, Wash Primer; MIL-P-15929-Primer, Vinyl Red Lead; MIL-P-15930-Primer, Vinyl Zinc Chromate type for application specifications applicable to pretreatment and priming.

This material is intended for use by professional shipyard painters and applied in accordance with manufacturers recommendations for application with specific equipment utilized.

Under normal atmospheric conditions, this material sets to touch in 15 minutes and dries hard in 45 minutes. Where multiple coats are specified, allow 3-4 hours drying time. Film should be allowed to air cure 4 hours before touchment.

DANGER! POISON! HARMFUL OR FATAL IF SWALLOWED. CONTAINS CUPROUS OXIDE. If swallowed, call physician immediately. **ANTIDOTE:** Induce vomiting by giving tablespoonful of salt in warm water and repeat until vomit fluid is clear. Follow with two teaspoonfuls of baking soda in glass of water. Have patient lie down and keep warm. Cover eyes to exclude light. In case of contact with eyes, flood repeatedly with water. Keep away from heat, sparks and open flames. Avoid prolonged contact with skin and breathing apparatus. Close container when not in use. Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN.

The maker's liability in connection with this product is limited to the purchase price.

CONTENTS: FIVE GALLONS - U. S. STANDARD MEASURE

Do NOT GET IN
EYES OR ON SKIN
AFTER HANDLING