

# MOGUL AG-414

For control of algae, bacteria and fungi in commercial and industrial water cooling towers.

## Use and Application:

Prior to using Mogul AG-414, systems must be cleaned to remove algal growth, microbiological slime and other deposits. Initial dosage of Mogul AG-414 should be 16.74 to 41.7 fluid ounces of the product per 1000 gallons of water (133 to 332 parts per million). Continuing dosages should be applied at 4.17 to 41.7 fluid ounces per 1000 gallons of water (33.2 to 322 parts per million) at intervals of 2 to 5 days depending upon the relative amount of bleedoff, or as needed to maintain satisfactory control. Slug additions should be made in the sump of water cooling towers.

## Handling Precautions:

**CAUTION:** Keep out of the reach of children.

Harmful if swallowed, inhaled or absorbed through the skin. Avoid contact with skin and eyes. In case of contact flush with plenty of water for at least 15 minutes. If eye irritation persists get medical attention. Avoid contamination of food.


Do not use empty drum. Return to drum reconditioner or destroy by perforating or crushing and burying in a safe place.

This product is toxic to fish. Do not add treated effluent to lakes, streams or ponds. Do not contaminate water by cleaning of equipment or disposal of waste. Use only as directed on label.

## Ingredient:

Active —	
Poly [oxyethylene (dimethyliminio) ethylene (dimethyliminio) ethylene dichloride] .....	3.6%
Inert .....	96.4%
	100.0%

\*Equivalent to 0.30 pounds per gallon

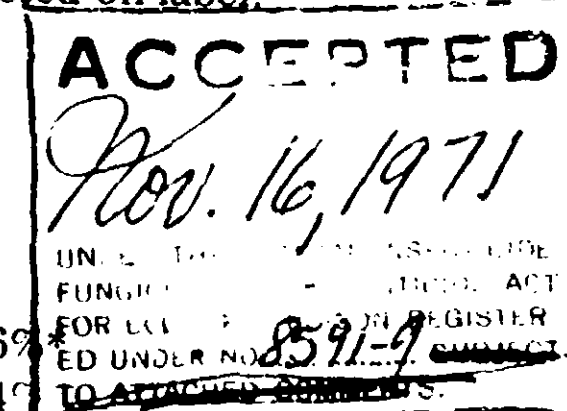

## THE MOGUL CORPORATION

Chicago, Illinois • Charlotte, N.C. • Phoenix, Arizona  
Arlington, Texas • Wilmington, Mass. • Portland, Maine