

**DIRECTIONS FOR USE AND CONDITIONS OF SALES,
WARRANTY AND LIMITATION OF DAMAGE PROVISION**

IMPORTANT: READ THESE ENTIRE DIRECTIONS, CONDITIONS OF SALE, WARRANTY AND LIMITATION OF DAMAGE PROVISION, BEFORE USING BGC-8 EC.

CONDITIONS OF SALE: THESE DIRECTIONS FOR USE REFLECT THE OPINION OF EXPERTS BASED ON TESTS OF EFFECTIVENESS UNDER NORMAL CONDITIONS OF USE. HOWEVER, BECAUSE OF THE WIDE RANGE OF CONDITIONS UNDER WHICH THIS PRODUCT MAY BE USED, EVEN THOUGH LABEL DIRECTIONS ARE FOLLOWED, IT IS IMPOSSIBLE TO ELIMINATE ALL RISKS ASSOCIATED WITH ITS USE BECAUSE OF ABNORMAL CONDITIONS BEYOND THE CONTROL OF THE SELLER. B&G COMPANY AND THE SELLER OFFER, AND THE BUYER USES, THIS PRODUCT SUBJECT TO THE UNDERSTANDING THAT THE BUYER ASSUMES ALL SUCH RISKS OF USE, STORAGE OR HANDLING OF THIS MATERIAL NOT IN STRICT ACCORDANCE WITH DIRECTIONS GIVEN HEREWITH.

WARRANTY AND LIMITATION OF DAMAGES: B&G COMPANY WARRANTS THAT THIS MATERIAL CONFORMS TO THE CHEMICAL DESCRIPTION ON THE LABEL AND IS REASONABLY FIT FOR THE PURPOSES REFERRED TO IN THE DIRECTIONS, CONDITIONS OF SALE; SUBJECT TO RISKS REFERRED TO THEREIN. B&G COMPANY MAKES NO OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS OR OF MERCHANTABILITY OR ANY OTHER EXPRESS OR IMPLIED WARRANTY, AND NO AGENT OF B&G COMPANY IS AUTHORIZED TO DO SO EXCEPT IN WRITING, WITH A SPECIFIC REFERENCE TO THIS WARRANTY. IN NO CASE SHALL B&G COMPANY OR THE SELLER BE LIABLE FOR CONSEQUENTIAL, SPECIAL OR INDIRECT DAMAGES RESULTING FROM THE USE OR HANDLING OF THIS PRODUCT WHEN THIS PRODUCT IS NOT USED IN ACCORDANCE WITH THE DIRECTIONS GIVEN HEREWITH.

ANTIDOTE

EXTERNAL: IN CASE OF SPILLAGE ON SKIN WASH PROMPTLY WITH SOAP & WATER.
INTERNAL: EMETIC OF 1 TABLESPOONFUL MUSTARD IN TUMBLER OF WATER. CALL A PHYSICIAN.


CONTAINER DISPOSAL

RINSE EQUIPMENT AND CONTAINERS AND DISPOSE OF WASTES BY BURYING IN NON-CROP LANDS AWAY FROM WATER SUPPLIES. CONTAINERS SHOULD BE DISPOSED OF BY PUNCHING HOLES IN THEM AND BURYING WITH WASTES, OR BY BURNING. KEEP OUT OF SMOKE.

FISH & WILDLIFE CAUTION

THIS PRODUCT IS TOXIC TO FISH, BIRDS AND OTHER WILDLIFE. BIRDS AND OTHER WILDLIFE FEEDING ON TREATED AREAS MAY BE KILLED. KEEP OUT OF LAKES, STREAMS OR PONDS. DO NOT APPLY WHERE RUNOFF IS LIKELY TO OCCUR. DO NOT APPLY WHEN WEATHER CONDITIONS FAVOR DRIFT FROM AREAS TREATED. DO NOT CONTAMINATE WATER BY CLEANING OF EQUIPMENT OR DISPOSAL OF WASTES. APPLY THIS PRODUCT ONLY AS SPECIFIED ON THIS LABEL.

ACCEPTED
 NOV 4 1975
 Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended, for the pesticide registered under EPA Reg. No. 8612-5612-04

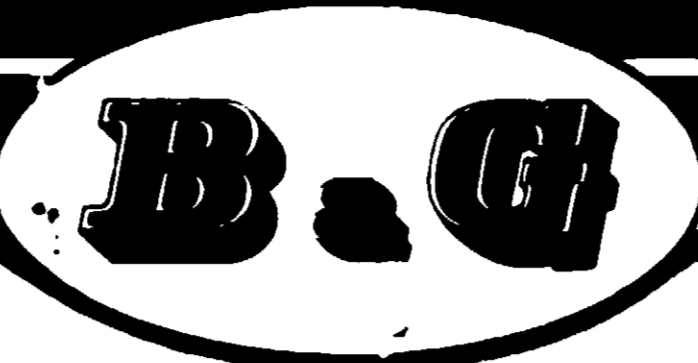

**BGC-8
TERMITICIDE
EMULSIFIABLE CONCENTRATE**

FOR USE BY PROFESSIONAL PEST CONTROL TECHNICIANS ONLY

ACTIVE INGREDIENTS:

*TECHNICAL CHLORDANE.....	72.0%
PETROLEUM DISTILLATE.....	28.0%
INERT INGREDIENTS	7.0%
TOTAL	100.0%

*EQUIVALENT TO 43.2% OCTACHLORO-4,7-METHANOTETRAHYDROINDANE AND 28.8% RELATED COMPOUNDS.

CONTAINS 8.0 LBS. ACTUAL CHLORDANE PER GALLON.

WARNING: KEEP OUT OF REACH OF CHILDREN

SEE SIDE PANELS FOR ADDITIONAL WARNINGS.

CAUTION: COMBUSTIBLE MIXTURE

DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME.

WARNING

MAY BE FATAL IF SWALLOWED. CONTACT WITH SKIN CAN CAUSE TOXIC SYMPTOMS. AVOID BREATHING VAPORS OR SPRAY MIST. IN CASE OF CONTACT WITH SKIN, WASH WITH SOAP AND WATER. AVOID CONTAMINATION OF FEED AND FOODSTUFFS. KEEP OUT OF REACH OF CHILDREN.

EPA Reg. No. 8612-56
EPA Est. # 8612-TX-1220K-1



DALLAS, TEXAS 75220

NET CONTENTS 5 GALLONS
LABEL # 10065-4

**DIRECTIONS FOR USE
PRE-CONSTRUCTION TREATMENT**

TERMITE CONTROL

1. MEET ALL TERMITE PREVENTION REQUIREMENTS AND THE LATEST EDITIONS OF THE HOUSE AND URBAN DEVELOPMENT CODES MINIMUM PROPERTY STANDARDS.

2. DO NOT ALLOW TERMITES TO INFEST LAND TO BE TREATED. OF WATER FROM EMISSIONS. APPLY THE EMULSION AS FOLLOWS:

WHEN APPLICATION IS BY PUMPING, PUMP SHOULD BE INSERTED NEAR TO THE BASE OF THE FOOTINGS. APPLICATIONS SHOULD BE MADE BY PRESSURE APPLIED THROUGH THE TUBE.

CONCRETE SLAB-ON-GROUND CONSTRUCTION

1. APPLY AN OVER-ALL TREATMENT UNDER ENTIRE SURFACE OF FLOOR SLAB. APPLY AT THE RATE OF 1 GALLON PER 10 SQUARE FEET, EXCEPT THAT IF FILL UNDER SLAB IS GRAVEL OR COARSE ABSORBENT MATERIAL, APPLY AT RATE OF 1 GALLON PER 10 SQUARE FEET.
2. UNDER SLAB-ON-GROUND PORCH FLOORS AND ENTRANCE PLATFORMS APPLY AN OVER-ALL TREATMENT AT THE RATE OF 1 GALLON PER 10 SQUARE FEET.
3. ALONG BOTH SIDES OF FOUNDATION WALLS, ALONG INTERIOR FOUNDATIONS WALLS, AND AROUND PLUMBING, DIG A NARROW TRENCH TO A DEPTH OF 12 TO 15 INCHES BUT NOT BELOW THE TOP OF THE FOOTING. ALONG OUTSIDE FOUNDATION WALLS, TRENCH SHOULD BE NO WIDER THAN SIX INCHES. APPLY AT THE RATE OF 2 GALLONS PER 5 LINEAR FEET OF TRENCH. THE CHEMICAL SHOULD BE MIXED WITH THE SOIL AS IT IS BEING REPLACED IN THE TRENCH. WHERE THE TOP OF THE FOOTING IS GREATER THAN 30 INCHES DEEP, DIG A TRENCH 12 TO 15 INCHES AND ROD TO FOOTING, SPACING THE HOLES 1 FOOT APART.
4. TREAT ALL VOIDS IN HOLLOW MASONRY UNITS OF THE FOUNDATION AT THE RATE OF AT LEAST 1 GALLON PER 5 LINEAR FEET OF WALL. APPLY THE EMULSION SO AS TO REACH THE FOOTING.

BUILDINGS WITH CRAWL SPACES

1. DIG A NARROW TRENCH TO THE TOP OF THE FOOTING ALONG THE INSIDE OF THE FOUNDATION WALLS, AROUND PIERS, SEWERS, PIPES AND CONDUITS. APPLY 2 GALLONS OF SOLUTION PER 5 LINEAR FEET. WHEN TRENCHING, CHEMICAL SHOULD BE MIXED WITH THE SOIL AS IT IS BEING REPLACED IN THE TRENCH. WHERE THE TOP OF THE FOOTING IS GREATER THAN 30 INCHES DEEP, DIG A TRENCH 12 TO 15 INCHES AND ROD TO FOOTING, SPACING THE HOLES 1 FOOT APART.
2. DIG A NARROW TRENCH TO THE TOP OF THE FOOTING ALONG THE OUTSIDE OF THE FOUNDATION WALL. IF A TRENCH IS DUG, IT SHOULD BE NO WIDER THAN SIX INCHES. APPLY 2 GALLONS OF SOLUTION PER 5 LINEAR FEET OF TRENCH PER EACH FOOT OF DEPTH. RODDING OR TRENCHING 3 FEET DEEP WOULD REQUIRE 2 GALLONS PER 5 LINEAR FEET. WHEN TRENCHING, CHEMICAL SHOULD BE MIXED WITH THE SOIL AS IT IS BEING REPLACED IN THE TRENCH. WHERE THE TOP OF THE FOOTING IS GREATER THAN 30 INCHES DEEP, DIG A TRENCH 12 TO 15 INCHES AND ROD TO FOOTING, SPACING THE HOLES 1 FOOT APART.

BUILDINGS WITH BASEMENTS

1. APPLY AN OVER-ALL TREATMENT UNDER BASEMENT FLOORINGS, AS WELL AS ATTACHED PORCHES, ENTRANCE PLATFORMS, UTILITY ENTRANCES AND SIMILAR WHERE SLAB FILL IS AT THE GRADE. APPLY AT THE RATE OF 1 GALLON PER 10 SQUARE FEET, EXCEPT THAT IF FILL UNDER SLAB IS OF WASHED GRAVEL, SIMILAR COARSE MATERIAL, INCREASE DOSAGE BY AT LEAST ONE-HALF.
2. IF CRAWL SPACES EXIST, TREAT AS IN PART 2 BELOW.
3. DIG A NARROW TRENCH TO THE TOP OF THE FOOTING ALONG THE INSIDE OF FOUNDATION WALLS, AROUND PIERS, SEWER PIPES AND CONDUITS. APPLY 2 GALLONS OF SOLUTION PER 5 LINEAR FEET. WHEN TRENCHING, CHEMICAL SHOULD BE MIXED WITH THE SOIL AS IT IS BEING REPLACED IN THE TRENCH. WHERE THE TOP OF THE FOOTING IS GREATER THAN 30 INCHES DEEP, DIG A TRENCH 12 TO 15 INCHES AND ROD TO FOOTING, SPACING THE HOLES ONE FOOT APART.

ALONG THE OUTSIDE OF FOUNDATION WALLS, DIG A NARROW TRENCH, SUCH TRENCH DUG NO DEEPER THAN THE TOP OF THE FOOTING. IF THE TRENCH IS LESS THAN 12 INCHES IN DEPTH TO THE TOP OF THE FOOTING, APPLY 1 GALLON PER 5 LINEAR FEET OF TRENCH. IF THE TRENCH IS MORE THAN 12 INCHES IN DEPTH TO THE TOP OF THE FOOTING, REPLACE THE SOIL AND APPLY TWO GALLONS PER 5 LINEAR FEET TO THE TRENCH. COVER THE BACK FILL WITH A THIN LAYER OF SOIL. IF THE TRENCH IS MORE THAN 12 INCHES IN DEPTH TO THE TOP OF THE FOOTING, APPLY 2 GALLONS PER 5 LINEAR FEET OF TRENCH. REPLACE THE SOIL AND APPLY TWO GALLONS PER 5 LINEAR FEET TO THE TRENCH. FILL WITH A THIN LAYER OF SOIL. IF THE TRENCH IS MORE THAN 30 INCHES DEEP IS A MAXIMUM DEPTH REQUIRED ALONGSIDE FOUNDATIONS WHERE THE TOP OF THE FOOTING IS GREATER THAN 30 INCHES DEEP. IN LIEU OF TRENCHING, DIG A 30 INCH DEPTH, MAKE THE TRENCH 15 INCHES DEEP AND ROD TO FOOTING. SPACING THE HOLES ABOUT 1 FOOT APART.

4. TREAT ALL VOIDS IN HOLLOW MASONRY UNITS OF THE FOUNDATION AT THE RATE OF 1 GALLON PER 5 LINEAR FEET OF WALL. APPLY THE EMULSION SO AS TO REACH THE FOOTING.

NS OF SALES
GE PROVISION

DIRECTIONS,
D LIMITATION
NG BGC-8 EC.

CTIONS FOR
RTS BASED
NORMAL CON-
SE OF THE
WHICH THIS
H LABEL OF-
POSSIBLE TO
WITH ITS USE
BEYOND THE
PANY AND THE
S, THIS PRO-
G THAT THE
Y USE, STORAGE
T IN STRICT
N HEREWITH.

GES: BGC
RIAL CONFORMS
THE LABEL AND
SES REFERRED
S OF SALE;
HEREIN. BGC
OR IMPLIED
ANTABILITY
WARRANTY,
AUTHORIZED
H A SPECIFIC
I NO CASE
R BE LIABLE
INDIRECT DAM-
HANDLING OF
T IS NOT
CTIONS

ON SKIN
SOAP & WATER.
ONFUL MUSTARD

AND DISPOSE
P LANDS
AINERS
NG HOLES
, OR BY

BIRDS AND
ER WILDLIFE
E KILLED.
ONDS DO
Y TO OCCUR.
IONS FAVOR
OT CONTAM-
PMENT OR
S PRODUCT

ACCEPTED
NOV 4 1975
Under the Federal Insecticide, Fungicide, and Rodenticide Act, registered under EPA Reg. No. 8612-56



BGC-8

TERMITICIDE

EMULSIFIABLE CONCENTRATE

FOR USE BY PROFESSIONAL PEST CONTROL TECHNICIANS ONLY

ACTIVE INGREDIENTS:
*TECHNICAL CHLORDANE..... 72.0%
PETROLEUM DISTILLATE..... 28.0%
INERT INGREDIENTS:..... 7.0%
TOTAL 100.0%

*EQUIVALENT TO 43.2% OCTACHLORO-4,7-METHANOTETRAHYDROINDANE AND 28.8% RELATED COMPOUNDS.

CONTAINS 8.0 LBS. ACTUAL CHLORDANE PER GALLON.

WARNING: KEEP OUT OF REACH OF CHILDREN

SEE SIDE PANELS FOR ADDITIONAL WARNINGS.

CAUTION: COMBUSTIBLE MIXTURE

DO NOT USE, POUR, SPILL OR STORE NEAR
HEAT OR OPEN FLAME.

WARNING

MAY BE FATAL IF SWALLOWED. CONTACT WITH SKIN CAN CAUSE TOXIC SYMPTOMS. AVOID BREATHING VAPORS OR SPRAY MIST. IN CASE OF CONTACT WITH SKIN, WASH WITH SOAP AND WATER. AVOID CONTAMINATION OF FEED AND FOODSTUFFS. KEEP OUT OF REACH OF CHILDREN.

EPA Reg. No. 8612-56
EPA Est. # 8612-TX-1200-2



DALLAS, TEXAS 75220

NET CONTENTS 5 GALLONS
LABEL # 10065-4

DIRECTIONS FOR USE

PRE-CONSTRUCTION TREATMENT

TERMITE CONTROL

TO MEET EPA TERMITE PROOFING REQUIREMENTS, CONSULT THE DATE OF EJECTION OF THE HOUSING AND URBAN DEVELOPMENT (HUD) MINIMUM PROOFING STANDARDS.

2 GALLON EMULSION EMULSIFIABLE TO 1 GALLON OF WATER FOR 1 L INJECTION. APPLY THE EMULSION AS FOLLOWS:

WHEN APPLICATION IS BY RODDING, RODS SHOULD BE INSERTED ONE FOOT APART TO THE BASE OF THE FOOTINGS. APPLICATIONS SHOULD BE MADE BY PRESSURE APPLIED THROUGH THE TUBE.

CONCRETE SLAB-ON-GROUND CONSTRUCTION

1. APPLY AN OVER-ALL TREATMENT UNDER ENTIRE SURFACE OF FLOOR SLAB. APPLY AT THE RATE OF 1 GALLON PER 10 SQUARE FEET, EXCEPT THAT IF FILL UNDER SLAB IS GRAVEL OR OTHER COARSE ABSORBENT MATERIAL, APPLY AT THE RATE OF 1 GALLON PER 10 SQUARE FEET.
2. UNDER SLAB-ON-GROUND PORCH FLOORS AND ENTRANCE PLATFORMS APPLY AN OVER-ALL TREATMENT AT THE RATE OF 1 GALLON PER 10 SQUARE FEET.
3. ALONG BOTH SIDES OF FOUNDATION WALLS, AROUND INTERIOR FOUNDATIONS WALLS, AND AROUND PLUMBING, DIG A NARROW TRENCH TO A DEPTH OF 12 TO 15 INCHES BUT NOT BELOW THE TOP OF THE FOOTING. ALONG OUTSIDE FOUNDATION WALLS, TRENCH SHOULD BE NO WIDER THAN SIX INCHES. APPLY AT THE RATE OF 2 GALLONS PER 5 LINEAR FEET OF TRENCH. THE CHEMICAL SHOULD BE MIXED WITH THE SOIL AS IT IS BEING REPLACED IN THE TRENCH. WHERE THE TOP OF THE FOOTING IS GREATER THAN 30 INCHES DEEP, DIG A TRENCH 12 TO 15 INCHES AND ROD TO FOOTING, SPACING THE HOLES 1 FOOT APART.
4. TREAT ALL VOIDS IN HOLLOW MASONRY UNITS OF THE FOUNDATION AT THE RATE OF AT LEAST 1 GALLON PER 5 LINEAR FEET OF WALL. APPLY THE EMULSION SO AS TO REACH THE FOOTING.

BUILDINGS WITH CRAWL SPACES

1. DIG A NARROW TRENCH TO THE TOP OF THE FOOTING ALONG THE INSIDE OF THE FOUNDATION WALLS, AROUND PIERS, SEWERS, PIPES AND CONDUITS. APPLY 2 GALLONS OF SOLUTION PER 5 LINEAR FEET. WHEN TRENCHING, CHEMICAL SHOULD BE MIXED WITH THE SOIL AS IT IS BEING REPLACED IN THE TRENCH. WHERE THE TOP OF THE FOOTING IS GREATER THAN 30 INCHES DEEP, DIG A TRENCH 12 TO 15 INCHES AND ROD TO FOOTING, SPACING THE HOLES 1 FOOT APART.
2. DIG A NARROW TRENCH TO THE TOP OF THE FOOTING ALONG THE OUTSIDE OF THE FOUNDATION WALL. IF A TRENCH IS DUG, IT SHOULD BE NO WIDER THAN SIX INCHES. APPLY 2 GALLONS OF SOLUTION PER 5 LINEAR FEET OF TRENCH PER EACH FOOT OF DEPTH. RODDING OR TRENCHING 3 FEET DEEP WOULD REQUIRE 6 GALLONS PER 5 LINEAR FEET. WHEN TRENCHING, CHEMICAL SHOULD BE MIXED WITH THE SOIL AS IT IS BEING REPLACED IN THE TRENCH. WHERE THE TOP OF THE FOOTING IS GREATER THAN 30 INCHES DEEP, DIG A TRENCH 12 TO 15 INCHES AND ROD TO FOOTING, SPACING THE HOLES 1 FOOT APART.

3. UNDER ATTACHED PORCHES, ENTRANCE PLATFORMS, UTILITY ENTRANCES AND SIMILAR SITUATIONS WHERE SLAB OR FILL IS AT THE SAME GRADE LEVEL APPLY 1 GALLON PER 10 SQUARE FEET OF SOIL SURFACE.
4. TREAT ALL VOIDS IN HOLLOW MASONRY UNITS OF THE FOUNDATION AT THE RATE OF AT LEAST 1 GALLON PER 5 LINEAR FEET OF WALL. APPLY THE EMULSION SO AS TO REACH THE FOOTING.

BUILDINGS WITH BASEMENTS

1. APPLY AN OVER-ALL TREATMENT UNDER THE BASEMENT FLOORINGS, AS WELL AS UNDER ATTACHED PORCHES, ENTRANCE PLATFORMS, UTILITY ENTRANCES AND SIMILAR SITUATIONS WHERE SLAB FILL IS AT THE GRADE LEVEL. APPLY AT THE RATE OF 1 GALLON PER 10 SQUARE FEET, EXCEPT THAT IF FILL UNDER SLAB IS OF WASHED GRAVEL, CINDERS OR SIMILAR COARSE MATERIAL, INCREASE THE DOSAGE BY AT LEAST ONE-HALF. WHERE CRAWL SPACES EXIST, TREAT AS DESCRIBED IN PART 2 BELOW.
2. DIG A NARROW TRENCH TO THE TOP OF THE FOOTING ALONG THE INSIDE OF FOUNDATION WALLS, AROUND PIERS, SEWER PIPES AND CONDUITS. APPLY 2 GALLONS OF SOLUTION PER 5 LINEAR FEET. WHEN TRENCHING,

CHEMICAL SHOULD BE MIXED WITH THE SOIL AS IT IS BEING REPLACED IN THE TRENCH. WHERE THE TOP OF THE FOOTING IS GREATER THAN 30 INCHES DEEP, DIG A TRENCH 12 TO 15 INCHES AND ROD TO FOOTING, SPACING THE HOLES ONE FOOT APART.

3. ALONG THE OUTSIDE OF FOUNDATION WALLS, DIG A NARROW TRENCH, SUCH TRENCH TO BE DUG NO DEEPER THAN THE TOP OF THE FOOTINGS. IF THE TRENCH IS LESS THAN 15 INCHES IN DEPTH TO THE TOP OF THE FOOTING, APPLY 1 GALLON PER 5 LINEAR FEET. REPLACE THE SOIL AND APPLY ANOTHER 1 GALLON PER 5 LINEAR FEET TO THE BACK FILL. COVER THE BACK FILL WITH A THIN LAYER OF SOIL. IF THE TRENCH IS MORE THAN 15 INCHES IN DEPTH TO THE TOP OF THE FOOTING, APPLY 2 GALLONS PER 5 LINEAR FEET. REPLACE THE SOIL AND APPLY ANOTHER 2 GALLONS PER 5 LINEAR FEET TO THE BACK FILL WITH A THIN LAYER OF SOIL. A TRENCH 30 INCHES DEEP IS A MAXIMUM DEPTH REQUIRED ALONGSIDE FOUNDATIONS WHERE THE TOP OF THE FOOTING IS GREATER THAN 30 INCHES DEEP. IN LIEU OF TRENCHING TO A 30 INCH DEPTH, MAKE THE TRENCH 12 TO 15 INCHES DEEP AND ROD TO FOOTING, SPACING THE HOLES ABOUT 1 FOOT APART.
4. TREAT ALL VOIDS IN HOLLOW MASONRY UNITS OF THE FOUNDATION AT THE RATE OF 1 GALLON PER 5 LINEAR FEET OF WALL. APPLY THE EMULSION SO AS TO REACH THE FOOTING.

**DIRECTIONS FOR USE AND CONDITIONS OF SALE,
WARRANTY AND LIMITATION OF DAMAGE PROVISION**

**IMPORTANT: READ THESE ENTIRE DIRECTIONS,
CONDITIONS OF SALE, WARRANTY AND LIMITATION
OF DAMAGE PROVISION, BEFORE USING BGC-8 EC.**

CONDITIONS OF SALE: THESE DIRECTIONS FOR USE REFLECT THE OPINION OF EXPERTS BASED ON TESTS OF EFFECTIVENESS UNDER NORMAL CONDITIONS OF USE. HOWEVER, BECAUSE OF THE WIDE RANGE OF CONDITIONS UNDER WHICH THIS PRODUCT MAY BE USED, EVEN THOUGH LABEL DIRECTIONS ARE FOLLOWED, IT IS IMPOSSIBLE TO ELIMINATE ALL RISKS ASSOCIATED WITH ITS USE BECAUSE OF ABNORMAL CONDITIONS BEYOND THE CONTROL OF THE SELLER. BGC COMPANY AND THE SELLER OFFER, AND THE BUYER USES, THIS PRODUCT SUBJECT TO THE UNDERSTANDING THAT THE BUYER ASSUMES ALL SUCH RISKS OF USE, STORAGE OR HANDLING OF THIS MATERIAL NOT IN STRICT ACCORDANCE WITH DIRECTIONS GIVEN HERewith.

WARRANTY AND LIMITATION OF DAMAGES: BGC COMPANY WARRANTS THAT THIS MATERIAL CONFORMS TO THE CHEMICAL DESCRIPTION ON THE LABEL AND IS REASONABLY FIT FOR THE PURPOSES REFERRED TO IN THE DIRECTIONS, CONDITIONS OF SALE; SUBJECT TO RISKS REFERRED TO THEREIN. BGC COMPANY MAKES NO OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS OR OF MERCHANTABILITY OR ANY OTHER EXPRESS OR IMPLIED WARRANTY, AND NO AGENT OF BGC COMPANY IS AUTHORIZED TO DO SO EXCEPT IN WRITING, WITH A SPECIFIC REFERENCE TO THIS WARRANTY. IN NO CASE SHALL BGC COMPANY OR THE SELLER BE LIABLE FOR CONSEQUENTIAL, SPECIAL OR INDIRECT DAMAGES RESULTING FROM THE USE OR HANDLING OF THIS PRODUCT WHEN THIS PRODUCT IS NOT USED IN ACCORDANCE WITH THE DIRECTIONS GIVEN HERewith.

ANTIDOTE

EXTERNAL: IN CASE OF SPILLAGE ON SKIN WASH PROMPTLY WITH SOAP & WATER.
INTERNAL: EMETIC OF 1 TABLESPOONFUL MUSTARD IN TUMBLER OF WATER. CALL A PHYSICIAN.

CONTAINER DISPOSAL

RINSE EQUIPMENT AND CONTAINERS AND DISPOSE OF WASTE BY BURYING IN NON-CROP LANDS AWAY FROM WATER SUPPLIES. CONTAINERS SHOULD BE DISPOSED OF BY PUNCHING HOLES IN THEM AND BURYING WITH WASTES, OR BY BURNING. KEEP OUT OF SMOKE.

FISH & WILDLIFE CAUTION

THIS PRODUCT IS TOXIC TO FISH, BIRDS AND OTHER WILDLIFE. BIRDS AND OTHER WILDLIFE FEEDING ON TREATED AREAS MAY BE KILLED. KEEP OUT OF LAKES, STREAMS OR PONDS. DO NOT APPLY WHERE RUNOFF IS LIKELY TO OCCUR. DO NOT APPLY WHEN WEATHER CONDITIONS FAVOR DRIFT FROM AREAS TREATED. DO NOT CONTAMINATE WATER BY CLEANING OF EQUIPMENT OR DISPOSAL OF WASTES. APPLY THIS PRODUCT ONLY AS SPECIFIED ON THIS LABEL.

ACCEPTED
 NOV 4 1975
 Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended, for the pesticide registered under EPA Reg. No. 8612-1-26



**BGC-8
TERMITICIDE
EMULSIFIABLE CONCENTRATE**

FOR USE BY PROFESSIONAL PEST CONTROL TECHNICIANS ONLY

ACTIVE INGREDIENTS:

*TECHNICAL CHLORDANE.....	72.0%
PETROLEUM DISTILLATE.....	28.0%
INERT INGREDIENTS:.....	7.0%
TOTAL	100.0%

*EQUIVALENT TO 43.2% OCTACHLORO-4,7-METHANOTETRAHYDROINDANE AND 28.8% RELATED COMPOUNDS.

CONTAINS 8.0 LBS. ACTUAL CHLORDANE PER GALLON.

WARNING: KEEP OUT OF REACH OF CHILDREN

SEE SIDE PANELS FOR ADDITIONAL WARNINGS.

CAUTION: COMBUSTIBLE MIXTURE

DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME.

WARNING

MAY BE FATAL IF SWALLOWED. CONTACT WITH SKIN CAN CAUSE TOXIC SYMPTOMS. AVOID BREATHING VAPORS OR SPRAY MIST. IN CASE OF CONTACT WITH SKIN, WASH WITH SOAP AND WATER. AVOID CONTAMINATION OF FEED AND FOODSTUFFS. KEEP OUT OF REACH OF CHILDREN.

EPA Reg. No. 8612-56
EPA Est. # 8612-TX-1,2,OK-1



NET CONTENTS 5 GALLONS
LABEL # 10065-4

**DIRECTIONS FOR USE
PRE-CONSTRUCTION TREATMENT**

TERMITE CONTROL

1. USE THE FOLLOWING TERMITE PROOFING EQUIPMENTS, AND THE LATEST METHODS OF THE HOUSING AND CONSTRUCTION INDUSTRY TO MAINTAIN PROPER TERMITES PROOFING.

2. APPLICATION OF BGC-8 EC EMULSIONABLE CONCENTRATE TO THE FOUNDATION WALLS, EXCEPT WHERE THE FOUNDATION IS CONCRETE, SHOULD BE MADE BY RODDING OR TRENCHING.

3. APPLICATION OF BGC-8 EC EMULSIONABLE CONCENTRATE TO THE FOUNDATION WALLS, EXCEPT WHERE THE FOUNDATION IS CONCRETE, SHOULD BE MADE BY RODDING OR TRENCHING.

CONCRETE SLAB-ON-GROUND CONSTRUCTION

1. APPLY AN OVER-ALL TREATMENT UNDER ENTIRE SURFACE OF FLOOR SLAB. APPLY AT THE RATE OF 1 GALLON PER 10 SQUARE FEET, EXCEPT THAT IF FILL UNDER SLAB IS GRAVEL OR OTHER COARSE ABSORBENT MATERIAL, APPLY AT THE RATE OF 1 GALLON PER 10 SQUARE FEET.
2. UNDER SLAB-ON-GROUND PORCH FLOORS AND ENTRANCE PLATFORMS APPLY AN OVER-ALL TREATMENT AT THE RATE OF 1 GALLON PER 10 SQUARE FEET.
3. ALONG BOTH SIDES OF FOUNDATION WALLS, ALONG INTERIOR FOUNDATIONS WALLS, AND AROUND PLUMBING, DIG A NARROW TRENCH TO A DEPTH OF 12 TO 15 INCHES BUT NOT BELOW THE TOP OF THE FOOTING. ALONG OUTSIDE FOUNDATION WALLS, TRENCH SHOULD BE NO WIDER THAN SIX INCHES. APPLY AT THE RATE OF 2 GALLONS PER 5 LINEAR FEET OF TRENCH. THE CHEMICAL SHOULD BE MIXED WITH THE SOIL AS IT IS BEING REPLACED IN THE TRENCH. WHERE THE TOP OF THE FOOTING IS GREATER THAN 30 INCHES DEEP, DIG A TRENCH 12 TO 15 INCHES AND ROD TO FOOTING, SPACING THE HOLES 1 FOOT APART.
4. TREAT ALL VOIDS IN HOLLOW MASONRY UNITS OF THE FOUNDATION AT THE RATE OF AT LEAST 1 GALLON PER 5 LINEAR FEET OF WALL. APPLY THE EMULSION SO AS TO REACH THE FOOTING.

BUILDINGS WITH CRAWL SPACES

1. DIG A NARROW TRENCH TO THE TOP OF THE FOOTING ALONG THE INSIDE OF THE FOUNDATION WALLS, AROUND PIERS, SEWERS, PIPES AND CONDUITS. APPLY 2 GALLONS OF SOLUTION PER 5 LINEAR FEET. WHEN TRENCHING, CHEMICAL SHOULD BE MIXED WITH THE SOIL AS IT IS BEING REPLACED IN THE TRENCH. WHERE THE TOP OF THE FOOTING IS GREATER THAN 30 INCHES DEEP, DIG A TRENCH 12 TO 15 INCHES AND ROD TO FOOTING, SPACING THE HOLES 1 FOOT APART.
2. DIG A NARROW TRENCH TO THE TOP OF THE FOOTING ALONG THE OUTSIDE OF THE FOUNDATION WALL. IF A TRENCH IS DUG, IT SHOULD BE NO WIDER THAN SIX INCHES. APPLY 2 GALLONS OF SOLUTION PER 5 LINEAR FEET OF TRENCH PER EACH FOOT OF DEPTH. RODDING OR TRENCHING 3 FEET DEEP WOULD REQUIRE 6 GALLONS PER 5 LINEAR FEET. WHEN TRENCHING, CHEMICAL SHOULD BE MIXED WITH THE SOIL AS IT IS BEING REPLACED IN THE TRENCH. WHERE THE TOP OF THE FOOTING IS GREATER THAN 30 INCHES DEEP, DIG A TRENCH 12 TO 15 INCHES AND ROD TO FOOTING, SPACING THE HOLES 1 FOOT APART.

3. UNDER ATTACHED PORCHES, UTILITY ENTRANCES, SITUATIONS WHERE THE SAME GRADE LEVEL IS 10 SQUARE FEET OR MORE, TREAT ALL VOIDS OF THE FOUNDATION AT THE RATE OF 1 GALLON PER 5 LINEAR FEET OF WALL. APPLY THE EMULSION SO AS TO REACH THE FOOTING.
4. TREAT ALL VOIDS OF THE FOUNDATION AT THE RATE OF 1 GALLON PER 5 LINEAR FEET OF WALL. APPLY THE EMULSION SO AS TO REACH THE FOOTING.

BUILDINGS WITH

1. APPLY AN OVER-ALL TREATMENT UNDER ENTIRE SURFACE OF FLOOR SLAB. APPLY AT THE RATE OF 1 GALLON PER 10 SQUARE FEET, EXCEPT THAT IF FILL UNDER SLAB IS GRAVEL OR OTHER COARSE ABSORBENT MATERIAL, APPLY AT THE RATE OF 1 GALLON PER 10 SQUARE FEET.
2. UNDER SLAB-ON-GROUND PORCH FLOORS AND ENTRANCE PLATFORMS APPLY AN OVER-ALL TREATMENT AT THE RATE OF 1 GALLON PER 10 SQUARE FEET.
3. ALONG BOTH SIDES OF FOUNDATION WALLS, ALONG INTERIOR FOUNDATIONS WALLS, AND AROUND PLUMBING, DIG A NARROW TRENCH TO A DEPTH OF 12 TO 15 INCHES BUT NOT BELOW THE TOP OF THE FOOTING. ALONG OUTSIDE FOUNDATION WALLS, TRENCH SHOULD BE NO WIDER THAN SIX INCHES. APPLY AT THE RATE OF 2 GALLONS PER 5 LINEAR FEET OF TRENCH. THE CHEMICAL SHOULD BE MIXED WITH THE SOIL AS IT IS BEING REPLACED IN THE TRENCH. WHERE THE TOP OF THE FOOTING IS GREATER THAN 30 INCHES DEEP, DIG A TRENCH 12 TO 15 INCHES AND ROD TO FOOTING, SPACING THE HOLES 1 FOOT APART.
4. TREAT ALL VOIDS IN HOLLOW MASONRY UNITS OF THE FOUNDATION AT THE RATE OF AT LEAST 1 GALLON PER 5 LINEAR FEET OF WALL. APPLY THE EMULSION SO AS TO REACH THE FOOTING.

CHEMICAL SHOULD BE MIXED WITH THE SOIL AS IT IS BEING REPLACED IN THE TRENCH. WHERE THE TOP OF THE FOOTING IS GREATER THAN 30 INCHES DEEP, DIG A TRENCH 12 TO 15 INCHES AND ROD TO FOOTING, SPACING THE HOLES 1 FOOT APART. DIG A NARROW TRENCH TO THE TOP OF THE FOOTING ALONG THE OUTSIDE OF THE FOUNDATION WALLS, AROUND PIERS, SEWERS, PIPES AND CONDUITS. APPLY 2 GALLONS OF SOLUTION PER 5 LINEAR FEET OF TRENCH. WHEN TRENCHING, CHEMICAL SHOULD BE MIXED WITH THE SOIL AS IT IS BEING REPLACED IN THE TRENCH. WHERE THE TOP OF THE FOOTING IS GREATER THAN 30 INCHES DEEP, DIG A TRENCH 12 TO 15 INCHES AND ROD TO FOOTING, SPACING THE HOLES 1 FOOT APART. DIG A NARROW TRENCH TO THE TOP OF THE FOOTING ALONG THE OUTSIDE OF THE FOUNDATION WALL. IF A TRENCH IS DUG, IT SHOULD BE NO WIDER THAN SIX INCHES. APPLY 2 GALLONS OF SOLUTION PER 5 LINEAR FEET OF TRENCH PER EACH FOOT OF DEPTH. RODDING OR TRENCHING 3 FEET DEEP WOULD REQUIRE 6 GALLONS PER 5 LINEAR FEET. WHEN TRENCHING, CHEMICAL SHOULD BE MIXED WITH THE SOIL AS IT IS BEING REPLACED IN THE TRENCH. WHERE THE TOP OF THE FOOTING IS GREATER THAN 30 INCHES DEEP, DIG A TRENCH 12 TO 15 INCHES AND ROD TO FOOTING, SPACING THE HOLES 1 FOOT APART.

SALES
VISION
NS,
ATION
8 EC.
FOR
ED
CON-
HE
HIS
DI-
E TO
S USE
THE
D THE
PROD-
THE
STORAGE
RICT
ITH.
SG
NFORMS
EL AND
FERRED
LE;
REG
LED
ITY
ITY,
ZED
CIFIC
IE
BLE
DAM-
G OF
IT
ATER.
USTARD
POSE
S
ND
IFE
DO
CUR.
AVOR
AM-
R
T



BGC-8 TERMITICIDE

EMULSIFIABLE CONCENTRATE

ACCEPTED

NOV 4 1975

Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended, for the pesticide registered under EPA Reg. No. 8612-56

FOR USE BY PROFESSIONAL PEST CONTROL TECHNICIANS ONLY

ACTIVE INGREDIENTS:

*TECHNICAL CHLORDANE.....	72.0%
PETROLEUM DISTILLATE.....	28.0%
INERT INGREDIENTS:..... 7.0%	
TOTAL	100.0%

*EQUIVALENT TO 43.2% OCTACHLORO-4,7-METHANOTETRAHYDROINDANE AND 28.8% RELATED COMPOUNDS.

CONTAINS 8.0 LBS. ACTUAL CHLORDANE PER GALLON.

WARNING: KEEP OUT OF REACH OF CHILDREN

SEE SIDE PANELS FOR ADDITIONAL WARNINGS.

CAUTION: COMBUSTIBLE MIXTURE

DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME.

WARNING

MAY BE FATAL IF SWALLOWED. CONTACT WITH SKIN CAN CAUSE TOXIC SYMPTOMS. AVOID BREATHING VAPORS OR SPRAY MIST. IN CASE OF CONTACT WITH SKIN, WASH WITH SOAP AND WATER. AVOID CONTAMINATION OF FEED AND FOODSTUFFS. KEEP OUT OF REACH OF CHILDREN.

EPA Reg. No. 8612-56
EPA Est.# 8612-TX-1,2,0X-1



NET CONTENTS 5 GALLONS
LABEL # 10065-4

DALLAS, TEXAS 75220

DIRECTIONS FOR USE PRE-CONSTRUCTION TREATMENT

TERMITE CONTROL

TO MEET EPA TERMITE PROOFING REQUIREMENTS, CONSULT THE LATEST EDITIONS OF THE HOUSING AND URBAN DEVELOPMENT (HUD) MINIMUM PROPERTY STANDARDS.

1 GALLON OF BGC-8 EMULSION IS APPLICABLE TO 10 SQUARE FEET OF WATER FOR A 2" EMULSION. APPLY THE EMULSION AS FOLLOWS:

WHEN APPLICATION IS BY PADDLING, RODS SHOULD BE INSERTED ONE FOOT APART TO THE BASE OF THE FOOTINGS. APPLICATIONS SHOULD BE MADE BY PRESSURE APPLIED THROUGH THE TUBE.

CONCRETE SLAB-ON-GROUND CONSTRUCTION

1. APPLY AN OVER-ALL TREATMENT UNDER ENTIRE SURFACE OF FLOOR SLAB. APPLY AT THE RATE OF 1 GALLON PER 10 SQUARE FEET, EXCEPT THAT IF FILL UNDER SLAB IS GRAVEL OR OTHER COARSE ABSORBENT MATERIAL, APPLY AT THE RATE OF 1 GALLON PER 10 SQUARE FEET.
2. UNDER SLAB-ON-GROUND PORCH FLOORS AND ENTRANCE PLATFORMS APPLY AN OVER-ALL TREATMENT AT THE RATE OF 1 GALLON PER 10 SQUARE FEET.
3. ALONG BOTH SIDES OF FOUNDATION WALLS, ALONG INTERIOR FOUNDATIONS WALLS, AND AROUND PLUMBING, DIG A NARROW TRENCH TO A DEPTH OF 12 TO 15 INCHES BUT NOT BELOW THE TOP OF THE FOOTING. ALONG OUTSIDE FOUNDATION WALLS, TRENCH SHOULD BE NO WIDER THAN SIX INCHES. APPLY AT THE RATE OF 2 GALLONS PER 5 LINEAR FEET OF TRENCH. THE CHEMICAL SHOULD BE MIXED WITH THE SOIL AS IT IS BEING REPLACED IN THE TRENCH. WHERE THE TOP OF THE FOOTING IS GREATER THAN 30 INCHES DEEP, DIG A TRENCH 12 TO 15 INCHES AND ROD TO FOOTING, SPACING THE HOLES 1 FOOT APART.
4. TREAT ALL VOIDS IN HOLLOW MASONRY UNITS OF THE FOUNDATION AT THE RATE OF AT LEAST 1 GALLON PER 5 LINEAR FEET OF WALL. APPLY THE EMULSION SO AS TO REACH THE FOOTING.

BUILDINGS WITH CRAWL SPACES

1. DIG A NARROW TRENCH TO THE TOP OF THE FOOTING ALONG THE INSIDE OF THE FOUNDATION WALLS, AROUND PIERS, SEWERS, PIPES AND CONDUITS. APPLY 2 GALLONS OF SOLUTION PER 5 LINEAR FEET. WHEN TRENCHING, CHEMICAL SHOULD BE MIXED WITH THE SOIL AS IT IS BEING REPLACED IN THE TRENCH. WHERE THE TOP OF THE FOOTING IS GREATER THAN 30 INCHES DEEP, DIG A TRENCH 12 TO 15 INCHES AND ROD TO FOOTING, SPACING THE HOLES 1 FOOT APART.
2. DIG A NARROW TRENCH TO THE TOP OF THE FOOTING ALONG THE OUTSIDE OF THE FOUNDATION WALL. IF A TRENCH IS DUG, IT SHOULD BE NO WIDER THAN SIX INCHES. APPLY 2 GALLONS OF SOLUTION PER 5 LINEAR FEET OF TRENCH PER EACH FOOT OF DEPTH. RODDING OR TRENCHING 3 FEET DEEP WOULD REQUIRE 6 GALLONS PER 5 LINEAR FEET. WHEN TRENCHING, CHEMICAL SHOULD BE MIXED WITH THE SOIL AS IT IS BEING REPLACED IN THE TRENCH. WHERE THE TOP OF THE FOOTING IS GREATER THAN 30 INCHES DEEP, DIG A TRENCH 12 TO 15 INCHES AND ROD TO FOOTING, SPACING THE HOLES 1 FOOT APART.

3. UNDER ATTACHED PORCHES, ENTRANCE PLATFORMS, UTILITY ENTRANCES AND SIMILAR SITUATIONS WHERE SLAB OR FILL IS AT THE SAME GRADE LEVEL APPLY 1 GALLON PER 10 SQUARE FEET OF SOIL SURFACE.
4. TREAT ALL VOIDS IN HOLLOW MASONRY UNITS OF THE FOUNDATION AT THE RATE OF AT LEAST 1 GALLON PER 5 LINEAR FEET OF WALL. APPLY THE EMULSION SO AS TO REACH THE FOOTING.

BUILDINGS WITH BASEMENTS

1. APPLY AN OVER-ALL TREATMENT UNDER THE BASEMENT FLOORINGS, AS WELL AS UNDER ATTACHED PORCHES, ENTRANCE PLATFORMS, UTILITY ENTRANCES AND SIMILAR SITUATIONS WHERE SLAB FILL IS AT THE GRADE LEVEL. APPLY AT THE RATE OF 1 GALLON PER 10 SQUARE FEET, EXCEPT THAT IF FILL UNDER SLAB IS OF WASHED GRAVEL, CINDEPS OR SIMILAR COARSE MATERIAL, INCREASE THE DOSAGE BY AT LEAST ONE-HALF. WHERE CRAWL SPACES EXIST, TREAT AS DESCRIBED IN PART 2 BELOW.
2. DIG A NARROW TRENCH TO THE TOP OF THE FOOTING ALONG THE INSIDE OF FOUNDATION WALLS, AROUND PIERS, SEWER PIPES AND CONDUITS. APPLY 2 GALLONS OF SOLUTION PER 5 LINEAR FEET. WHEN TRENCHING,

CHEMICAL SHOULD BE MIXED WITH THE SOIL AS IT IS BEING REPLACED IN THE TRENCH. WHERE THE TOP OF THE FOOTING IS GREATER THAN 30 INCHES DEEP, DIG A TRENCH 12 TO 15 INCHES AND ROD TO FOOTING, SPACING THE HOLES ONE FOOT APART.

3. ALONG THE OUTSIDE OF FOUNDATION WALLS, DIG A NARROW TRENCH, SUCH TRENCH TO BE DUG NO DEEPER THAN THE TOP OF THE FOOTINGS. IF THE TRENCH IS LESS THAN 15 INCHES IN DEPTH TO THE TOP OF THE FOOTING, APPLY 1 GALLON PER 5 LINEAR FEET. REPLACE THE SOIL AND APPLY ANOTHER 1 GALLON PER 5 LINEAR FEET TO THE BACK FILL. COVER THE BACK FILL WITH A THIN LAYER OF SOIL. IF THE TRENCH IS MORE THAN 15 INCHES IN DEPTH TO THE TOP OF THE FOOTING, APPLY 2 GALLONS PER 5 LINEAR FEET. REPLACE THE SOIL AND APPLY ANOTHER 2 GALLONS PER 5 LINEAR FEET TO THE BACK FILL WITH A THIN LAYER OF SOIL. A TRENCH 30 INCHES DEEP IS A MAXIMUM DEPTH REQUIRED ALONGSIDE FOUNDATIONS WHERE THE TOP OF THE FOOTING IS GREATER THAN 30 INCHES DEEP. IN LIEU OF TRENCHING TO A 30 INCH DEPTH, MAKE THE TRENCH 12 TO 15 INCHES DEEP AND ROD TO FOOTING, SPACING THE HOLES ABOUT 1 FOOT APART.
4. TREAT ALL VOIDS IN HOLLOW MASONRY UNITS OF THE FOUNDATION AT THE RATE OF 1 GALLON PER 5 LINEAR FEET OF WALL. APPLY THE EMULSION SO AS TO REACH THE FOOTING.