


RD

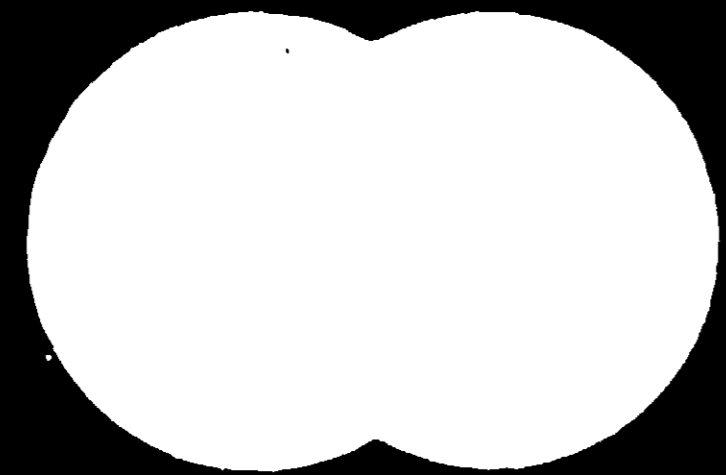

Coating

ing Highly Resistant to Algae, Barnacles and
g. For Use on Ship or Boat Bottoms.

Cuprous Oxide 542
452

FLAMMABLE!
PROTECT FROM HEAT OR OPEN FLAME.
DO NOT SWALLOWED
DANGEROUS TO CHILDREN

See instructions on right panel.
CHEMICAL COMPANY U.S.A.

Gallon • 3.785 Litres

ACCEPTED
March 26, 1976
NOTED THE FEDERAL INSECTICIDE
AND RODENTICIDE ACT
ECONOMIC POISON REGISTER
NUMBER NO. 5928-7 SUBJECT
ATTACHED COMMENTS.

Precautions

Keep away from heat, sparks, and open flame. Use with adequate ventilation. Avoid prolonged contact with skin and breathing of vapor or spray mist. Close container after each use.

Do not reuse container. Destroy when empty. Do not contaminate water by cleaning of equipment or disposal of wastes.

Directions for Use

Surface should be free of all grease, dirt and rust. Mix thoroughly and apply two or three coats of RUST-BAN VY 6504 Anti-Fouling Paint over properly primed surfaces. Apply by spray or roller.

Thin for spraying in the ratio of (1) volume RUST-BAN TH 6866 Thinner to (3) volumes of RUST-BAN VY 6504. Allow one hour dry

ing time between coats. Dry film thickness of the anti-fouling system should be 3 to 4 mils. The final coat should be applied immediately prior to launching the vessel.


CAUTION: Observe usual precautions against breathing the spray fumes. Use RUST-BAN TH 6866 to clean up spray equipment.

RUST-BAN VY 6504 Analysis - Wt. %

Pigment by Weight	
Cuprous Oxide	94.0
Barium Oxide	1.0
Iron Oxide	5.0
Vehicle by Weight	
Resin	10.0
Hardener	10.0
Filler	10.0
Thinner	10.0
Other	10.0

© 1976

Rust-Ban

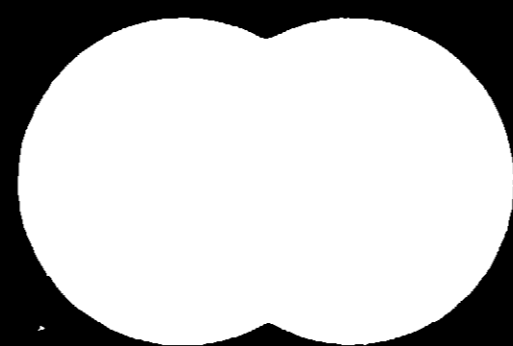

VY 6504 Anti-Fouling Protective Coating

A Hard Drying Coating Highly Resistant to Algae, Barnacles and Other Marine Fouling. For Use on Ship or Boat Bottoms.

ACTIVE INGREDIENT Cuprous Oxide 54.2
INERT INGREDIENTS 45.8
E.P.A. Reg. No. 89287


WARNING! FLAMMABLE!
KEEP AWAY FROM HEAT OR OPEN FLAME.
HARMFUL IF SWALLOWED
VAPOR HARMFUL

KEEP OUT OF REACH OF CHILDREN
See other Precautions on right panel.

EXXON CHEMICAL COMPANY U.S.A.

Houston, TX 77001

Net Contents 1 U.S. Gallon • 3.785 Litres
MADE IN U.S.A.

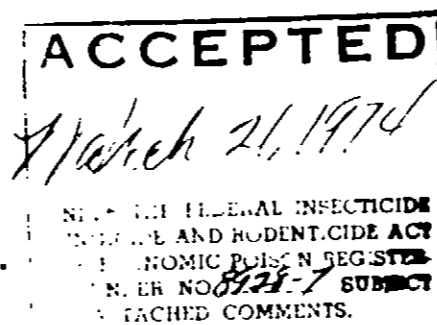

Precautions

Keep away from heat, sparks, and open flame. Use with adequate ventilation. Avoid prolonged contact with skin and breathing of vapor or spray mist. Close container after each use.

Do not reuse container. Destroy when empty. Do not contaminate water by cleaning of equipment or disposal of wastes.

Directions for Use

Surface should be free of all grease, dirt and rust. Mix thoroughly and apply two or three coats of RUST-BAN VY 6504 Anti-Fouling Paint over properly primed surfaces. Apply by spray or roller.

Thin for spraying in the ratio of (1) volume RUST-BAN TH 6866 Thinner to (3) volumes of RUST-BAN VY 6504. Allow one hour dry

ing time between coats. Dry film thickness of the anti-fouling system should be 3 to 4 mils. The final coat should be applied immediately prior to launching the vessel.

CAUTION: Observe usual precautions against breathing the spray fumes. Use RUST-BAN TH 6866 to clean up spray equipment.

RUST-BAN VY 6504 Analysis Wt. %

RUST-BAN VY 6504 Analysis Wt. %	
Pigment by Weight	
Cuprous Oxide	94.0
Vehicle	5.0
Vehicle by Weight	
Resin	1.0
Thinner	1.0
Other	1.0
Water	1.0
Other	1.0

© 1974 Exxon Chemical Company