

# Rust-Ban

## VY 5529

### Organometallic Anti-Fouling Protective Coating

A Hard Drying Coating Highly Resistant to Algae, Barnacles and Other Marine Fouling

ACTIVE INGREDIENTS TRIBUTYLTIN FLUORIDE .....16.9%  
INERT INGREDIENTS .....83.1%

E.P.A. Reg. No. 8928-13

**WARNING! FLAMMABLE!**

**KEEP AWAY FROM HEAT OR OPEN FLAME.**

**VAPOR HARMFUL**

**MAY CAUSE SEVERE EYE BURNS**

**MAY BE FATAL IF SWALLOWED**

**MAY CAUSE SKIN IRRITATION**

**KEEP OUT OF REACH OF CHILDREN**

See other Precautions on right panel.


**EXXON CHEMICAL COMPANY U.S.A.**

An operating division of EXXON CHEMICAL COMPANY, a division of EXXON CORPORATION

Houston, TX 77029

NET CONTENTS 5 U.S. GALLONS • 18.9 LITRES

Made in U.S.A.

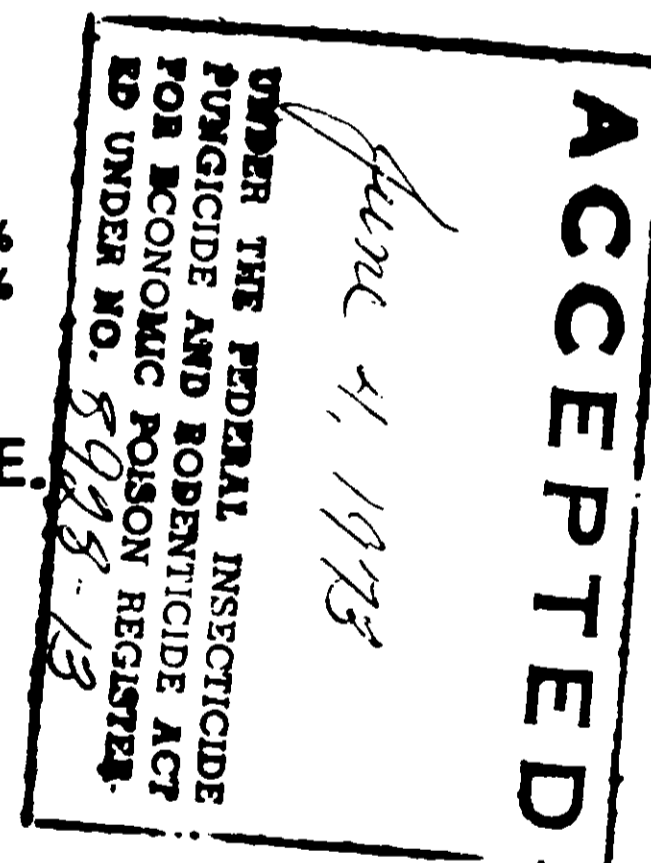

#### Precautions

Do not get in eyes, or  
Personnel applying the  
full face air mask and  
avoid skin and eye con-  
to vapor or mist. Keep  
open flame. Use with  
In case of contact, ir-  
with plenty of water f  
and call a physician;  
of soap and water.  
clothing before reuse.  
each use.

Do not contaminate  
equipment, or dispo  
this product only as s

#### Directions for Use

Surface should be fr  
and rust. Mix thoro

# EXXON

## CHEMICALS

# Anti-Fouling

Resistant to Algae, Barnacles


.....16.9%  
 .....83.1%

**BLE!**  
**HEAT OR OPEN FLAME.**

**EYE BURNS**  
**VALLOWED**  
**RITATION**  
**ILDREN**  
**panel.**

**AL COMPANY USA.**  
 COMPANY, a division of EXXON CORPORATION

**.LONS • 18.9 LITRES**

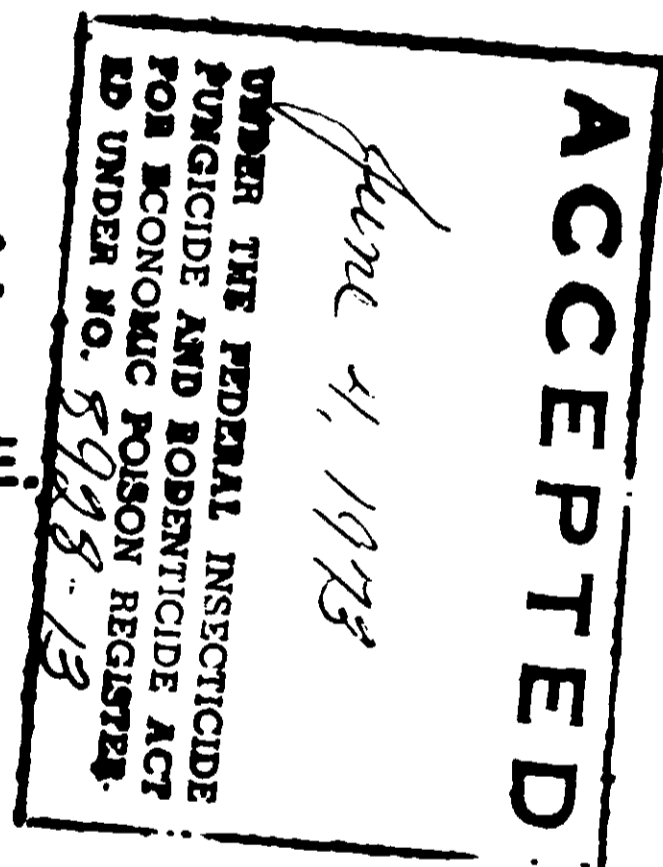

### Precautions

Do not get in eyes, on skin, or on clothing.

Personnel applying this paint should wear full face air mask and protective clothing to avoid skin and eye contact. Avoid exposure to vapor or mist. Keep away from heat and open flame. Use with adequate ventilation. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes and call a physician; wash skin with plenty of soap and water. Wash contaminated clothing before reuse. Close container after each use.

Do not contaminate water by cleaning of equipment, or disposal of wastes. Apply this product only as specified on this label.

### Directions for Use

Surface should be free of all grease, dirt and rust. Mix thoroughly and apply two

coats of RUST-BAN VY 5528 Anti-Fouling Paint over properly primed surfaces. Apply by roller or brush. While thinning is not normally required, RUST-BAN TH 6866 Thinner should be used when necessary.

Allow two hours drying time between coats. Dry film thickness of each anti-fouling coat should be 1.5 mils. Vessel should not be launched in less than six hours after application of final coat of anti-fouling.

Do not reuse containers. Destroy by perforating or crushing container and burying in a safe place.

#### RUST-BAN VY 5529 Analysis - Wt. %

Pigment .....	27.7	
Active tri-n-butyltin fluoride .....	61	
Inerts .....	<u>39</u>	
	100	
Vehicles .....		72.3
Non-volatiles .....	18.4	
Volatiles .....	<u>81.6</u>	
	100.0	100.0

(G) 5529-a

Trademark Registered