

DIRECTIONS FOR USE

10-1 Pentox when reduced 10 to 1 is used on wood that when in use is subjected to attack by termites or other wood destroying organisms. It is recommended for use on roof decking, framing, etc. In general, it should be used on most wood that, when in use, does not come in contact with the ground or bad conditions of moisture or high humidity. For such conditions we recommend our regular Pentox (Water Repellent.)

Inasmuch as 10-1 Pentox does not impart any color to the wood, it is quite frequently used for treating plywood and other lumber that is to be finished natural. However, sometimes it is desirable to add coloring to the Preservative so as to give the wood a stained effect, such as the color of walnut or mahogany. If this is desired, Color in Oil can be added to obtain the desired color. 10-1 Pentox does not in any way affect the drying or performance of paint.

When 10-1 Pentox is reduced 10 parts mineral spirits to 1 part Pentox, it may be applied by brushing, or dipping. We recommend that, if possible, the material be dipped. Our normal recommendation is that the wood be submerged five minutes for each inch of thickness. No oil, varnish, or material other than mineral spirits should be added.

Wood treated with 10-1 Pentox should be allowed to dry overnight before painting.

WARNING

**HARMFUL OR FATAL IF SWALLOWED
CONTAINS PETROLEUM DISTILLATE**

If swallowed CALL A PHYSICIAN IMMEDIATELY. COMBUSTIBLE. DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME. CONTAINS PENTACHLOROPHENOL. Avoid contact with skin and breathing of vapor. Do not transfer contents to bottles or other unlabeled containers. Close container after each use. Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place. Wear rubber gloves when handling freshly treated lumber.


SF-203-A

**USE WITH ADEQUATE VENTILATION
KEEP OUT OF REACH OF CHILDREN.**

U.S.D.A. REG. NO. 9027-1

11/71

ACTIVE INGREDIENTS:	
Pentachlorophenol	38.5%
Other chlorinated phenols	4.4%
INERT INGREDIENTS	57.1%
TOTAL	100.0%

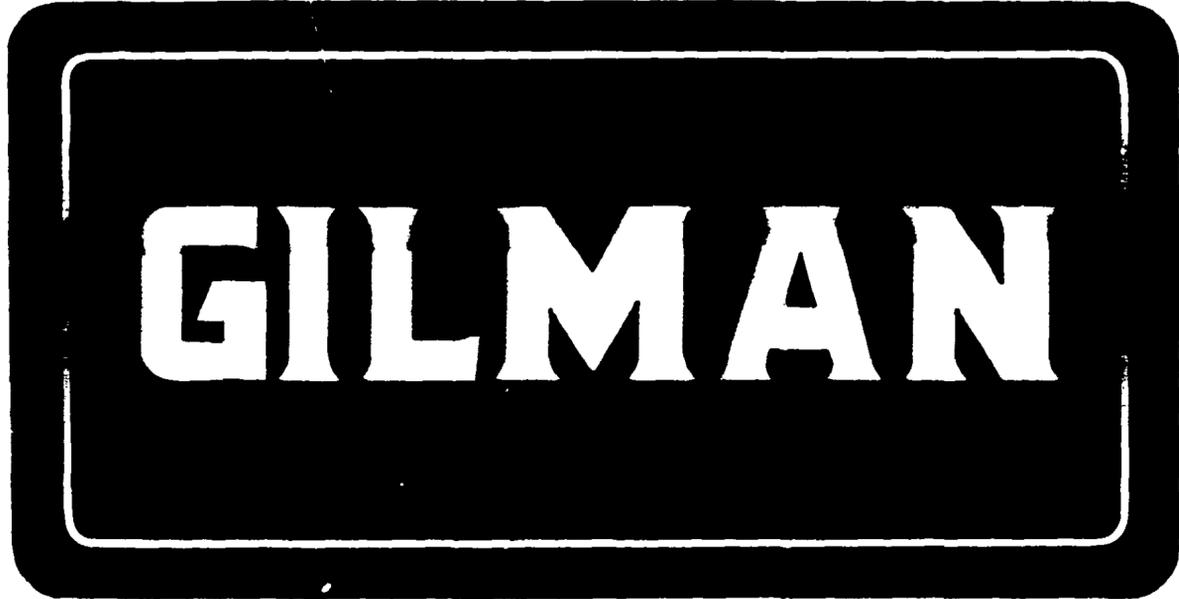

**10-1 PENTOX
WOOD PRESERVATIVE**

WARNING

**HARMFUL OR FATAL IF SWALLOWED
KEEP OUT OF REACH OF CHILDREN**

See other cautions on side panel

Concentrated

ONE GALLON

Non-Water Repellent

32-5

U.S. MEASURE

DIRECTIONS FOR USE

10-1 Pentox when reduced 10 to 1 is used on wood that when in use is subjected to attack by termites or other wood destroying organisms. It is recommended for use on roof decking, framing, etc. In general, it should be used on most wood that, when in use, does not come in contact with the ground or bad conditions of moisture or high humidity. For such conditions we recommend our regular Pentox (Water Repellent.)

Inasmuch as 10-1 Pentox does not impart any color to the wood, it is quite frequently used for treating plywood and other lumber that is to be finished natural. However, sometimes it is desirable to add coloring to the Preservative so as to give the wood a stained effect, such as the color of walnut or mahogany. If this is desired, Color in Oil can be added to obtain the desired color. 10-1 Pentox does not in any way affect the drying or performance of paint.

When 10-1 Pentox is reduced 10 parts mineral spirits to 1 part Pentox, it may be applied by brushing, or dipping. We recommend that, if possible, the material be dipped. Our normal recommendation is that the wood be submerged five minutes for each inch of thickness. No oil, varnish, or material other than mineral spirits should be added.

Wood treated with 10-1 Pentox should be allowed to dry overnight before painting.

WARNING

**HARMFUL OR FATAL IF SWALLOWED
CONTAINS PETROLEUM DISTILLATE**

If swallowed CALL A PHYSICIAN IMMEDIATELY. COMBUSTIBLE. DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME. CONTAINS PENTACHLOROPHENOL. Avoid contact with skin and breathing of vapor. Do not transfer contents to bottles or other unlabeled containers. Close container after each use. Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place. Wear rubber gloves when handling freshly treated lumber.

SF-203-A

**USE WITH ADEQUATE VENTILATION
KEEP OUT OF REACH OF CHILDREN.**

U.S.D.A. REG. NO. 9027-1

11/71

**Gilman Paint and Varnish Co.
PAINT & VARNISH MAKERS
Chattanooga, Tenn. 37402**

ACCEPTED WITH COMMENTS