


ACTIVE INGREDIENTS:
Pentachlorophenol 4.27 %
Other chlorinated phenols34 %
INERT INGREDIENTS 95.39 %
TOTAL 100.00 %

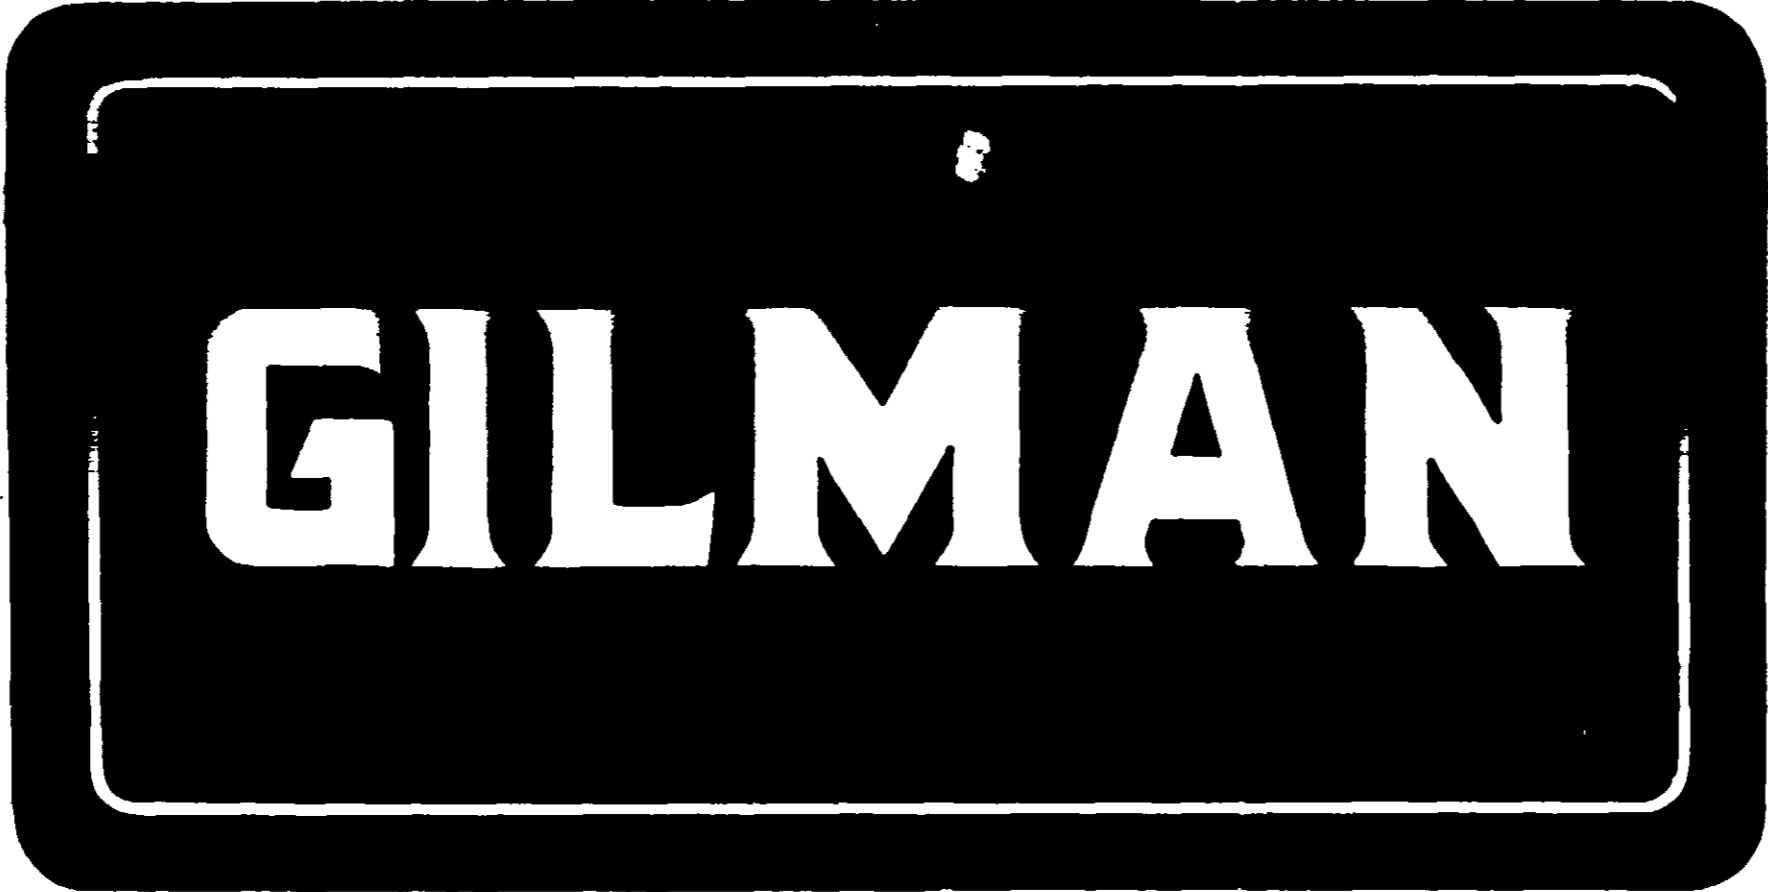

PENTOX

ACCEPTED
1-31-72
UNDER THE FEDERAL INSECTICIDE
FUNGICIDE AND RODENTICIDE ACT
AS A DOMESTIC POISON REGISTERED
EPA REG. NO. 9027-2

WOOD PRESERVATIVE

Ready to Use

Water Repellent

32-3

WARNING

HARMFUL OR FATAL IF SWALLOWED
KEEP OUT OF REACH OF CHILDREN

ONE GALLON

See other cautions on side panel

U.S. MEASURE

Gilman Paint and Varnish Co.
PAINT & VARNISH MAKERS
Chattanooga, Tenn. 37402

DIRECTIONS FOR USE

Pentox preserves and protects all types of unpainted wood surfaces and is especially recommended for steps, sash, sills, porch columns, floors, fence posts, boats, etc. Fence posts, poles, foundation timbers & heavy members should be free of bark, dry & well-seasoned & immersed in Pentox for a period of 12-48 hours to be an effective wood preserver.

Pentox is clear and does not impart color to wood. It is frequently used for treating plywood and other lumber that is to be finished natural. If a stained effect, such as walnut or mahogany is desired, color in oil can be added. Pentox does not affect the drying of paint and may be painted over in 24 hours as it contains no creosote or tar products.

Pentox may be applied freely by brush, spray or dip.

All wood which comes in contact with the ground should receive TWO flowing coats by brush, spray or be dipped for at least 5 minutes for each inch of thickness. Other surfaces require only one coat. Pentox is ready to use just as it comes in the container. Do not add oil, varnish, thinner or other material.

WARNING

**HARMFUL OR FATAL IF SWALLOWED
CONTAINS PETROLEUM DISTILLATE**

If swallowed CALL A PHYSICIAN IMMEDIATELY. COMBUSTIBLE. Keep away from heat and open flame. CONTAINS PENTACHLOROPHENOL. Avoid contact with skin and breathing of vapor. Do not transfer contents to bottle or other unlabeled containers. Close container after each use. DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME.

Close container after each use. Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place. SF-203-A

USE WITH ADEQUATE VENTILATION
KEEP OUT OF REACH OF CHILDREN.

This product is toxic to fish & wildlife. Do not contaminate water by cleaning of equipment or disposal of wastes.

U.S.C. REG. NO. 9027-2

11/71

DIRECTIONS FOR USE

Pentox preserves and protects all types of unpainted wood surfaces and is especially recommended for steps, sash, sills, porch columns, floors, fence posts, boats, etc. Fence posts, poles, foundation timbers & heavy members should be free of bark, dry & well-seasoned & immersed in Pentox for a period of 12-48 hours to be an effective wood preserver.

Pentox is clear and does not impart color to wood. It is frequently used for treating plywood and other lumber that is to be finished natural. If a stained effect, such as walnut or mahogany is desired, color in oil can be added. Pentox does not affect the drying of paint and may be painted over in 24 hours as it contains no creosote or tar products.

Pentox may be applied freely by brush, spray or dip.

All wood which comes in contact with the ground should receive TWO flowing coats by brush, spray or be dipped for at least 5 minutes for each inch of thickness. Other surfaces require only one coat. Pentox is ready to use just as it comes in the container. Do not add oil, varnish, thinner or other material.

WARNING

**HARMFUL OR FATAL IF SWALLOWED
CONTAINS PETROLEUM DISTILLATE**

If swallowed CALL A PHYSICIAN IMMEDIATELY. COMBUSTIBLE. Keep away from heat and open flame. CONTAINS PENTACHLOROPHENOL. Avoid contact with skin and breathing of vapor. Do not transfer contents to bottle or other unlabeled containers. Close container after each use. DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME.

Close container after each use. Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place. SF-203-A

USE WITH ADEQUATE VENTILATION
KEEP OUT OF REACH OF CHILDREN.

This product is toxic to fish & wildlife. Do not contaminate water by cleaning of equipment or disposal of wastes.

U.S.D.A. REG. NO. 9027-2

11/71

1-31-72

9027-2

ACCEPTED WITH COMMENTS