

"You Get the Best of It"

DIRECTIONS FOR USE

Gilman's Copper Wood Preservative preserves and protects all types of unpainted surfaces, lumber, canvas, fish nets, rope or twine. Ideal for steps, sills, porch columns, fence posts, floors, decking, framing, etc.

Gilman's Copper Wood Preservative imparts a greenish color to the wood which makes it possible to tell at a glance that the wood has been treated. A green cast may also be noted in the first or priming coat of paint. This is caused by picking up copper deposit on the surface. This is not "bleeding" and will not show in succeeding coats of paint or enamel.

Gilman's Copper Wood Preservative may be applied freely by brushing, or dipping in a tank or trough. All wood which is to be in contact with the earth should receive TWO flowing coats by brush or be dipped for at least five minutes per inch of thickness. Other wood surfaces require only one coat. Canvas, fish nets, rope or twine should be dipped or soaked until thoroughly wet.

Gilman's Copper Wood Preservative may be painted over in 24 hours as it contains no creosote or tar products.

CONTAINS PETROLEUM DISTILLATE.

DO NOT TAKE INTERNALLY

If Swallowed, Do Not Induce Vomiting. CALL A PHYSICIAN IMMEDIATELY. COMBUSTIBLE. DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME. CONTAINS COPPER NAPHTHENATE. Avoid contact with skin and breathing of vapor. Do not transfer contents to bottles or other unlabeled containers. Close container after each use. Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place. SF-204

Use with adequate ventilation. KEEP OUT OF THE REACH OF CHILDREN.

| | |
|---------------------------|--------|
| ACTIVE INGREDIENTS | |
| Copper Naphthenate | 11.5% |
| INERT INGREDIENTS | |
| Mineral Spirits | 88.5% |
| Copper as metal | 1.0% |
| | 100.0% |



COPPER WOOD PRESERVATIVE


(Ready to Use)

32-2

CAUTION

KEEP OUT OF REACH OF CHILDREN HARMFUL OR FATAL IF SWALLOWED See other cautions on side panel

U.S. MEASURE

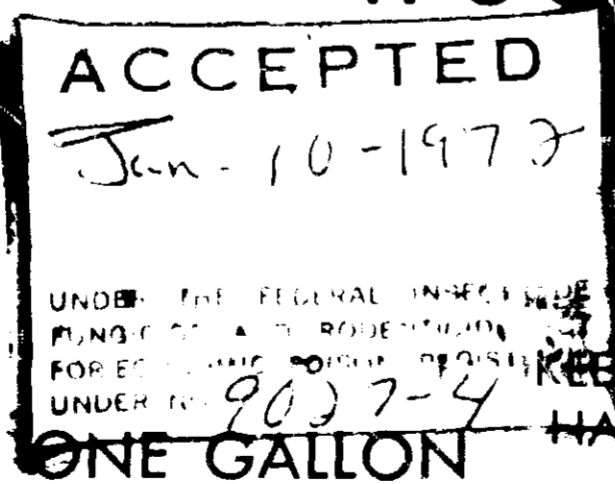

DIRECTIONS FOR USE

Gilman's Copper Wood Preservative preserves and protects all types of unpainted surfaces, lumber, canvas, fish nets, rope or twine. Ideal for steps, sills, porch columns, fence posts, floors, decking, framing, etc.

Gilman's Copper Wood Preservative imparts a greenish color to the wood which makes it possible to tell at a glance that the wood has been treated. A green cast may also be noted in the first or priming coat of paint. This is caused by picking up copper deposit on the surface. This is not "bleeding" and will not show in succeeding coats of paint or enamel.

Gilman's Copper Wood Preservative may be applied freely by brushing, or dipping in a tank or trough. All wood which is to be in contact with the earth should receive TWO flowing coats by brush or be dipped for at least five minutes per inch of thickness. Other wood surfaces require only one coat. Canvas, fish nets, rope or twine should be dipped or soaked until thoroughly wet.

Gilman's Copper Wood Preservative may be painted over in 24 hours as it contains no creosote or tar products.

CONTAINS PETROLEUM DISTILLATE.

DO NOT TAKE INTERNALLY

If Swallowed, Do Not Induce Vomiting. CALL A PHYSICIAN IMMEDIATELY. COMBUSTIBLE. DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME. CONTAINS COPPER NAPHTHENATE. Avoid contact with skin and breathing of vapor. Do not transfer contents to bottles or other unlabeled containers. Close container after each use. Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place. SF-204

Use with adequate ventilation. KEEP OUT OF THE REACH OF CHILDREN.

Gilman Paint and Varnish Co.
PAINT & VARNISH MAKERS
Chattanooga, Tenn. 37402