



D-STAIN SERVER

WOOD SURFACES


CHESTNUT
BROWN

S.D.A. Reg. No. 9284-2

FOR ANYTHING
MADE OF WOOD



DOOR JAMBS AND SILLS

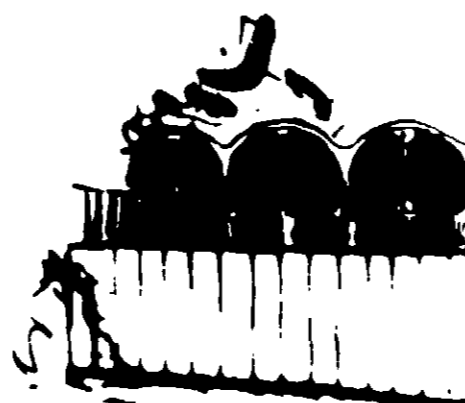

FENCES AND POSTS



WINDOW FRAMES AND SILLS

CONTAINS PENTACHLOROPHENOL

Harmful or fatal if Swallowed or Absorbed
Through the Skin. If Swallowed, Induce
Vomiting and Call a Physician Immediately

WARNING! COMBUSTIBLE

FIRE Avoid exposing the contents of this product to
treated lumber to open flame. Treat in well-ventilated areas.

SKIN During the application avoid contact with treated wood.
Wear rubber gloves and protective clothing when handling the
freshly treated lumber.

EYES If in contact with eyes flush for 15 minutes with
running water. Call a physician immediately.

BREATHING Use a mask when spraying. Do not spend
extended periods in a closed area.

HAZARDS Keep freshly treated articles away from plants,
food stuffs, and children. Do not get in eyes, on skin, or on
clothing.

ACTIVE INGREDIENTS


PENTACHLOROPHENOL	4.5%
OTHER CHLORINATED PHENOLS	0.5%
PETROLEUM SOLVENTS	74.5%
Total	79.5%

INERT INGREDIENTS

RESIN SOLIDS	6.5%
OXIDE TINTING PIGMENTS	3.4%
(Titanium Dioxide, Chrome Oxide or Iron Oxide)	
HEAT TREATED LINSEED OIL	11.6%
Total	20.5%

100.00%

This product is toxic to fish and wildlife. Do not contaminate
water by cleaning of equipment or disposal of wastes.

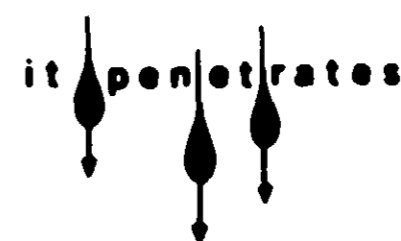

**BRUSH IT!
DIP IT!
SPRAY IT!
ROLL IT!**

WATERLOX CHEMICAL & COATINGS CORP

WOOD ROT

SEE PANEL FOR ADDITIONAL WARNINGS.

IF SWALLOWED, KEEP OUT OF REACH OF CHILDREN.

CHLORINATED PHENOLS 0.50%, PETROLEUM SOLVENTS 74.50%, INERT INGREDIENTS 20.50%


ON U. S. MEASURE




PATIO - FURNITURE



ROUGH CUT SIDING

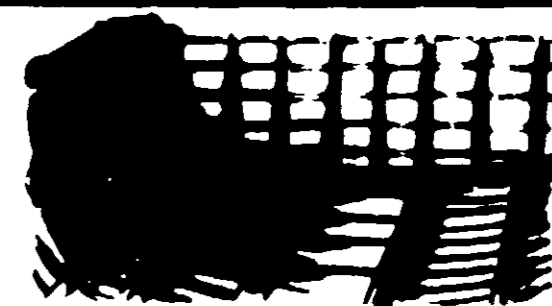

BOAT BILGE

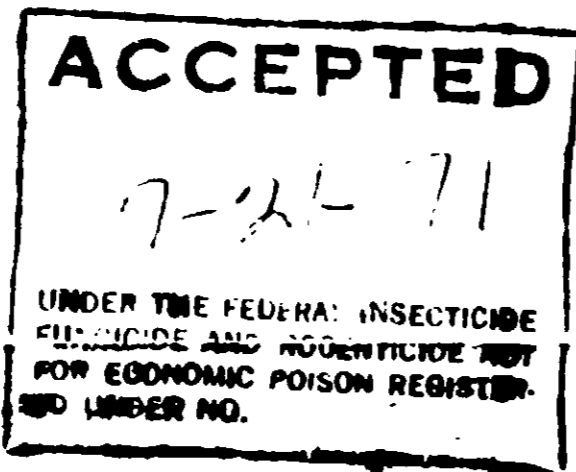

FOR ALL WOOD SURFACES
**WOOD-STAIN
PRESERVER**

Wood must be — BARE, CLEAN AND DRY
Stir Thoroughly Before Using.

Lumber in contact with the soil should be dipped for three minutes minimum. For maximum protection, poles, fence posts and foundation timbers should be immersed in WOOD-STAIN PRESERVER for a maximum of 12 to 48 hours.

O.K. under varnish, shellac, paint and Waterlox products.

Apply one or two flowing coats of WOOD-STAIN PRESERVER by brush or spray to attain the depth of color desired.

If a gloss finish is desired, wait a minimum of two days before applying a finish coat. See your Waterlox dealer for specific instructions.

Clean-up — mineral spirits and paint thinner
Average coverage 150 sq. ft.



**WOOD-S
PRESER**

FOR ALL WOOD S

**WILLOW
GREEN**

U.S.D.A. Reg. No. 9284-5



**SLOWS SHRINKING
AND SWELLING**



**CONTROLS DECAY AND ROT
REDUCES SPLITTING**



LESSENS WARPING

PREVENTS WO

SEE BACK PANEL FOR ADDITIONAL

DANGER: HARMFUL OR FATAL IF SWALLOWED. KEEP

ACTIVE INGREDIENTS 79.50%, PENTACHLOROPHENOL 4.50%, OTHER CHLORINATED PHENOLS

1 GALLON U. S. MEAS