

7-21-71  
UNDER THE INSECTIONS  
Pesticide and Insecticide  
FOR ECONOMIC POISON RESISTANCE  
ED UNDER NO.

FOR ALL WOOD SURFACES

# WOOD-STAIN PRESERVER

Wood must be — BARE, CLEAN AND DRY  
Stir Thoroughly Before Using.

Lumber in contact with the soil should be dipped for three minutes minimum. For maximum protection, poles, fence posts and foundation timbers should be immersed in WOOD-STAIN PRESERVER for a maximum of 12 to 48 hours.

O.K. under varnish, shellac, paint and Waterlox products.

Apply one or two flowing coats of WOOD-STAIN PRESERVER by brush or spray to attain the depth of color desired.

If a gloss finish is desired, wait a minimum of two days before applying a finish coat. See your Waterlox dealer for specific instructions.

Clean-up — mineral spirits and paint thinner.  
Average coverage 150 sq. ft.



# WOOD-STAIN PRESERVER

FOR ALL WOOD SURFACES

**TEAKWOOD GRAY**

U.S.D.A. Reg. No. 9284-3



**SLOWS SHRINKING AND SWELLING**



**CONTROLS DECAY AND ROT  
REDUCES SPLITTING**



**LESSENS WARPING**

## PREVENTS WOOD ROT

SEE BACK PANEL FOR ADDITIONAL

**DANGER: HARMFUL OR FATAL IF SWALLOWED. KEEP OUT OF REACH OF CHILDREN.**

ACTIVE INGREDIENTS 79.50%, PENTACHLOROPHENOL 4.50%, OTHER CHLORINATED PHENOLS 15.00%

**1 GALLON U. S. MEAS**

# WOOD-STAIN SERVER


WOOD SURFACES

TEAKWOOD  
GRAY

U.S.D.A. Reg. No. 9284-3



DOOR JAMBS AND SILLS

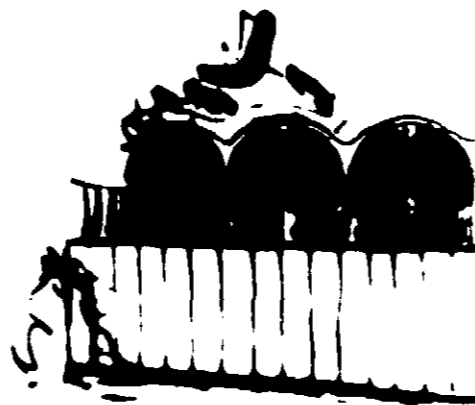

FENCES AND POSTS



WINDOW FRAMES AND SILLS

**SKIN** During the application avoid contact with the skin. Wear rubber gloves and protective clothing when handling the freshly treated lumber.

**EYES** If in contact with eyes, flush for 15 minutes with running water. Call a physician immediately.

**BREATHING** Use a mask when spraying. Do not spray for extended periods in a closed area.

**HAZARDS** Keep freshly treated articles away from plants, food stuffs, and children. Do not get in eyes, on skin, or on clothing.

<b>ACTIVE INGREDIENTS</b>		79.50%
PENTACHLOROPHENOL	4.50%	
OTHER CHLORINATED PHENOLS	0.50%	
PETROLEUM SOLVENTS	74.50%	
Total	79.50%	
<b>INERT INGREDIENTS</b>		20.50%
RESIN SOLIDS	6.50%	
OXIDE TINTING PIGMENTS (Titanium Dioxide, Chrome Oxide or Iron Oxide)	4.40%	
HEAT TREATED LINSEED OIL	9.60%	
Total	20.50%	
		<b>100.00%</b>

This product is toxic to fish and wildlife. Do not contaminate water by cleaning of equipment or disposal of wastes.



**BRUSH IT!  
DIP IT!  
SPRAY IT!  
ROLL IT!**

WATERLOX CHEMICAL & COATINGS CORP.

## PREVENTS WOOD ROT

SEE BACK PANEL FOR ADDITIONAL WARNINGS.

**TOXIC IF SWALLOWED. KEEP OUT OF REACH OF CHILDREN.**

OTHER CHLORINATED PHENOLS 0.50%, PETROLEUM SOLVENTS 74.50%, INERT INGREDIENTS 20.50%


**ALL VOLUMES FOLLOW U. S. MEASURE**



PATIO - FURNITURE



ROUGH CUT SIDING

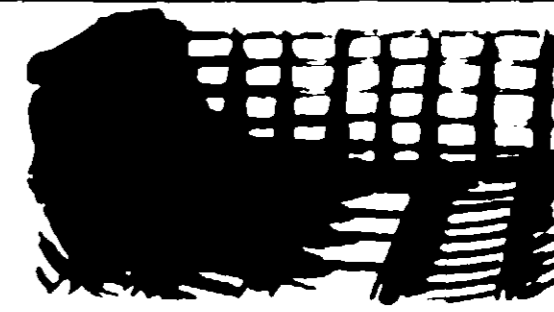

BOAT BILGE