

VERMICIDE AND FUNGICIDE
FOR ECONOMIC CONTROL OF
WOOD-BORING INSECTS
REGISTERED UNDER NO. 13844

FOR ALL WOOD SURFACES WOOD-STAIN PRESERVER

Wood must be — BARE, CLEAN AND DRY
Stir Thoroughly Before Using.

Lumber in contact with the soil should be dipped for three minutes minimum. For maximum protection, poles, fence posts and foundation timbers should be immersed in WOOD-STAIN PRESERVER for a maximum of 12 to 48 hours.

O.K. under varnish, shellac, paint and Waterlox products.

Apply one or two flowing coats of WOOD-STAIN PRESERVER by brush or spray to attain the depth of color desired.

If a gloss finish is desired, wait a minimum of two days before applying a finish coat. See your Waterlox dealer for specific instructions.

Clean-up — mineral spirits and paint thinner.
Average coverage 150 sq. ft.



WOOD-STAIN PRESERVER

FOR ALL WOOD SURFACES

**PERSIMMON
BROWN**

U.S.D.A. Reg. No. 9284-4



**SLOWS SHRINKING
AND SWELLING**



**CONTROLS DECAY AND ROT
REDUCES SPLITTING**



LESSENS WARPING

PREVENTS WOOD ROT

SEE BACK PANEL FOR ADDITIONAL

DANGER: HARMFUL OR FATAL IF SWALLOWED. KEEP

ACTIVE INGREDIENTS 79.50%, PENTACHLOROPHENOL 4.50%, OTHER CHLORINATED PHENOLS (

1 GALLON U. S. MEAS

ATERLOX

WOOD-STAIN SEMPER PERVER

WOOD SURFACES


**SIMMON
BROWN**

Reg. No. 9284-4


**FOR ANYTHING
MADE OF WOOD**



DOOR JAMBS AND SILLS

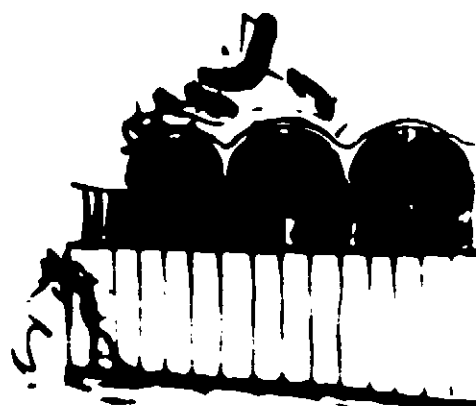

FENCES AND POSTS

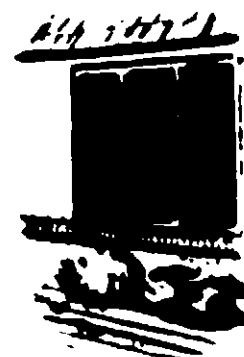

WINDOW FRAMES AND SILLS

CONTAINS FENTACHLOROPHENOL

Harmful or fatal if Swallowed or Absorbed Through the Skin. If Swallowed, Induce Vomiting and Call a Physician Immediately

WARNING! COMBUSTIBLE

FIRE Avoid exposing the contents of this can or the freshly treated lumber to open flame. Treat in well ventilated areas.

SKIN During the application avoid contact with the skin. Wear rubber gloves and protective clothing when handling the freshly treated lumber.

EYES If in contact with eyes, flush for 15 minutes with running water. Call a physician immediately.

BREATHING Use a mask when spraying. Do not spray for extended periods in a closed area.


HAZARDS Keep freshly treated articles away from plants, food stuffs, and children. Do not get in eyes, on skin, or on clothing.

ACTIVE INGREDIENTS	79.50%
PENTACHLOROPHENOL	4.50%
OTHER CHLORINATED PHENOLS	0.50%
PETROLEUM SOLVENTS	74.50%
Total	79.50%

INERT INGREDIENTS	20.50%
RESIN SOLIDS	6.50%
OXIDE TINTING PIGMENTS (Titanium Dioxide, Chrome Oxide or Iron Oxide)	4.40%
HEAT TREATED LINSEED OIL	9.60%
Total	20.50%

100.00%

This product is toxic to fish and wildlife. Do not contaminate water by cleaning of equipment or disposal of wastes.

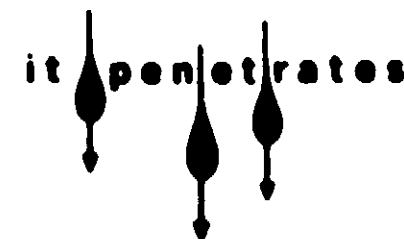

**BRUSH IT!
DIP IT!
SPRAY IT!
ROLL IT!**

ATERLOX CHEMICAL & COATINGS CORP.

WOOD ROT

FOR ADDITIONAL WARNINGS.

ALLOWED. KEEP OUT OF REACH OF CHILDREN.

CHLORINATED PHENOLS 0.50%, PETROLEUM SOLVENTS 74.50%, INERT INGREDIENTS 20.50%


U. S. MEASURE



PATIO - FURNITURE



ROUGH CUT SIDING

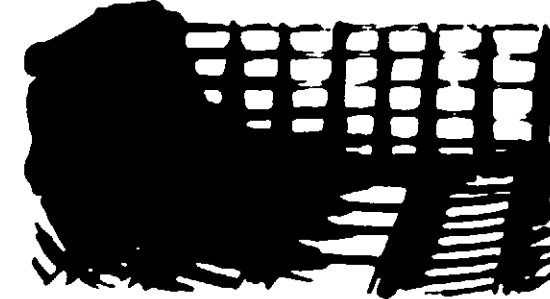

BOAT BILGE