

1 of 1 9284-9

PRECAUTIONARY STATEMENTS

WARNING: COMBUSTIBLE MIXTURE

HAZARDS TO HUMANS AND DOMESTIC ANIMALS



WARNING: Causes eye damage and skin irritation. Do not get in eyes, on skin, or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful if swallowed or absorbed through skin. Avoid breathing vapors or mist. This product may cause skin sensitization.

STATEMENT OF PRACTICAL TREATMENT: *In case of skin contact, wash promptly and thoroughly with soap and water. If product gets in eyes, flush immediately with copious amounts of clean, cool water for 15 to 20 minutes. Get medical attention immediately. If product is swallowed, do not induce vomiting. Call a physician.*

ENVIRONMENTAL HAZARDS: This pesticide is toxic to fish and wildlife. Do not apply directly to water. Do not contaminate water by cleaning equipment or disposal of waste.

PHYSICAL AND CHEMICAL HAZARDS: To avoid spontaneous combustion, soak oily rags in water after use, or place in closed metal container away from buildings and other combustible materials.

COMBUSTIBLE: Do not use or store near heat or open flame.

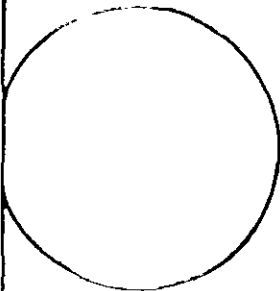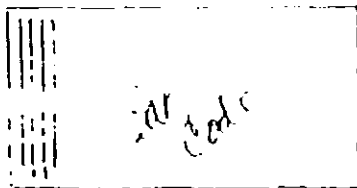

A WATERLOX
TUNG OIL PRODUCT

STOPS STAINING
HALTS MILDEW
REPELS WATER

ACCEPTED
JAN 3 1986
Under the Federal Insecticide-
Fungicide, and Rodenticide Act
as amended, for the pesticide
registered under
EPA Reg. No. 9284-9

PAINTABLE

WOOD

PRE

PENETRA

MOIST

USE ON

STORAGE AND DISPOSAL

Do not use or store inside the home. Do not reuse empty container. Wrap container and put it in trash collection. Keep away from feed and food. Do not transfer contents to other containers for storage.



SLOWS SHRINKING
AND SWELLING

PRE

'KE

WARNING! CON

SEE BA

1 G

RESIST STAIN RESIST ROT RESIST WEATHER RESIST INSECTS

**TO GUARD AGAINST
ROT AND WEATHER
DAMAGE TO GROUND WOOD**

Copy has been proof read
and layout checked.

O K as is.
 O K as corrected.
 Submit new proof.

Signed _____

**MOP IT
BRUSH IT
ROLL IT
SOAK IT**

**IT IS A VIOLATION OF
TO USE THIS PRODUCT
IS INCONSISTENT WITH**

Use on exterior, above-ground wood
rot, mildew, staining, and
used on hulls, arbors and green
plants.

All surfaces in contact with floor
sealed after treatment. Use varnish, a
Site preserver thoroughly before use.

All wood should be clean, dry and
sever. Use one or more coats to saturate
grain ends and sides completely and
likewise to start in these areas. If dip method
exposure is recommended. Wait 4
varnishing over the surface.

Average first coat coverage is 150
higher coverage on subsequent applications.

Clean up with mineral spirits or paint
remover.

LIMITED WARRANTY: If proved to
of purchase we will replace the material
price at Waterlox's option. Manufacturer
Include labor, any loss, or consequential
damages.

ACTIVE INGREDIENTS	
Methylene bis (Chloroacetate)	0.2%
2-(Chloromethylthio) benzothiazole	0.2%
INERT INGREDIENTS	99.6%
TOTAL	100.0%

**KEEP AWAY FROM
ITS WOOD ROT**

REACH OF CHILDREN.

**IS EXTREMELY
E. HARMFUL OR FATAL IF SWALLOWED.**

SEE ADDITIONAL PRECAUTIONARY STATEMENTS.

U.S. MEASURE (3.78 LITERS)



**IT PENETRATES
WATER DOESN'T**

WATERLOX® CHEMICAL & CO.

CLEVELAND, OHIO 44102

EPA Reg. No.

EPA EST.