

Reg # 9339-19

PM-31

193

US ENVIRONMENTAL PROTECTION AGENCY OFFICE OF PESTICIDES PROGRAMS REGISTRATION DIVISION (75-767) WASHINGTON, DC 20460	EPA REGISTRATION NO. 9339-19	DATE OF ISSUANCE
	TERM OF ISSUANCE MAY 4 1991	
	NAME OF PESTICIDE PRODUCT Flexibar 11XI Water Based Copper Paint	

NOTICE OF PESTICIDE: REGISTRATION
 REREGISTRATION
 (Under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended)

NAME AND ADDRESS OF REGISTRANT (Include ZIP code)

Flexibar
 145 Walnut Street
 Northvale, NJ 07647

NOTE: Changes in labeling formula differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above U.S. EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby Registered/Reregistered under the Federal Insecticide, Fungicide, and Rodenticide Act.

A copy of the labeling accepted in connection with this Registration/Reregistration is returned herewith.

Registration is in no way to be construed as an indorsement or approval of this product by this Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with FIFRA section 3(c)(7)(C) provided that you:

1. Submit all data or other material required for registration/reregistration of your product under FIFRA section 3(c)(7)(C) or FIFRA section 4 when the Agency requires all registrants of similar products to submit such data.

2. Submit a new Confidential Statement of Formula with the correct product name listed, i.e., Flexibar 11XI Water Based Copper Paint. Change in the product name in the label word "Paint" to "Preservative" so that it will agree with the name in the Confidential Statement of Formula.

BEST AVAILABLE COPY

ATTACHMENT IS APPLICABLE 62742: I/C: CR-31: Dutch: L31-11: KEVRIC: 06/11/91: 07/10/91: CL: wo: ek

SIGNATURE OF APPROVING OFFICIAL	DATE
---------------------------------	------

- c. In the Statement of Practical Treatment, If Swallowed, revise to read as follows:

If Swallowed: Drink promptly a large quantity of water. Do not induce vomiting. Call a physician immediately.

- d. Remove the Physical or Chemical Hazards heading or place a statement under the heading.

3. Submit five (5) copies of your final printed labeling before you release the product for shipment. Refer to the A-79 enclosure for a further description of final printed labeling.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA section 6(e). Your release for shipment of the product constitutes acceptance of these conditions.


A stamped copy of the label is enclosed for your records.

Should you have any further questions, please contact Veronica Dutch at (703) 557-7404.



John H. Lee
 Product Manager (31)
 Antimicrobial Program Branch
 Registration Division (H7505C)

Enclosures

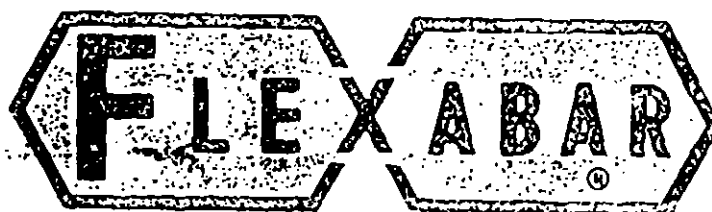

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS
(& DOMESTIC ANIMALS)**

• WARNING •

CAUSES EYE IRRITATION. Harmful if absorbed through skin. Avoid contact with skin, eyes, or clothing. Wear protective clothing such as gloves, long sleeved cotton shirt, long pants and hat. May be fatal if swallowed or inhaled. Do not breathe vapor or spray mist while spraying paint or sanding boat surface. Wear a mask or respirator jointly approved by The Mining Enforcement and Safety Administration and The National Institute of Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

ENVIRONMENTAL HAZARDS

This Material is Toxic to Fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

PHYSICAL or CHEMICAL HAZARDS

DIRECTIONS FOR USE

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING

STORAGE AND DISPOSAL

STORAGE
Do not contaminate water, food or feed by storage or disposal. Open dipping is prohibited. Store in cool, dry area away from heat or open flame.

PESTICIDE DISPOSAL
Pesticide spray mixture or rinse water that cannot be used according to label instruction must be disposed of according to applicable federal, state or local procedures.

CONTAINER DISPOSAL
Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other approved state and local procedures.

ACCEPTED
with COMMENTS
in EPA Letter Dated:

**FLEXGARD XII
WATERBASE**

PAINTABLE

Copper Paint

Under the Federal Insecticide, Fungicide, and Rodenticide Act, Registration No. 9339-19

ACTIVE INGREDIENT:

Cuprous oxide 25.26%
INERT INGREDIENTS: 74.74%
(Copper as metallic 22.86%)

TOTAL 100.00%

KEEP OUT OF REACH OF CHILDREN

WARNING:

STATEMENT OF PRACTICAL TREATMENT

If swallowed: CALL A PHYSICIAN IMMEDIATELY
DO NOT induce vomiting
If on skin: Wash thoroughly with soap and water
If in eyes: Flush immediately with plenty of water for 15 minutes and get medical attention.
If inhaled: Remove to fresh air

SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

Net Contents

EPA Reg. No. 9339-
EPA Est. No. 9339 NJ01

DIRECTIONS FOR COMMERCIAL USE

This is a cuprous oxide pigment especially to prevent the attachment of animal fouling on vessels immersed in "brackish" water.

Coating requires no primer when applied to glass or wood. For optimum performance, a primer is recommended. The theoretical coverage is 400 square feet per gallon. The recommended dry film thickness is .0015 inches.

To prepare the surface for coating, remove all dirt, scale, and fouling residue by either washing with water, scraping or by disc sanding. Wear proper protective equipment to avoid ingestion of the paint dust generated during sanding.

A clean, dry surface, free of scale, corrosion, marine fouling, or other foreign matter is essential for optimum performance of this coating. For complete coating or for touch-up, the surface must be free of any residue. If the residue will result in unsatisfactory performance, remove all dust, debris and other material that are generated by the cleaning process.

Mix the coating with either a high speed shaker for a minimum of five (5) minutes or by hand for a minimum of four (4) hours before application. Thin if too thick to apply easily. This coating is not intended for use on surfaces that will be cleaned with water when dry.

Apply by either brush, roller, or spray. Follow instructions and apply the coating in a minimum of four (4) hours between coats. Wait four (4) hours before recoating.

Manufactured By

FLEXABAR CORPORATION
140 Walnut Street, Northvale, New Jersey 07647 201 760-5570