

NOTICE OF PESTICIDE:

REGISTRATION
 REREGISTRATION

(Under the Federal Insecticide, Fungicide,
and Rodenticide Act, as amended)

NAME OF PESTICIDE PRODUCT

Flexabar Copper Paint

NAME AND ADDRESS OF REGISTRANT (Include ZIP code)

Flexabar
190 Walnut Street
Northvale, NJ 07647

NOTE: Changes in labeling formula differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above U.S. EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby Registered/Reregistered under the Federal Insecticide, Fungicide, and Rodenticide Act.

A copy of the labeling accepted in connection with this Registration/Reregistration is returned herewith.

Registration is in no way to be construed as an indorsement or approval of this product by this Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with FIFRA section 3(c)(7)(B) provided that you:

1. Submit/cede all data or other material required for registration/reregistration of your product under FIFRA section 3(c)(5) or FIFRA section 4 when the agency requires all registrants of similar products to submit such data.

2. Place the labeling changes listed below on the product before you release the product for shipment:

a. Add the phrase "EPA Registration No. 1339-10."

b. Under the Statement of Practical Treatment, If Swallowed, rephrase to read as follows:

If Swallowed: Drink promptly a large quantity of water. Avoid alcohol. Get medical attention.

3. Submit five (5) copies of your final printed labeling before you release the product for shipment. Refer to the A-79 enclosure for a further description of final printed labeling.

BEST AVAILABLE COPY

ATTACHMENT IS APPLICABLE

SIGNATURE OF APPROVING OFFICIAL

DATE

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA section 6(e). Your release for shipment of the product constitutes acceptance of these conditions.

A stamped copy of the label is enclosed for your records.


Should you have any further questions, please contact Veronica Dutch at (703) 557-7404.

John H. Lee
Product Manager (31)
Antimicrobial Program Branch
Registration Division (H7505C)

Enclosures

BEST AVAILABLE COPY

383

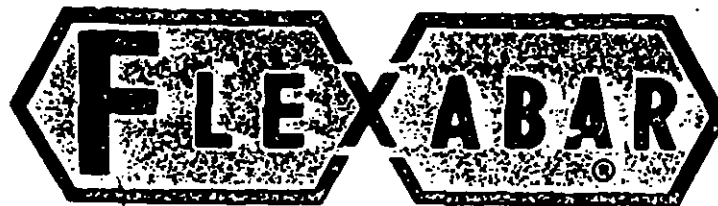

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS
(& DOMESTIC ANIMALS)**

• WARNING •

CAUSES EYE IRRITATION. Harmful if absorbed through skin. Avoid contact with skin, eyes, or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants and hat. May be fatal if swallowed or inhaled. Do not breathe vapor or spray mist while spraying paint or sanding boat surface. Wear a mask or respirator jointly approved by The Mining Enforcement and Safety Administration and The National Institute of Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

ENVIRONMENTAL HAZARDS

This Material is Toxic to Fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

PHYSICAL or CHEMICAL HAZARDS

Do not use or store near heat or open flame.

DIRECTIONS FOR USE

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING.

STORAGE AND DISPOSAL

STORAGE

Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited. Store in cool, dry area away from heat or open flame.

PESTICIDE DISPOSAL

Pesticide spray mixture or rinse water that cannot be used according to label instruction must be disposed of according to applicable Federal, state or local procedures.

CONTAINER DISPOSAL

Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other approved state and local procedures.

**FLEXGARD X
Copper Paint**

ACTIVE INGREDIENT:

Cuprous oxide 24.7%

INERT INGREDIENTS: 75.3%

(Copper as metallic 21.9%)

TOTAL 100.00%

"This Product Contains petroleum Distillates"

Keep Out of Reach of Children

• WARNING •

STATEMENT OF PRACTICAL TREATMENT

IF SWALLOWED: Drink promptly a large quantity of milk, egg whites, gelatin solution or if these are not available, drink large quantities of water. Avoid Alcohol. Get Medical Attention.

IF INHALED: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get Medical Attention.

IF ON SKIN: Wash with plenty of soap and water. Get Medical Attention.

IF IN EYES: Flush with plenty of water. Get Medical Attention.

SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

ACCEPTED
with COMMENTS

In EPA Letter Dated:

Net Contents APR 20 1991

EPA Reg. No. 9339

EPA Est. No. 9339 NJ01

Under the Federal Insecticide,
Fungicide, and Rodenticide Act as
amended, for this pesticide
registered and Manufactured By

9339-80
FLEXABAR CORPORATION

140 Walnut Street, Northvale, New Jersey 07647 201-768-5570

BEST AVAILABLE

DIR
FOR CO

This is a cuprous especially to prevent animal fouling on "brackish" water.

When used over coating is required coating requires n glass or wood. For recommended. Th at least 400 square recommended dry

To prepare the su and fouling residu water, scraping o p,oper protective ingestion of the pa

A clean dry surface marine fouling, or optimum performa complete coating o ration will result in remove all dust, d that are generated

Mix the coating w shaker for a minim pigment reincorpor is too thick to ap kerosene. Clean u

Apply by either b mixing instructions minimum of four (4 two (2) hours before