



# ALKEN V-8

## FOR CONTROL OF BACTERIA AND ALGAE IN INDUSTRIAL WATER COOLING TOWERS

ACTIVE INGREDIENT  
2,2-Dibromo-3-nitro  
INERT INGREDIENTS

KEEP OUT OF REACH OF CHILDREN  
**DA** **NGER**

**PRECAUTIONS**  
Hazards to Humans  
CAUSES SEVERE BURNS  
MAY BURN THE EYES OR FAT  
Do Not Get in Eyes  
Wear Short-Sleeved

**WASH THOROUGHLY**  
Statement

**FIRST AID:** In case of contact with skin, wash with plenty of water for at least 15 minutes. In case of contact with eyes, flush with plenty of water. Wash thoroughly. If swallowed, induce vomiting by giving 1-2 glasses of water. Repeat until vomit is clear. Do not give anything by mouth to

See Left Panel for Other Precautionary Statements

See Right Panel for Directions for Use

## BACTERIA AND ALGAE IN INDUSTRIAL WATER COOLING TOWERS

### STATEMENTS

Alkaline  
Toxic  
May be Harmful to Aquatic Life  
Keep out of reach of children  
Do not breathe dust or fumes


### AFTER HANDLING

#### First Aid Treatment

If on skin, wash with plenty of water for at least 15 minutes. If in eyes, flush with plenty of water for at least 15 minutes. If swallowed, induce vomiting by giving 1-2 glasses of water. Repeat until vomit is clear. Do not give anything by mouth to

tant

for Use

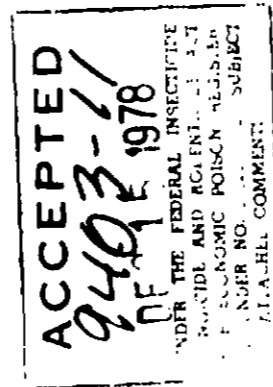

## DIRECTIONS FOR USE GENERAL CLASSIFICATION

It is a violation of federal law to use this product in a manner inconsistent with its labeling.

**NOTE:** ADD ALKEN V-8 SEPARATELY TO THE SYSTEM WITH OTHER ADDITIVES, IN ORDER TO AVOID DECOMPOSITION DUE TO THE HIGH pH OF MANY ADDITIVES.

### INDUSTRIAL RECIRCULATING WATER COOLING TOWERS

Add ALKEN V-8 to the basin for any other treatment. Should be made initially or within 24 hours of start-up, intermittent, depending on the severity of the problem. No longer than 10 days. The extent of time in the system. Other treatments may be used if the product is not effective. If other treatments are used, the product should be used.

### FOR CONTROL OF BACTERIA

Add 0.0019 (0.019 gal) ALKEN V-8 per gallon of water in the basin on the severity of contamination.

**Intermittent or Slug Method.**  
**Initial Dose:** When the system is first started, add ALKEN V-8 1.000 gal of water per gallon of water.  
**Subsequent Dose:** When the system is first started, add ALKEN V-8 1.000 gal of water per gallon of water to maintain control.

**Continuous Feed Method.**

**Initial Dose:** When the system is first started, add ALKEN V-8 1.000 gal of water per gallon of water.  
**Subsequent Dose:** Maintain a concentration of 0.0019 to 0.0096 gal ALKEN V-8 per gallon of water. Badly fouled systems must be cleaned.

### FOR CONTROL OF ALGAE

Add 0.048 (0.190 gal) ALKEN V-8 per gallon of water in the basin on the severity of contamination.

**Intermittent or Slug Method.**  
**Initial Dose:** When the system is first started, add ALKEN V-8 1.000 gal of water per gallon of water.  
**Subsequent Dose:** When the system is first started, add ALKEN V-8 1.000 gal of water per gallon of water. Badly fouled systems must be cleaned.

**Continuous Feed Method.**

**Initial Dose:** When the system is first started, add ALKEN V-8 1.000 gal of water per gallon of water.  
**Subsequent Dose:** Maintain a concentration of 0.048 to 0.190 gal ALKEN V-8 per gallon of water. Badly fouled systems must be cleaned.

### STORAGE AND DISPOSAL

Keep container tightly closed. Do not store in a cool, dry, approved landfill area.

**NOTICE:** Seller warrants that the product is suitable and reasonably fit for the purpose intended. Seller does not warrant or assume any liability for any damage or loss, nor any other warranty of MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE, EXPRESS OR IMPLIED, ARISING OUT OF OR TO LIBEL OR TRADING, or under any other law, statute, regulation, or reasonably foreseeable to seller, and buyer assumes all risk of