PRECAUTIONARY STATEMENTS

DANGER

ENVIRONMENTAL HAZARDS:

This product is toxic to fish. Do not contaminate water by [illegible] of equipment, or disposal of wastes. Apply this product only as specified on this label.

PHYSICAL AND CHEMICAL HAZARDS:

TO MAINTAIN PRODUCT QUALITY,
STORE AT TEMPERATURES BELOW 60 C.
KEEP CONTAINER TIGHTLY CLOSED WHEN NOT IN USE
FOR INDUSTRIAL USE ONLY

In [illegible] emergency endangering life or property involving this product, call collect

(212) 777-6560

manufactured by

ALKEN-MURRAY CORPORATION
111 FIFTH AVENUE
NEW YORK, NEW YORK 10003

EPA REG. NO. [illegible]03-12 EPA EST. NO. 09403-OH-01

NET CONTENTS KG LB.

ACCEPTED
9403
DEC 15 1978
UNDER THE FEDERAL INSECTICIDE FUNGICIDE AND RODENTICIDE ACT FOR ECONOMIC POISON REGISTERED UNDER NO. _____ SUBJECT TO ATTACHED COMMENTS.

ALKEN V-9

FOR CONTROL OF BACTERIA AND ALGAE IN INDUSTRIAL RECIRCULATING WATER COOLING TOWERS

ACTIVE INGREDIENT:	
2,2-Dibromo-3-nitrilopropionamide	5%
INERT INGREDIENTS:	95%

KEEP OUT OF REACH OF CHILDREN

DANGER

PRECAUTIONARY STATEMENTS

Hazards to Humans and Domestic Animals

CAUSES SEVERE BURNS OF EYES

MAY BURN THE SKIN • MAY BE HARMFUL OR FATAL IF SWALLOWED

Do Not Get in Eyes, on Skin, or on Clothing
Wear Chemical Workers' Goggles when Handling

WASH THOROUGHLY AFTER HANDLING

Statement of Practical Treatment

FIRST AID: In case of eye contact, flush eyes immediately with plenty of water for at least 15 minutes and get medical attention. In case of skin contact, wash with soap and plenty of water. Wash contaminated clothing before reuse.

If swallowed, induce vomiting by sticking finger down the throat or by giving soapy or strong salty water to drink. Repeat until vomit is clear. Call a physician. Never give anything by mouth to an unconscious person.

See Left Panel for Other Important Precautionary Statements

See Right Panel for Directions for Use

DIRECTIONS FOR U

GENERAL CLASSIFICAT

It is a violation of federal law to use th manner inconsistent with its la

NOTE: ADD ALKEN V-9 SEPARATELY TO THE SYS OTHER ADDITIVES, IN ORDER TO AVOID DECO DUE TO THE HIGH pH OF MANY ADDITIVE FORM

INDUSTRIAL RECIRCULATING WATER

Add ALKEN V-9 to the basin (or any other point o should be made manually or with a [illegible] pum intermittent, depending on the severity of [illegible] con is begun and the retention time in the system [illegible] this product is attained by continuous [illegible] treatment is used, the blowdown [illegible]

FOR CONTROL OF BACT

Add 0.0[illegible]38 gal. ALKEN V-9 [illegible] ing on the severity of contamination.

Intermittent or Slug Method.

Initial Dose: When the system [illegible] ALKEN V-9 1,000 gal. of water [illegible]

Subsequent Dose: When [illegible] ALKEN V-9 1,000 gal. [illegible]

maintain control

Badly fouled systems must be cleaned before treat

Continuous Feed Method.

Initial Dose: When the system [illegible] ALKEN V-9 1,000 gal. of water [illegible]

Subsequent Dose: Maintain this [illegible] pump [illegible] gal. ALKEN V-9 1,000 gal. [illegible]

Badly fouled systems must be cleaned before treat

FOR CONTROL OF AL

Add [illegible] ALKEN V-9 1,000 gal. of water in the [illegible] contamination.

Intermittent or Slug Method.

Initial Dose: When the system [illegible] ALKEN V-9 1,000 gal. of water [illegible]

Subsequent Dose: When [illegible] V-9 [illegible] of water [illegible] system daily [illegible]

Badly fouled systems must be cleaned before treat

Continuous Feed Method.

Initial Dose: When the system [illegible] ALKEN V-9 1,000 gal. of water [illegible]

Subsequent Dose: Maintain this treatment level by [illegible] of 0.116 [illegible]380 gal. ALKEN V-9 1,000 gal. of water

Badly fouled systems must be cleaned before treat

STORAGE AND DISPO

Keep container tightly closed. Destroy [illegible] approved landfill area.

NOTICE: [illegible] warrants that the product conforms and [illegible] fit for the purposes stated on the [illegible] under normal conditions of us nor any other warranty of MERCHANTABILITY or LAR PURPOSE, express or implied, extends to the [illegible] under abnormal condition [illegible] and buyer assume

ALKEN V-9

FOR CONTROL OF BACTERIA AND ALGAE IN INDUSTRIAL RECIRCULATING WATER COOLING TOWERS

ACTIVE INGREDIENT:	
2,2-Dibromo-3-nitrilopropionamide	5%
INERT INGREDIENTS:	95%

KEEP OUT OF REACH OF CHILDREN

DANGER

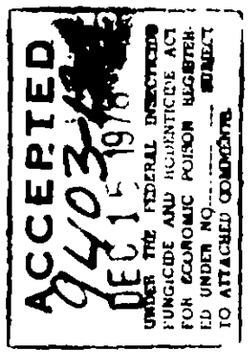

PRECAUTIONARY STATEMENTS

Hazards to Humans and Domestic Animals

CAUSES SEVERE BURNS OF EYES

MAY BURN THE SKIN • MAY BE HARMFUL OR FATAL IF SWALLOWED

Do Not Get in Eyes, on Skin, or on Clothing
Wear Chemical Worker's Goggles when Handling

WASH THOROUGHLY AFTER HANDLING

Statement of Practical Treatment

FIRST AID: In case of eye contact, flush eyes immediately with plenty of water for at least 15 minutes and call a doctor for attention. In case of skin contact, wash with soap and plenty of water. Wash contaminated clothing before reuse.

If swallowed, induce vomiting by tickling back of throat or by giving syrup of ipecac. Keep victim warm. Repeat until vomit is clear. Call a physician. Never give anything by mouth to an unconscious person.

See Left Panel for Other Important Precautionary Statements

See Right Panel for Directions for Use

DIRECTIONS FOR USE

GENERAL CLASSIFICATION

It is a violation of federal law to use this product in a manner inconsistent with its labeling.

NOTE: ADD ALKEN V-9 SEPARATELY TO THE SYSTEM. DO NOT MIX IT WITH OTHER ADDITIVES, IN ORDER TO AVOID DECOMPOSITION OF ALKEN V-9 DUE TO THE HIGH pH OF MANY ADDITIVE FORMULATIONS.

INDUSTRIAL RECIRCULATING WATER COOLING TOWERS

Add ALKEN V-9 to the basin (or any other point of uniform distribution) should be made manually or with a metering pump, intermittent, depending on the severity of the contamination is begun, and the retention time in the system. Optimum this product is attained by continuous or intermittent treatment is used, the blowdown should be adjusted

FOR CONTROL OF BACTERIA

Add 0.0038-0.038 gal. ALKEN V-9 [illegible] ing on the severity of contamination.

Intermittent or Slug Method.

Initial Dose: When the system [illegible] ALKEN V-9 1,000 gal. of water in the system.

Subsequent Dose: When microbiological [illegible] ALKEN V-9 1,000 gal. of water in the system to maintain control.

Badly fouled systems must be cleaned before treatment.

Continuous Feed Method.

Initial Dose: When the system is started [illegible] ALKEN V-9 1,000 gal. of water in the system.

Subsequent Dose: Maintain [illegible] 0.0019-0.019 gal. ALKEN V-9 [illegible]

Badly fouled systems must be cleaned before treatment.

FOR CONTROL OF ALGAE

Add 0.116-0.380 ALKEN V-9 [illegible] the severity of contamination.

Intermittent or Slug Method

Initial Dose: When the system [illegible] ALKEN V-9 1,000 gal. of water in the system.

Subsequent Dose: When [illegible] ALKEN V-9 1,000 gal. of water in the system.

Badly fouled systems must be cleaned before treatment.

Continuous Feed Method.

Initial Dose: When the system is started [illegible] ALKEN V-9 1,000 gal. of water in the system.

Subsequent Dose: Maintain the treatment [illegible] of 0.116-0.380 gal. ALKEN V-9 [illegible]

Badly fouled systems must be cleaned before treatment.

STORAGE AND DISPOSAL

Keep container tightly closed. Dispose [illegible] approved landfill area.

NOTICE: Seller warrants that the product conforms [illegible] and is reasonably fit for the purposes stated [illegible] ance with directions under normal [illegible] nor any other warranty of MERCHANTABILITY [illegible] LAR PURPOSE, express or implied, extends [illegible] to label instructions, or under abnormal [illegible] reasonably foreseeable to seller, and buyer assumes [illegible]