

**8010-290-8698**

**PAIN ANTIFOULING COLD PLASTIC SHIPBOTTOM BLACK  
SPEC MIL-P-19449A (SHIPS) NAVY FORMULA No. 146/50**


**5 GAL A/A MFG 11/65**

**WT 64 NET WT 59 CF .9**

**ATLAS PAINT & VARNISH CO.**

**IRVINGTON, N.J.**

**P.O.**

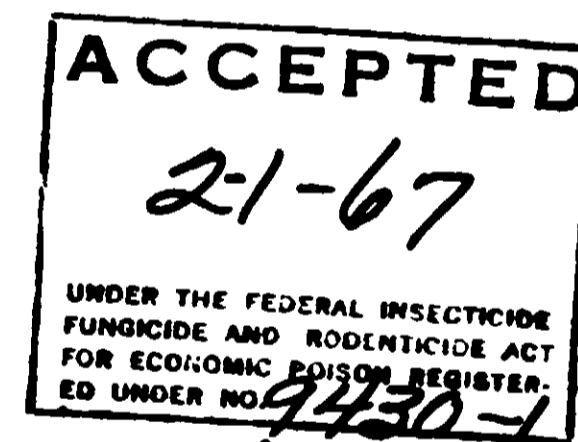

*Comman*

**ACTIVE INGREDIENTS**

Cuprous Oxide ..... 28.4%  
Solvent Naphtha(Xyld) .. 22.3%  
Mercuric Oxide..... 3.7%

**INERT INGREDIENTS** . 45.6%

100.0%

2



**WARNING!**

**TOXIC and  
FIRE HAZARD.**

**CONTAINS**

PETROLUM THINNER OF 100°F. MIN.  
FLASH POINT - ~~MERCURIC~~ OXIDE, AND  
COPPER OR COPPER OXIDE.

MAY BE FATAL IF SWALLOWED. DO  
NOT BREATHE SPRAY MIST. DO NOT  
GET IN EYES, ON SKIN, OR ON  
CLOTHING. WASH THOROUGHLY  
AFTER HANDLING. AVOID SPARKS,  
OPEN FLAME, AND SPILLS.

KEEP CONTAINER CLOSED.

KEEP OUT OF REACH OF CHILDREN.

**ACCEPTED**

2-1-67.

UNDER THE FEDERAL INSECTICIDE  
FUNGICIDE AND RODENTICIDE ACT  
FOR ECONOMIC PEST CONTROL REGISTERED  
UNDER NO. 9430-1

*Comments*

**DIRECTIONS:** Contents may be applied by hot spray (temperature not to exceed 120°F), airless spray, or regular cold spray. (Normally no thinning required.) Where thinning is necessary, use Methyl Isobutyl Ketone.

USE ACCORDING TO MIL-P-19449A. DISPOSE OF EMPTY CONTAINERS BY COVERING WITH MINIMUM OF ONE FOOT OF SOIL. IMMEDIATELY COVER ALL SPILLAGES WITH SOIL.

ACCEPTED WITH COMMENTS