

9436-4

08-18-2011

1/21



U.S. ENVIRONMENTAL PROTECTION AGENCY  
 Office of Pesticide Programs  
 Antimicrobials Division (7510P)  
 1200 Pennsylvania Avenue NW  
 Washington, D.C. 20460

EPA Reg. Number:  
 9436-4

Date of Issuance:  
 AUG 18 2011

Term of Issuance:

Conditional

Name of Pesticide Product:

Sodium Hypochlorite 12.5%

NOTICE OF PESTICIDE:

- Registration
- Reregistration

(under FIFRA, as amended)

Name and Address of Registrant (include ZIP Code):

**FILE COPY**

Brenntag Northeast, Inc.  
 81 West Huller Lane  
 Reading, PA 19605

Note: Changes in labeling differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby registered/reregistered under the Federal Insecticide, Fungicide and Rodenticide Act. Registration is in no way to be construed as an endorsement or recommendation of this product by the Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product (OPP Decision No. D-448760) is registered in accordance with FIFRA sec 3(c)(7)(A) provided that you:

1. Submit and/or cite all data required for registration of your product under FIFRA sec. 3(c)(5) when the Agency requires all registrants of similar products to submit such data; and submit acceptable responses required for re-registration of your product under FIFRA section 4.
2. Make the labeling changes listed below before you release the product for shipment:
  - a. Revise the "EPA File Symbol to read, EPA Reg. No. 9436-4"

Signature of Approving Official:

Date:

AUG 18 2011

Monisha Harris  
 Product Manager Team (32)  
 Regulatory Management Branch II  
 Antimicrobials Division (7510P)

Page 1 of 2

- b. The CAS # information has been removed from the label.
- c. Revise the "Hazards to Human and Domestic Animals" as follows:

**DANGER.** Corrosive. May cause severe skin irritation or chemical burns to broken skin. Causes eye damage. Maybe fatal if swallowed. Do not get in eyes on skin or clothing. Wear goggles or face shield and rubber gloves when handling this product. Avoid breathing vapors. Vacate poorly ventilated areas as soon as possible. Do not return until odors have dissipated. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, using tobacco or using the toilet. Remove and wash contaminated clothing before reuse.

- d. Revise the First Aid statements as follows:

If in Eyes:

Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing. Call a poison control center or doctor for treatment advice.

If on skin:

Take off contaminated clothing.  
Rinse skin immediately with plenty of water for 15-20 minutes.  
Call a poison control center or doctor for treatment advice.

If swallowed:

Call a poison control center or doctor immediately for treatment advice.  
Have person sip a glass of water if able to swallow.  
Do not induce vomiting unless told to by a poison control center or doctor.  
Do not give anything to an unconscious person.

If inhaled:

Move person to fresh air. If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible.  
Call a poison control center or doctor for further treatment advice.

Note to Physician: "Probable mucosal damage may contraindicate the use of gastric lavage."

- Have the product container or label with you when calling a poison control center or doctor or going for treatment.
- For emergency information on [product, use, etc.], call the **National Pesticides Information Center** at 1-800-858-7378, 6:30 AM to 4:30 PM Pacific time (PT), seven days a week. During other times, call the poison control center 1-800-222-1222.

- e. Revise the Ingredient statement as follows:

Active Ingredient:	
Sodium Hypochlorite .....	12.5%
Other Ingredients.....	<u>87.5%</u>
Total.....	100.0%
(Provides XX% Available Chlorine)	

f. Update the Container Handling section per PR Notice 2007-4 under the Storage and Disposal Section.

g. Change "Physition" to "Physician" under the First Aid section.


3. Submit three (1) copy of your final printed labeling before distributing or selling the product bearing the revised labeling.

4. Submit a one year Storage Stability and a one year Corrosion Characteristics study.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA sec. 6(e). Your release for shipment of the product constitutes acceptance of these conditions.

A stamped copy of the label accepted with conditions is enclosed for your records. Should you have any questions regarding this letter, please contact Wanda Henson by phone at (703) 308-6345 or via email at [Henson.Wanda@epa.gov](mailto:Henson.Wanda@epa.gov).

Sincerely,

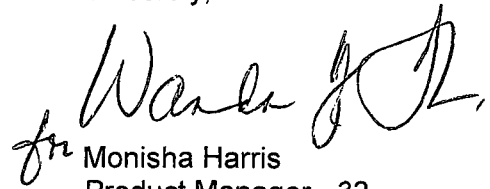

for Monisha Harris  
Product Manager - 32  
Regulatory Management Branch II  
Antimicrobials Division (7510P)

Enclosures: (Stamped Label)

# SODIUM HYPOCHLORITE 12.5%

## Active Ingredient:

Sodium Hypochlorite ..... 12.5%  
Other Ingredients..... 87.5%  
Total..... 100.0%

ACCEPTED  
with COMMENTS  
in EPA Letter Dated:

AUG 18 2011

Under the Federal Insecticide,  
Fungicide, and Rodenticide Act as  
amended, for the pesticide,  
registered under EPA Reg. No. 9436-4

EPA REG. NO. 9436-4    EPA EST. NO. 9436-PA-1

**BRENTAG**

(610) 926 - 4151  
BRENTAG NORTHEAST, INC.  
RT 61 & HULLER LANE  
READING, PA 19603

**MIS RATINGS: HEALTH: 2 FLAMMABILITY: 0 REACTIVITY: 3 SPECIAL:**

ADDITIONAL INFORMATION: FOR CHEMICAL EMERGENCY, CALL CHEMTREC  
800-424-9300.

SEE MATERIAL SAFETY DATA SHEET # 472916

**DOT: HYPOCHLORITE SOLUTIONS 8 11N1701 PG III RD**

214

# SODIUM HYPOCHLORITE 12.5%

LABEL REV 04/05/11

**DANGER! EXTREMELY FLAMMABLE LIQUID.**  
KEEP OUT OF REACH OF CHILDREN

## FIRST AID:

**EYES:** HOLD EYE OPEN AND RINSE WITH WATER FOR 15 MINUTES. REMOVE CONTACT LENSES. GET PROMPT MEDICAL ATTENTION. IF ON SKIN OR CLOTHING: TAKE OFF CLOTHING. RINSE SKIN WITH WATER FOR 15 MINUTES. SEEK MEDICAL ATTENTION. IF INHALED: MOVE PERSON TO FRESH AIR. IF NOT BREATHING, CALL 911. THEN GIVE ARTIFICIAL RESPIRATION GET MEDICAL ATTENTION. IF SWALLOWED: DRINK LARGE AMOUNTS OF WATER. DO NOT INDUCE VOMITING. GET MEDICAL ATTENTION IMMEDIATELY. NOTE TO PHYSICIAN: PROBABLE MUCOSAL DAMAGE MAY CONTRAINDICATE THE USE OF GASTRIC LAVAGE.

**CORROSIVE:** MAY CAUSE SEVERE SKIN IRRITATION OR CHEMICAL BURNS TO BROKEN SKIN. CAUSES EYE DAMAGE. MAY BE FATAL IF SWALLOWED. DO NOT GET INTO EYES, OR SKIN OR CLOTHING. WEAR GOGGLES OR FACE SHIELD AND RUBBER GLOVES WHEN HANDLING THIS PRODUCT. WASH AFTER HANDLING. AVOID BREATHING VAPORS. VACATE POORLY VENTILATED AREAS AS SOON AS POSSIBLE. DO NOT RETURN UNTIL ODORS HAVE DISSIPATED.

## ENVIRONMENTAL HAZARDS:

THIS PESTICIDE IS TOXIC TO FISH AND AQUATIC ORGANISMS. DO NOT DISCHARGE EFFLUENT CONTAINING THIS PRODUCT INTO LAKES, STREAMS, PONDS, ESTUARIES, OCEANS, OR WATER UNLESS THIS PRODUCT IS SPECIFICALLY IDENTIFIED AND ADDRESSED IN A NPDES PERMIT. DO NOT DISCHARGE EFFLUENT CONTAINING THIS PRODUCT TO SEWER SYSTEMS WITHOUT NOTIFYING SEWAGE TREATMENT AUTHORITY. FOR GUIDANCE CONTACT YOUR STATE WATER BOARD OR REGIONAL OF EPA PHYSICAL AND CHEMICAL HAZARDS:

**STRONG OXIDIZING AGENT:** MIX ONLY WITH WATER ACCORDING TO LABEL DIRECTIONS. MIXING THIS PRODUCT WITH GROSS FILTH SUCH AS FECS, URINE, ETC., OR AMMONIA, ACIDS, DETERGENTS, OR OTHER CHEMICALS WILL RELEASE HAZARDOUS GASES IRRITATING TO THE EYES, LUNGS, AND MUCOUS MEMBRANES.

## STORAGE AND DISPOSAL:

STORE IN COOL, DRY AREA AWAY FROM DIRECT SUNLIGHT. IN CASE OF SPILL, FLOOD AREA WITH LARGE QUANTITIES OF WATER. RINSE EMPTY CONTAINER THOROUGHLY WITH WATER AND EITHER RETURN TO MANUFACTURER OR DISCARD BY PLACING IN TRASH COLLECTION OR BURYING IN AN APPROVED LANDFILL. PRODUCT OR RINSEATE THAT CANNOT BE USED SHOULD BE DILUTED WITH WATER AND DISPOSED OF IN A SANITARY SEWER. DO NOT CONTAMINATE FOOD OR FEED BY STORAGE, DISPOSAL OR CLEANING EQUIPMENT.

## NOTE:

PRODUCT DEGRADES WITH AGE. USE A CHLORINE TEST KIT AND INCREASE DOSAGE AS NECESSARY TO OBTAIN THE DESIRED LEVEL OF AVAILABLE CHLORINE.

## DIRECTIONS FOR USE - GENERAL CLASSIFICATION:

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING

**CIRCULAR NUMBER 10:** SANITIZERS OF HARD NONPOROUS SURFACES (STEELESS STEEL TOPS)

**CIRCULAR NUMBER 20:** SANITIZERS OF COMMERCIAL LAUNDRY

**CIRCULAR NUMBER 30:** AGENTS TO WASH OR ASSIST IN LYE PEELING OF FRUITS AND VEGETABLES (SODIUM HYPOCHLORITE ONLY). AGENTS TO HELP CONTROL MICROORGANISMS ON MUSHROOMS (PINS), POTATOES, SWEET POTATOES. AGENTS TO HELP CONTROL MICROORGANISMS ON EGGS FOR HUMAN CONSUMPTION

**CIRCULAR NUMBER 40:** DISINFECTANTS OF HUMAN DRINKING WATER (EMERGENCY/PUBLIC & INDIVIDUAL) AND HUMAN DRINKING WATER SYSTEMS (WATER MAINS)

**CIRCULAR NUMBER 50:** DISINFECTANTS OF HARD NONPOROUS SURFACES (SEALED TILE AND FIBERGLASS, GLASS, STAINLESS STEEL)

**CIRCULAR NUMBER 60:** AGENTS TO HELP CONTROL MICROORGANISMS IN SEWAGE, WASTE WATER, INDUSTRIAL AND PULP AND PAPER PROCESS WATER SYSTEMS

**CIRCULAR NUMBER 70:** ALGICIDES, SLURICIDES IN COOLING TOWERS OR EVAPORATIVE CONDENSORS

**CIRCULAR NUMBER 80:** SANITIZERS OF POROUS FOOD CONTACT SURFACES (WOODEN BUTCHER BLOCKS)

**CIRCULAR NUMBER 90:** SANITIZERS OF POROUS NON-FOOD CONTACT SURFACES (TILE WALLS, CONCRETE FLOORS)

**CIRCULAR NUMBER 100:** DISINFECTANTS OF SWIMMING POOL WATER, SPAS/HOT TUBS, HYDROTHERAPY POOLS

5/12

# BRENTAG NORTHEAST

## Application Circular Number 10

### **SANITIZATION OF HARD NONPOROUS SURFACES**

#### *DIRECTIONS FOR USE*

##### **RINSE METHOD**

A solution of 100 ppm available chlorine may be used in the sanitizing solution if a chlorine test kit is available. Solutions containing an initial concentration of 100 ppm available chlorine must be tested and adjusted periodically to insure that the available chlorine does not drop below 50 ppm. Prepare a sanitizing solution of approximately 100 ppm by thoroughly mixing 1 oz. of this product with 10 gallons of water. If no test kit is available, prepare a sanitizing solution by thoroughly mixing 2 oz. of this product with 10 gallons of water to provide approximately 200 ppm available chlorine by weight.

Clean equipment surfaces in the normal manner. Prior to use, rinse all surfaces thoroughly with the sanitizing solution, maintaining contact with the sanitizer for at least 2 minutes. If solution contains less than 50 ppm available chlorine, as determined by a suitable test kit, either discard the solution or add sufficient product to reestablish a 200 ppm residual. Do not rinse equipment with water after treatment and do not soak equipment overnight.

Sanitizers used in automated systems may be used for general cleaning but may not be reused for sanitizing purposes.

##### **IMMERSION METHOD**

A solution of 100 ppm available chlorine may be used in the sanitizing solution if a chlorine test kit is available. Solutions containing an initial concentration of 100 ppm available chlorine must be tested and adjusted periodically to insure that the available chlorine does not drop below 50 ppm. Prepare a sanitizing solution of approximately 100 ppm by thoroughly mixing 1 oz. of this product with 10 gallons of water. If no test kit is available, prepare a sanitizing solution by thoroughly mixing 2 oz. of this product with 10 gallons of water to provide approximately 200 ppm available chlorine by weight. Clean equipment in the normal manner. Prior to use, immerse equipment in the sanitizing solution for at least 2 minutes and allow the sanitizer to drain. If solution contains less than 50 ppm available chlorine, as determined by a suitable test kit, either discard the solution or add sufficient product to reestablish a 200 ppm residual. Do not rinse equipment with water after treatment. Sanitizers used in automated systems may be used for general cleaning but may not be reused for sanitizing purposes.

##### **FLOW/PRESSURE METHOD**

Disassemble equipment and thoroughly clean after use. Assemble equipment in operating

position prior to use. Prepare a volume of approximately 200 ppm available chlorine sanitizing solution equal to 110% of volume capacity of the equipment by mixing the product in a ratio of 2 oz. product with 10 gallons of water. Pump solution through the system until full flow is obtained at all extremities, the system is completely filled

with the sanitizer and all air is removed from the system. Close drain valves and hold under pressure for at least 2 minutes to insure contact with all internal surfaces. Remove some cleaning solution from drain valve and test with a chlorine test kit. Repeat entire cleaning/sanitizing process if effluent contains less than 50 ppm available chlorine.

**CLEAN-IN-PLACE METHOD**

Thoroughly clean equipment after use. Prepare a sanitizing solution of approximately 200 ppm available chlorine equal to 110% of volume capacity of the equipment by mixing the product in a ratio of 2 oz. product with 10 gallons of water. Pump solution through the system until full flow is obtained at all extremities, the system is completely filled with the sanitizer and all air is removed from the system. Close drain valves and hold under pressure for at least 10 minutes to insure contact with all internal surfaces. Remove some cleaning solution from drain valve and test with a chlorine test kit. Repeat entire cleaning/sanitizing process if effluent contains less than 50 ppm available chlorine. Rinse system with potable water prior to use.

**SPRAY/FOG METHOD**

Pre-clean all surfaces prior to use of the product. Use a 200 ppm available chlorine solution to control bacteria, mold or fungi and a 600 ppm solution to control bacteriophage. Prepare a sanitizing solution of approximately 200 ppm of sufficient size by thoroughly mixing the product in a ratio of 2 oz. product with 10 gallons of water. Prepare a sanitizing solution of approximately 600 ppm by thoroughly mixing the product in a ratio of 6 oz. product with 10 gallons water. Use spray/fogging equipment which can resist hypochlorite solutions. Always empty and rinse spray/fog equipment with potable water after use. Thoroughly spray or fog all surfaces until wet, allowing excess sanitizer to drain. Vacate area for at least 2 hours. Prior to using equipment, rinse all surfaces treated with a 600 ppm solution with a 200 ppm solution.

**SANITIZATION OF NONPOROUS NON-FOOD CONTACT SURFACES**

**RINSE METHOD**

Prepare a sanitizing solution by thoroughly mixing 2 oz. of this product with 10 gallons of water to provide approximately 200 ppm available chlorine by weight. Clean equipment surfaces in the normal manner. Prior to use, rinse all surfaces thoroughly with the sanitizing solution, maintaining contact with the sanitizer for at least 2 minutes. Rinse equipment with water after treatment and do not soak equipment overnight.

**IMMERSION METHOD**

Prepare a sanitizing solution by thoroughly mixing, in an immersion tank, 2 oz. of this product with 10 gallons of water to provide approximately 200 ppm available chlorine by weight. Clean equipment in the normal manner. Prior to use, immerse equipment in the sanitizing solution for at least 2 minutes and allow the sanitizer to drain. Do not rinse equipment with water after treatment.

**SPRAY/FOG METHOD**

Pre-clean all surfaces after use. Prepare a sanitizing solution of approximately 200 ppm available chlorine of sufficient size by thoroughly mixing the product in a ratio of 2 oz. of product with 10 gallons of water. Use spray or fogging equipment which can resist hypochlorite solutions. Prior to using equipment, thoroughly spray or fog all surfaces until wet, allowing excess sanitizer to drain. Vacate area for at least 2 hours.

## BRENNTAG NORTHEAST

### Application Circular Number 20

# COMMERCIAL LAUNDRY SANITIZERS

#### *DIRECTIONS FOR USE*

Wet fabrics or clothes should be spun dry prior to sanitization. Thoroughly mix 2 oz. of this product with 10 gallons of water to yield approximately 200 ppm available chlorine. Promptly after mixing the sanitizer, add the solution into the pre-wash prior to washing fabrics/clothes in the regular wash cycle with a good detergent. Test the level of available chlorine if solution has been allowed to stand. Add more of this product if the available chlorine has dropped below 200 ppm.



## BRENNTAG NORTHEAST

### Application Circular Number 30

# AGRICULTURAL USES

#### *DIRECTIONS FOR USE*

##### POST HARVEST PROTECTION

Potatoes can be sanitized after cleaning and prior to storage by spraying with a sanitizing solution at a level of 1 gallon of sanitizing solution per ton of potatoes. Thoroughly mix 1 oz. of this product to 2 gallons of water to obtain approximately 500 ppm available chlorine.

##### FOOD EGG SANITIZATION

Thoroughly clean all eggs. Thoroughly mix 2 oz. of this product with 10 gallons of warm water to produce a solution containing approximately 200 ppm available chlorine solution. The sanitizer temperature should not exceed 130°F. Spray the warm sanitizer so that the eggs are thoroughly wetted. Allow the eggs to thoroughly dry before casing or breaking. Do not apply a potable water rinse. The solution should not be reused to sanitize eggs.

##### FRUIT & VEGETABLE WASHING

Thoroughly clean all fruits and vegetables in a wash tank. Thoroughly mix 5 oz. of this product in 200 gallons of water to make a sanitizing solution of approximately 25 ppm available chlorine. After draining the tank, submerge fruit or vegetables for 2 minutes in a second wash tank containing the recirculating sanitizing solution. Spray rinse vegetables with the sanitizing solution prior to packaging. Rinse fruit with potable water only prior to packaging.

# BRENNTAG NORTHEAST

## Application Circular Number 40

### **DISINFECTION OF DRINKING WATER (EMERGENCY/PUBLIC/INDIVIDUAL SYSTEMS)**

#### *DIRECTIONS FOR USE*

#### **PUBLIC SYSTEMS**

Mix a ratio of 1 oz. of this product to 100 gallons of water. Begin feeding this solution with a hypochlorinator until a free available chlorine residual of at least 0.2 ppm and no more than 0.6 ppm is attained throughout the distribution system. Check water frequently with a chlorine test kit.

Bacteriological sampling must be conducted at a frequency no less than that prescribed by the National Interim Primary Drinking Water Regulations. Contact your local Health Department for further details.

#### **INDIVIDUAL SYSTEMS: DUG WELLS**

Upon completion of the casing (lining) wash the interior of the casing (lining) with a solution containing approximately 100 ppm available chlorine using a stiff brush. This solution can be made by thoroughly mixing 1 oz. of this product into 10 gallons of water. After covering the well, pour the sanitizing solution into the well through both the pipe sleeve opening and the pipeline.

Wash the exterior of the pump cylinder also with the sanitizing solution. Start pump and pump water until strong odor of chlorine in water is noted. Stop pump and wait at least 24 hours. After 24 hours flush well until all traces of chlorine have been removed from the water. Consult your local Health Department for further details.

#### **INDIVIDUAL WATER SYSTEMS: DRILLED, DRIVEN & BORED WELLS**

Run pump until water is as free from turbidity as possible. Pour a sanitizing solution containing approximately 100 ppm available chlorine solution into the well. This solution can be made by thoroughly mixing 1 oz. of this product into 10 gallons of water. Add 5 to 10 gallons of clean, chlorinated water to the well in order to force sanitizer into the rock formation. Wash the exterior of pump cylinder with the sanitizer.

Drop pipeline into well, start pump and pump water until strong odor of chlorine in water is noted. Stop pump and wait at least 24 hours. After 24 hours flush well until all traces of chlorine have been removed from the water. Deep wells with high water levels may necessitate the use of special methods for introduction of the sanitizer to the well. Consult your local Health Department for further details.

#### **INDIVIDUAL WATER SYSTEMS: FLOWING ARTESIAN WELLS**

Artesian wells generally do not require disinfection. If analyses indicate persistent contamination, the well should be disinfected. Consult your local Health Department for further details.

#### **EMERGENCY DISINFECTION**

When boiling of water for 1 minute is not practical, water can be made potable by using this product. Prior to addition of the sanitizer, remove all suspended material

by filtration or by allowing it to settle to the bottom. Decant the clarified, contaminated water to a clean container and add 1 drop of this product to 20 gallons of water. Allow the treated water to stand for 30 minutes. Properly treated water should have a slight chlorine odor, if not, repeat dosage and allow the water to stand an additional 15 minutes. The treated water can then be made palatable by pouring it between clean containers several times.

**PUBLIC WATER SYSTEMS**

**RESERVOIRS - ALGAE CONTROL**

Hypochlorinate streams feeding the reservoir. Suitable feeding points should be selected on each stream at least 50 yards upstream from the points of entry to the reservoir.

**MAINS**

Thoroughly flush section to be sanitized by discharging from hydrants. Permit a water flow of at least 2.5 feet per minute to continue under pressure while injecting this product by means of a hypochlorinator. Stop water flow when a chlorine residual test of 50 ppm is obtained at the low pressure end of the new main section after a 24 hour retention time. When chlorination is completed, the system must be flushed free of all heavily chlorinated water.

**NEW TANKS. BASINS. ETC.**

Remove any physical soil from surface. Place 20 oz. of this product for each 5 cubic feet of working capacity (approximately 500 ppm available chlorine). Fill to working capacity and allow to stand for at least 4 hours. Drain and flush with potable water and return to surface.

**NEW FILTER SAND**

Apply 80 oz. of this product for each 150 to 200 cubic feet of sand. The action of the product dissolving as the water passes through the bed will aid in sanitizing the new sand.

**NEW WELLS**

Flush the casing with a 50 ppm available chlorine solution of water containing 5 oz. of this product for each 100 gallons of water. The solution should be pumped or fed by gravity into the well after thorough mixing with agitation. The well should stand for several hours or overnight under chlorination. It may then be pumped until a representative raw water sample is obtained. Bacterial examination of the water will indicate whether further treatment is necessary.

**EXISTING EQUIPMENT**

Remove equipment from service, thoroughly clean surfaces of all physical soil. Sanitize by placing 21 oz. of this product for each 5 cubic feet capacity (approximately 500 ppm available chlorine). Fill to working capacity and let stand at least 4 hours. Drain and place in service. If the previous treatment is not practical, surfaces may be sprayed with a solution containing 5 oz. of this product for each 5 gallons of water (approximately 1000 ppm available chlorine). After drying, flush with water and return to service.

**EMERGENCY DISINFECTION AFTER FLOODS**

**WELLS**

Thoroughly flush contaminated casing with a solution containing approximately 500 ppm available chlorine. Prepare this solution by mixing 5 oz. of this product with 10 gallons of water. Backwash the well to increase yield and reduce turbidity, adding

sufficient chlorinating solution to the backwash to produce a 10 ppm available chlorine residual, as determined by a chlorine test kit. After the turbidity has been reduced and the casing has been treated, add sufficient chlorinating solution to produce a 50 ppm available chlorine residual. Agitate the well water for several hours and take a representative water sample. Retreat well if water samples are biologically unacceptable.

**RESERVOIRS**

In case of contamination by overflowing streams, establish hypochlorinating stations upstream of the reservoir. Chlorinate the inlet water until the entire reservoir obtains a 0.2 ppm available chlorine residual as determined by a suitable chlorine test kit. In case of contamination from surface drainage, apply sufficient product directly to the reservoir to obtain a 0.2 ppm available chlorine residual in all parts of the reservoir.

**BASINS, TANKS, FLUMES, ETC. 1'**

Thoroughly clean all equipment then apply 20 oz. of product per 5 cubic feet of water to obtain 500 ppm available chlorine, as determined by a suitable test kit. After 24 hours drain, flush, and return to service. If the previous method is not suitable, spray or flush the equipment with a solution containing 5 oz. of this product for each 5 gallons of water (approximately 1000 ppm, available chlorine). Allow to stand for 2 to 4 hours, flush and return to service. •

**FILTERS**

When the sand filter needs replacement, apply 80 oz. of this product for each 150 to 200 cubic feet of sand. When the filter is severely contaminated, additional product should be distributed over the surface at the rate of 80 oz. per 20 square feet. Water should stand at a depth of 1 foot above the surface of the filter bed for 4 to 24 hours. When filter beds can be backwashed of mud and silt, apply 80 oz. of this product per each 50 sq. ft., allowing the water to stand at a depth of 1 foot above the filter sand. After 30 minutes, drain water to the level of the filter. After 4 to 6 hours, drain and proceed with normal backwashing.

**DISTRIBUTION SYSTEM**

Flush repaired or replaced section with water. Establish a hypochlorinating station and apply sufficient product until a consistent available chlorine residual of at least 10 ppm remains after a 24 hour retention time. Use a chlorine test kit.

**EMERGENCY DISINFECTION AFTER FIRES**

**CROSS CONNECTIONS OR EMERGENCY CONNECTIONS**

Hypochlorination or gravity feed equipment should be set up near the intake of the untreated water supply. Apply sufficient product to give a chlorine residual of at least 0.1 to 0.2 ppm at the point where the untreated supply enters the regular distribution system. Use a chlorine test kit.

**EMERGENCY DISINFECTION AFTER DROUGHTS**

**SUPPLEMENTARY WATER SUPPLIES**

Gravity or mechanical hypochlorite feeders should be set up on a supplementary line to dose the water to a minimum chlorine residual of 0.2 ppm after a 20 minute contact time. Use a chlorine test kit.

**WATER SHIPPED IN BY TANKS, TANK CARS, TRUCKS, ETC.**

Thoroughly clean all containers and equipment. Spray a solution containing approximately 500 ppm available chlorine and rinse with potable water after 5 minutes. This solution is made by mixing 5 oz. of this product for each 10 gallons of

water. During the filling of the containers, dose with sufficient amounts of this product to provide at least a 0.2 ppm chlorine residual. Use a chlorine test kit.

**EMERGENCY DISINFECTION AFTER MAIN BREAKS**

**MAINS**

Before assembly of the repaired section, flush out mud and soil. Permit a water flow of at least 2.5 feet per minute to continue under pressure while injecting this product by means of a hypochlorinator. Stop water flow when a chlorine residual test of 50 ppm is obtained at the low pressure end of the new main section after a 24 hour retention time. When chlorination is completed, the system must be flushed free of all heavily chlorinated water.

## BRENNTAG NORTHEAST

### Application Circular Number 50

# DISINFECTION OF NONPOROUS NON-FOOD CONTACT SURFACES

#### *DIRECTIONS FOR USE*

##### RINSE METHOD

Prepare a disinfecting solution by thoroughly mixing 6 oz. of this product with 10 gallons of water to provide approximately 600 ppm available chlorine by weight. Clean equipment surfaces in the normal manner. Prior to use, rinse all surfaces thoroughly with the disinfecting solution, maintaining contact with the solution for at least 10 minutes. Do not rinse equipment with water after treatment and do not soak equipment overnight.

##### IMMERSION METHOD

Prepare a disinfecting solution by thoroughly mixing in an immersion tank, 6 oz. of this product with 10 gallons of water to provide approximately 600 ppm available chlorine by weight. Clean equipment in the normal manner. Prior to use, immerse equipment in the disinfecting solution for at least 10 minutes and allow the disinfectant to drain. Do not rinse equipment with water after treatment.

## BRENTAG NORTHEAST

Application Circular Number 60

# SEWAGE & WASTEWATER EFFLUENT TREATMENT

### *DIRECTIONS FOR USE*

The disinfection of sewage effluent must be evaluated by determining the total number of coliform bacteria and/or fecal coliform bacteria, as determined by the Most Probable Number (MPN) procedure, and confirming that the MPN of the chlorinated effluent has been reduced to or below the maximum permitted by the controlling regulatory jurisdiction. On the average, satisfactory disinfection of secondary wastewater effluent can be obtained when the chlorine residual is 0.5 ppm after a 15 minute contact time. Although the chlorine residual is the critical factor in disinfection, the importance of correlating chlorine residual with bacterial kill must be emphasized. The MPN of the effluent, which is directly related to the water quality standards requirements, should be the final and primary standard and the chlorine residual should be considered an operating standard valid only to the extent verified by the coliform quality of the effluent.

The following are critical factors affecting wastewater disinfection:

1. **Mixing:** It is imperative that the product and the wastewater be instantaneously and completely flash mixed to assure reaction with every chemically active soluble and particulate component of the wastewater.
2. **Contacting:** Upon flash mixing, the flow through the system must be maintained.
3. **Dosage/Residual Control:** Successful disinfection is extremely dependent on response to fluctuating chlorine demand to maintain a predetermined, desirable chlorine level. Secondary effluent should contain 0.2 to 1.0 ppm chlorine residual after a 15 to 30 minute contact time. A reasonable average of residual chlorine is 0.5 ppm after a 15 minute

### **SEWAGE AND WASTEWATER TREATMENT**

#### **EFFLUENT SLIME CONTROL**

Apply a 100 to 1000 ppm available chlorine solution at a location which will allow complete mixing. Prepare this solution by mixing 10 to 100 oz. of this product with 100 gallons of water. Once control is evident, apply a solution containing approximately 15 ppm available chlorine. Prepare this solution by mixing 3 oz. of this product with 100 gallons of water.

#### **FILTER BEDS-SLIME CONTROL**

Remove filter from service, drain to a depth of 1 ft. above filter sand, and add 80 oz. of product per 20 sq. ft. evenly over the surface. Wait 30 minutes before draining water to a level that is even with the top of the filter. Wait for 4 to 6 hours before completely draining and backwashing filter.

**PULP AND PAPER MILL PROCESS WATER SYSTEMS**

**SLUG FEED METHOD**

Initial Dose: When system is noticeably fouled, apply 52 to 104 oz. of this product per 10,000 gallons of water in the system to obtain from 5 to 10 ppm available chlorine. Repeat until control is achieved. Subsequent Dose: When microbial control is evident, add 11 oz. of this product per 10,000 gallons of water in the system daily, or as needed to maintain control and keep the chlorine residual at 1 ppm. Badly fouled systems must be cleaned before treatment is begun.

**INTERMITTENT FEED METHOD**

Initial Dose: When system is noticeably fouled, apply 52 to 104 oz. of this product per 10,000 gallons of water in the system to obtain 5 to 10 ppm available chlorine. Apply half (or 1/3, 1/4, or 1/5) of this initial dose when half (or 1/3, 1/4, or 1/5) of the water in the system has been lost by blow down. Subsequent Dose: When microbial control is evident, add 11 oz. of this product per 10,000 gallons of water in the system to obtain a 1 ppm residual. Apply half (or 1/3, 1/4, or 1/5) of this initial dose when half (or 1/3, 1/4, or 1/5) of the water in the system has been lost by blow down.

Badly fouled systems must be cleaned before treatment is begun.

**CONTINUOUS FEED METHOD**

Initial Dose: When system is noticeably fouled, apply 52 to 104 oz. of this product per 10,000 gallons of water in the system to obtain 5 to 10 ppm available chlorine. Subsequent Dose: Maintain this treatment level by starting a continuous feed of 1 oz. of this product per 1,000 gallons of water lost by blow down to maintain a residual of approximately 1 ppm. Badly fouled systems must be cleaned before treatment is begun.



## BRENNTAG NORTHEAST

### Application Circular Number 70

#### COOLING TOWER & EVAPORATIVE CONDENSER WATER

##### *DIRECTIONS FOR USE*

##### SLUG FEED METHOD

Initial Dose: When system is noticeably fouled, apply 52 to 104 oz. of this product per 10,000 gallons of water in the system to obtain from 5 to 10 ppm available chlorine. Repeat until control is achieved. Subsequent Dose: When microbial control is evident, add 11 oz. of this product per 10,000 gallons of water in the system daily, or as needed to maintain control and keep the chlorine residual at 1 ppm. Badly fouled systems must be cleaned before treatment is begun.

##### INTERMITTENT FEED METHOD:

Initial Dose: When system is noticeably fouled, apply 52 to 104 oz. of this product per 10,000 gallons of water in the system to obtain 5 to 10 ppm available chlorine. Apply half (or 1/3, 1/4, or 1/5) of this initial dose when half (or 1/3, 1/4, or 1/5) of the water in the system has been lost by blowdown. Subsequent Dose: When microbial control is evident, add 11 oz. of this product per 10,000 gallons of water in the system to obtain a 1 ppm residual. Apply half (or 1/3, 1/4, or 1/5) of this initial dose when half (or 1/3, 1/4, or 1/5) of the water in the system has been lost by blow down. Badly fouled systems must be cleaned before treatment is begun.

##### CONTINUOUS FEED METHOD:

Initial Dose: When system is noticeably fouled, apply 52 to 104 oz. of this product per 10,000 gallons of water in the system to obtain 5 to 10 ppm available chlorine.

Subsequent Dose: Maintain this treatment level by starting a continuous feed of 1 oz. of this product per 1,000 gallons of water lost by blow down to maintain a residual of approximately 1 ppm. Badly fouled systems must be cleaned before treatment is begun

# BRENNTAG NORTHEAST

## Application Circular Number 80

### SANITIZATION OF POROUS FOOD CONTACT SURFACES

#### *DIRECTIONS FOR USE*

##### RINSE METHOD

Prepare a sanitizing solution by thoroughly mixing 6 oz. of this product with 10 gallons of water to provide approximately 600 ppm available chlorine by weight. Clean surfaces in the normal manner. Prior to use, rinse all surfaces thoroughly with the sanitizing solution, maintaining contact with the sanitizer for at least 2 minutes. Rinse all surfaces with a solution containing approximately 200 ppm available chlorine, prepared by thoroughly mixing the product in a ratio of 2 oz. product with 10 gallons of water. Do not soak equipment overnight.

##### IMMERSION METHOD

Prepare a sanitizing solution by thoroughly mixing, in an immersion tank, 6 oz. of this product with 10 gallons of water to provide approximately 600 ppm available chlorine by weight. Clean equipment in the normal manner. Prior to use, immerse equipment in the sanitizing solution for at least 2 minutes and allow the sanitizer to drain. Immerse all surfaces in a solution containing approximately 200 ppm available chlorine, prepared by thoroughly mixing the product in a ratio of 2 oz. product with 10 gallons of water.

##### SPRAY/FOG METHOD

Pre-clean all surfaces after use. Prepare a sanitizing solution of approximately 600 ppm available chlorine of sufficient size by thoroughly mixing the product in a ratio of 6 oz. product with 10 gallons of water. Use spray or fogging equipment which can resist hypochlorite solutions. Always empty and rinse spray/fog equipment with potable water after use. Thoroughly spray or fog all surfaces until wet, allowing excess sanitizer to drain. Vacate area for at least 2 hours. Prior to using equipment, rinse all surfaces with a 200 ppm available chlorine solution. Prepare a sanitizing solution of approximately 200 ppm by thoroughly mixing 2 oz. of this product with 10 gallons of water.

19  
—  
21

## **BRENTAG NORTHEAST**

### **Application Circular Number 90**

#### **SANITIZATION OF POROUS NON-FOOD CONTACT SURFACES**

##### *DIRECTIONS FOR USE*

##### **RINSE METHOD**

Prepare a sanitizing solution by thoroughly mixing 6 oz. of this product with 10 gallons of water to provide approximately 600 ppm available chlorine by weight. Clean surfaces in the normal manner. Prior to use, rinse all surfaces thoroughly with the sanitizing solution, maintaining contact with the sanitizer for at least 2 minutes. Do not rinse equipment with water after treatment and do not soak equipment overnight.

##### **IMMERSION METHOD**

Prepare a sanitizing solution by thoroughly mixing, in an immersion tank, 6 oz. of this product with 10 gallons of water to provide approximately 600 ppm available chlorine by weight. Clean equipment in the normal manner. Prior to use, immerse equipment in the sanitizing solution for at least 2 minutes and allow the sanitizer to drain. Do not rinse equipment with water after treatment.

##### **SPRAY/FOG METHOD**

After cleaning, sanitize non-food contact surfaces with a solution containing approximately 600 ppm available chlorine by thoroughly mixing the product in a ratio of 6 oz. of this product with 10 gallons of water. Use spray or fogging equipment which can resist hypochlorite solutions. Always empty and rinse spray/fog equipment with potable water after use. Prior to using equipment, thoroughly spray or fog all surfaces until wet, allowing excess sanitizer to drain. Vacate area for at least 2 hours.

21  
21

# BRENNTAG NORTHEAST

## Application Circular Number 100

### SANITIZATION OF POROUS NON-FOOD CONTACT SURFACES

#### *DIRECTIONS FOR USE*

##### RINSE METHOD

Prepare a sanitizing solution by thoroughly mixing 6 oz. of this product with 10 gallons of water to provide approximately 600 ppm available chlorine by weight. Clean surfaces in the normal manner. Prior to use, rinse all surfaces thoroughly with the sanitizing solution, maintaining contact with the sanitizer for at least 2 minutes. Do not rinse equipment with water after treatment and do not soak equipment overnight.

##### IMMERSION METHOD

Prepare a sanitizing solution by thoroughly mixing, in an immersion tank, 6 oz. of this product with 10 gallons of water to provide approximately 600 ppm available chlorine by weight. Clean equipment in the normal manner. Prior to use, immerse equipment in the sanitizing solution for at least 2 minutes and allow the sanitizer to drain. Do not rinse equipment with water after treatment.

##### SPRAY/FOG METHOD

After cleaning, sanitize non-food contact surfaces with a solution containing approximately 600 ppm available chlorine by thoroughly mixing the product in a ratio of 6 oz. of this product with 10 gallons of water. Use spray or fogging equipment which can resist hypochlorite solutions. Always empty and rinse spray/fog equipment with potable water after use. Prior to using equipment, thoroughly spray or fog all surfaces until wet, allowing excess sanitizer to drain. Vacate area for at least 2 hours.

21  
21

## “STORAGE AND DISPOSAL”

### Do not contaminate water, food or feed by storage or disposal

**Pesticide Storage:** Store this product in a cool, dry area, away from direct sunlight and heat to avoid deterioration. “Do not store with easily oxidizable materials, acids, or reducers”. In case of spill, isolate container (if possible) and flood area with large amounts of water to dissolve all material before discarding this container in trash. **Emergency Handling:** In case of contamination or decomposition, do not reseal container. Isolate in open, well-ventilated area, and flood with large volume of water. Cool unopened drums in vicinity by water spray.

**Pesticide Disposal:** Pesticide wastes resulting from the use of this product may be disposed of on-site or at an approved waste disposal facility. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste Representative at the EPA Regional Office for guidance.

### Container Handling and Disposal

[For rigid Household/Residential Products]

[For rigid non-refillable container less than 5 gallons]

**Container Handling:** Nonrefillable rigid container. Do not re-use or refill this container. Triple rinse (or equivalent) promptly after emptying. Offer for recycling, if available, or throw in trash.

[For Commercial/Industrial/Institutional Products]

[For rigid non-refillable container less than 5 gallons]

**Container Handling:** Non-refillable rigid container. Do not re-use or refill this container.

Triple rinse container (or equivalent) promptly after emptying. Triple rinse as follows: Empty the remaining contents into application equipment or a mix tanks and drain for 10 seconds after the flow begins to drip. Fill the container ¼ full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank and store rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times. Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or incineration, or, if allowed by state and local authorities, by burning. If burned, stay of smoke.

[For Commercial/Industrial/Institutional Products]

[For rigid nonrefillable container greater than 5 gallons]

**Container Handling:** Nonrefillable rigid container. Do not re-use or refill this container.

Triple rinse container (or equivalent) promptly after emptying. Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank. Fill the container ¼ full with water. Replace and tighten closures. Tip containers on its end and tip it back and forth, ensuring at least one complete revolution, for 30 seconds. Stand the container on its end and tip it back and forth several times. Empty the rinsate into application equipment or a mix tank or store rinsate for the later use or disposal. Repeat this procedure two more times. Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or incineration, or, if allowed by state and local authorities, by burning. If burned, stay of smoke.