


ONE U.S. GALLON


NAVICOTE

ANTIFOULING

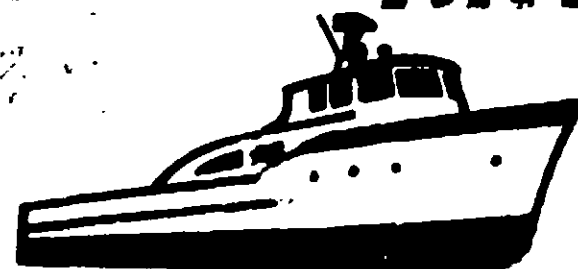

CAUTION

KEEP OUT OF REACH OF CHILDREN
HARMFUL IF SWALLOWED

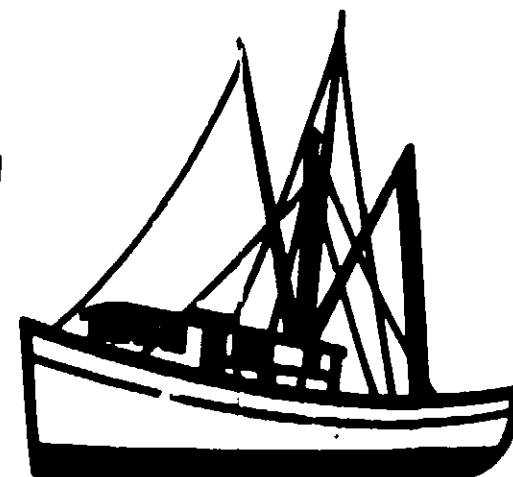

ACTIVE INGREDIENTS
Cuprous Oxide
INERT INGREDIENTS

33.3%*
66.7%

S. M. COPPER
ANTI-FOULING PAINT
M-078

CAUTION

DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME. Avoid breathing of vapor or spray mist. Avoid contact with skin. Do not take internally. Close container after using. Do not re-use empty container. Destroy it by perforating or crushing. Bury or discard in a safe place.

Do not contaminate water by cleaning of equipment or disposal of waste.

FIRST AID: If swallowed, induce vomiting. CALL A PHYSICIAN.

Use With Adequate Ventilation

NAVICOTE S. M. COPPER ANTIFOULING PAINT M-078

NAVICOTE S. M. COPPER ANTIFOULING PAINT M-078 is a heavy duty, cuprous oxide based paint for the protection of ship hulls and other submerged surfaces. It is applied by brush, roller or spray. It is resistant to the fouling action of barnacles, algae, and other marine growth. It is also resistant to the action of salt water and is suitable for use in all climates.

When applied to a clean, smooth surface, it will provide a long lasting, protective film. It is not recommended for use on painted surfaces or on surfaces that are already fouled.

Application Directions
1. Clean the surface to be painted. Remove all dirt, grease, and old paint. Sand the surface smooth. Wash with clean water and allow to dry.
2. Apply the paint by brush, roller or spray. Apply in two coats, allowing the first coat to dry before applying the second. The first coat should be applied in the direction of the grain of the wood or the surface of the steel. The second coat should be applied in the opposite direction.
3. Allow the paint to dry for at least 24 hours before the surface is exposed to water.

WOOD HULLS
For wood hulls, the paint should be applied to a clean, smooth surface. It is not recommended for use on painted surfaces or on surfaces that are already fouled. The paint should be applied in two coats, allowing the first coat to dry before applying the second. The first coat should be applied in the direction of the grain of the wood. The second coat should be applied in the opposite direction. Allow the paint to dry for at least 24 hours before the surface is exposed to water.

STEEL HULLS
For steel hulls, the paint should be applied to a clean, smooth surface. It is not recommended for use on painted surfaces or on surfaces that are already fouled. The paint should be applied in two coats, allowing the first coat to dry before applying the second. The first coat should be applied in the direction of the surface. The second coat should be applied in the opposite direction. Allow the paint to dry for at least 24 hours before the surface is exposed to water.

DEVUE & RAYNOLDS CO., INC.

New York, N.Y. 10004 San Francisco, California 94104 New Orleans, La. 70111

MADE IN U.S.A.