

WARNING

CONTAINS XYLOL, METHYL
ISOBUTYL KETONE AND
TRIBUTYL TIN FLUORIDE

DO NOT USE, POUR, SPILL OR
STORE NEAR HEAT OR OPEN
FLAME.

Avoid breathing of vapor or spray
mist.

Do not get in eyes, on skin or on
clothing.

May be absorbed through skin.

Personnel spraying this paint should
wear full face air mask and protective
clothing to avoid skin and eye contact.

Close container after using.

Do not reuse empty container.
Destroy it by perforating or crush-
ing. Bury or discard in a safe place.

Do not contaminate water by clean-
ing of equipment or disposal of
waste.

Avoid storage near feed or food-
stuffs.

FIRST AID: In case of contact, im-
mediately remove contaminated cloth-
ing and wash skin with soap and
water. For eyes, flush with plenty of
water and get medical attention.
Wash clothing before reuse. If swal-
lowed, induce vomiting and CALL A
PHYSICIAN.

USE WITH ADEQUATE
VENTILATION

DEVOE

MARINE

PAINTS & COATINGS • WORLD-WIDE

ANTI-FOULING NO. 1865

MD-3371


WARNING!

KEEP OUT OF REACH OF CHILDREN

VAPOR HARMFUL — COMBUSTIBLE
MAY CAUSE SEVERE EYE BURNS AND SKIN IRRITATION
HARMFUL OR FATAL IF SWALLOWED

Read Carefully Warning on Left Panel
FOR USE BY PROFESSIONAL APPLICATORS ONLY
EPA REG. NO. 9461-32 BATCH NO.

5 U. S. GALLONS

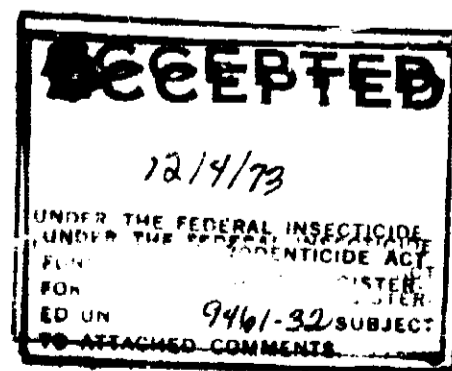

ANTI-FOULING INGREDIENTS
ACTIVE INGREDIENTS
Tributyltin Fluoride 11.88%
INERT INGREDIENTS 88.12%
100.00%

Directions for Use

Be sure that all surfaces are clean,
free of moisture, scale, grease or
oil. Remove all loose paint with
wire brush or scraper. Mix thor-
oughly both by stirring and then
pouring from one clean container
to another several times. Stir from
time to time during application.

Apply one or two coats "as is" on
ship bottoms by brush or roller. For
spraying, thin if necessary with
DEVORAN® MD-1931 Thinner. Do not
add oil or varnishes to this paint.
Allow 4 hours between coats.

Anti-Fouling paints must be applied
over suitable barrier coats and should
not be applied directly to metal. Ves-
sels may be launched anytime after
2 hours at 77° F. under good con-
ditions.

MUD 3371/608B 10/9/73

DEVOE & RAYNOLDS COMPANY, INC.

NEWARK, NEW JERSEY 07105
NEW ORLEANS, LA. 70117
SAN FRANCISCO, CALIF. 94104

WARNING

CONTAINS XYLOL, METHYL
ISOBUTYL KETONE AND
TRIBUTYL TIN FLUORIDE

DO NOT USE, POUR, SPILL OR
STORE NEAR HEAT OR OPEN
FLAME.

Avoid breathing of vapor or spray
mist.

Do not get in eyes, on skin or on
clothing.

May be absorbed through skin.

Personnel spraying this paint should
wear full face air mask and protective
clothing to avoid skin and eye contact.

Close container after using.

Do not reuse empty container.
Destroy it by perforating or crush-
ing. Bury or discard in a safe place.

Do not contaminate water by clean-
ing of equipment or disposal of
waste.

Avoid storage near feed or food-
stuffs.

FIRST AID: In case of contact, im-
mediately remove contaminated cloth-
ing and wash skin with soap and
water. For eyes, flush with plenty of
water and get medical attention.
Wash clothing before reuse. If swal-
lowed, induce vomiting and CALL A
PHYSICIAN.

USE WITH ADEQUATE
VENTILATION

DEVOE

MARINE

PAINTS & COATINGS • WORLD-WIDE

ANTI-FOULING NO. 1865


MD-3371

WARNING!


KEEP OUT OF REACH OF CHILDREN

VAPOR HARMFUL — COMBUSTIBLE
MAY CAUSE SEVERE EYE BURNS AND SKIN IRRITATION
HARMFUL OR FATAL IF SWALLOWED

Read Carefully Warning on Left Panel
FOR USE BY PROFESSIONAL APPLICATORS ONLY
EPA REG. NO. 9461-32 BATCH NO.

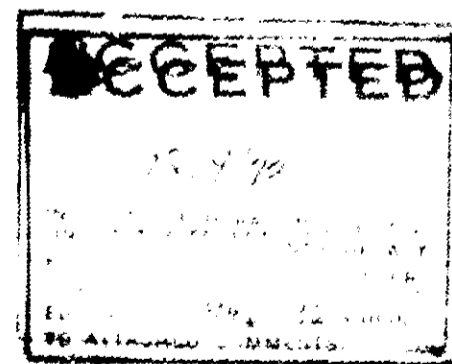

5 U. S. GALLONS

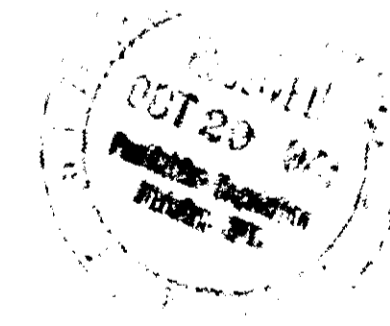

ANTI-FOULING INGREDIENTS
ACTIVE INGREDIENTS
Tributyltin Fluoride 11.88%
INERT INGREDIENTS 88.12%
100.00%

Directions for Use

Be sure that all surfaces are clean,
free of moisture, scale, grease or
oil. Remove all loose paint with
wire brush or scraper. Mix thor-
oughly both by stirring and then
pouring from one clean container
to another several times. Stir from
time to time during application.

Apply one or two coats "as is" on
ship bottoms by brush or roller. For
spraying, thin if necessary with
DEVORAN MD-1931 Thinner. Do not
add oil or varnishes to this paint.
Allow 4 hours between coats.

Anti-fouling paints must be applied
over suitable barrier coats and should
not be applied directly to metal. Ves-
sels may be launched anytime after
2 hours at 77° F, under good con-
ditions.

MUD 3371 608B 10 9 71

DEVOE & RAYNOLD COMPANY, INC.

NEWARK, NEW JERSEY 07102

NEW ORLEANS, LA 70111

SAN FRANCISCO, CALIF 94104