MARINE

PAINTS & COATINGS · WORLD-WIDE FORMULA 105 ANTI-FOULING COLD PLASTIC MIL-P-19451 **MD-1598**

CAUTION

KEEP OUT OF REACH OF CHILDREN


VAPOR HARMFUL - COMBUSTIBLE HARMFUL IF SWALLOWED Read Carefully Cautions on Back Panel

FOR USE BY PROFESSIONAL APP'ICATORS ONLY

5 U. S. GALLONS

USDA REG. NO. 9461-38

and the second s

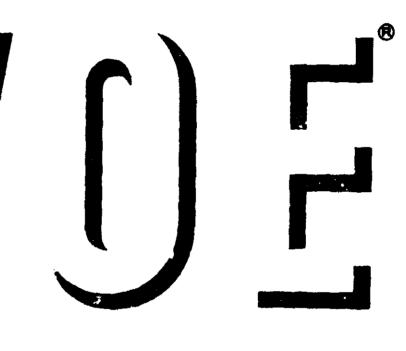



ACTIVE INGREDIENTS Cuprous Oxide INERT INGREDIENTS

BATCH NO

6: D & R CO. 1663

-<u>₹</u>- 5'

60.51

100.017

DIRECTIONS FOR USE

Be sure that all surfaces are clean, free of mulsture, scale, grease or oil, remove all loose paint with wire brush or scraper. Mix thoroughly both by stirring and then pouring from one clean container to another several times. Stir from time to time during application

Apply one or two coats "as is" or ship bottoms by brush or roller. For spraying, thin if necessary with MD-542 Thinner, Do not add oil or varnishes to this paint. Allow 4 hours between coats.

Anti-Fouling paints must be applied over suitable barrier coats and should not be applied directly to metal. Launching may be accomplished as soon as one hour after the final application but not later than 24 hours after final application.

CAUTION

CONTAINS AROMATIC HYDROCARBONS

Keep away from heat and open flame. Avoid breathing of vapor or spray mist. Avoid contact with skin. Do not take internally. Close container after using.

USE WITH ADEQUATE VENTILATION



07:05

J.

70117



MUD-MAF MD-1598 4 1 69

Newark, N. J. -- New Orleans, La. -- San Francisco, Calif. 94104