

CAUTION

CONTAINS METHYL
ISOBUTYL KETONE
AND CUPROUS OXIDE

DO NOT USE, POUR, SPILL OR
STORE NEAR HEAT OR OPEN
FLAME.

Avoid breathing of vapor or spray
mist.

Avoid contact with skin.

Do not take internally.

Close container after using. Do not
reuse empty container. Destroy it
by perforating or crushing. Bury
or discard in a safe place.

FIRST AID: If swallowed, do NOT
induce vomiting.

CALL A PHYSICIAN

USE WITH ADEQUATE
VENTILATION

DEVOE

MARINE

PAINTS & COATINGS • WORLD-WIDE

FORMULA 129
VINYL BLACK ANTI-FOULING MIL-P-16189A
MD-1407

CAUTION

KEEP OUT OF REACH OF CHILDREN

VAPOR HARMFUL--COMBUSTIBLE
HARMFUL IF SWALLOWED

Read carefully cautions on left panel
FOR USE BY PROFESSIONAL APPLICATORS ONLY

5 U. S. GALLONS

USDA REG. NO. 9461-39

ANTI-FOULING INGREDIENTS
ACTIVE INGREDIENTS
Cuprous Oxide
INERT INGREDIENTS

52.78%*
47.22%
100.00%

*Equivalent to 45.3%
Metallic Copper

BATCH NO.

Directions for Use

Be sure that all surfaces are clean,
free of moisture, scale, grease or
oil. Remove all loose paint with
wire brush or scraper. Mix thor-
oughly both by stirring and then
pouring from one clean container
to another several times. Stir from
time to time during application.

Apply one or two coats "as is" on
ship bottoms by brush or roller. For
spraying, thin if necessary with
DEVTRAN® MD-1931 Thinner. Do
not add oil or varnishes to this
paint. Allow 4 hours between
coats.

Anti-Fouling paints must be ap-
plied over suitable barrier coats
and should not be applied directly
to metal. Vessels may be launched
anytime after 2 hours at 77° F.
under good conditions.

MAF 1407/693 7/19/71

A PRODUCT OF
**DEVOE & RAYNOLDS
COMPANY, INC.**
NEWARK, NEW JERSEY 07105
NEW ORLEANS, LA. 70117
SAN FRANCISCO, CALIF. 94104

2/16/72
9461-39

CAUTION

CONTAINS METHYL
ISOBUTYL KETONE
AND CUPROUS OXIDE

DO NOT USE, POUR, SPILL OR
STORE NEAR HEAT OR OPEN
FLAME.

Avoid breathing of vapor or spray
mist.

Avoid contact with skin.

Do not take internally.

Close container after using. Do not
reuse empty container. Destroy it
by perforating or crushing. Bury
or discard in a safe place.

FIRST AID: If swallowed, do NOT
induce vomiting.
CALL A PHYSICIAN.

USE WITH ADEQUATE
VENTILATION

DEVORE

MARINE

PAINTS & COATINGS • WORLD-WIDE

FORMULA 129

VINYL BLACK ANTI-FOULING MIL-P-16189A

MD-1407

CAUTION

KEEP OUT OF REACH OF CHILDREN

VAPOR HARMFUL—COMBUSTIBLE
HARMFUL IF SWALLOWED

Read carefully cautions on left panel
FOR USE BY PROFESSIONAL APPLICATORS ONLY

USDA REG. NO. 9461-39

ANTI-FOULING INGREDIENTS

ACTIVE INGREDIENTS

Cuprous Oxide
INERT INGREDIENTS


52.78%*

47.22%

100.00%

*Equivalent to 45.3%
Metallic Copper

BATCH NO.

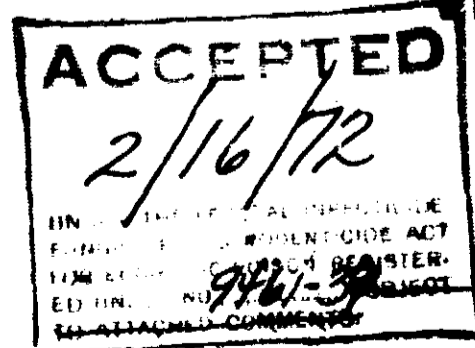

5 U. S. GALLONS

Directions for Use

Be sure that all surfaces are clean,
free of moisture, scale, grease or
oil. Remove all loose paint with
wire brush or scraper. Mix thor-
oughly both by stirring and then
pouring from one clean container
to another several times. Stir from
time to time during application.

Apply one or two coats "as is" on
ship bottoms by brush or roller. For
spraying, thin if necessary with
DEVORAN® MD-1931 Thinner. Do
not add oil or varnishes to this
paint. Allow 4 hours between
coats.

Anti-Fouling paints must be ap-
plied over suitable barrier coats
and should not be applied directly
to metal. Vessels may be launched
anytime after 2 hours at 77° F.
under good conditions.

MAF 1407/693 7/19/71

A PRODUCT OF
**DEVORE & RAYNOLDS
COMPANY, INC.**

NEWARK, NEW JERSEY 07102

NEW ORLEANS, LA. 70117

SAN FRANCISCO, CALIF. 94104