

DEVORE[®]

MARINE

FINISHES & COATINGS · WORLD-WIDE

FORMULA 213

MD-1987 DEVORAN[®]

BLACK ANTI-FOULING SHIPBOTTOM COATING

WARNING

KEEP OUT OF REACH OF CHILDREN

VAPOR HARMFUL - COMBUSTIBLE

Read Carefully Cautions on Back Panel

ACTIVE INGREDIENTS

Organic Grade

INERT INGREDIENTS

100%

100%

ALLONS


FOR USE BY PROFESSIONAL APPLICATORS ONLY

DEVO

MARIN

PAINTS & COATINGS · WORLD

**FORMULA 213
MD-1987 DEVRAN[®]
BLACK ANTI-FOULING SHIPBOTTOM COA**

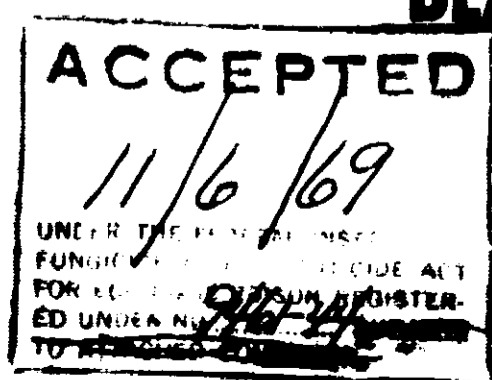

5 11 & GALLONS

**WARNING
KEEP OUT OF REACH OF CHILDREN
VAPOR HARMFUL - COMBUSTIBLE**

Read Carefully Cautions on Back Panel

FOR USE BY PROFESSIONAL APPLICATORS ONLY

ACTIVE IN
Cuprous
INERT IN

DIRECTIONS FOR USE

Be sure that all surfaces are clean, free of moisture, rust, grease or oil. Remove all loose paint with wire brush or scraper. Mix thoroughly both by stirring and then pouring from one clean container to another several times before and time to time during application.

Apply one or two coats "as is" or slightly thinned by hand or roller. For spraying thin if necessary with DEVRANT MD (43) Thinner. Do not add oil or varnishes to this paint. Allow 4 hours between coats.

Anti-Fouling paints must be applied over suitable barrier coat and should not be applied directly to metal. Vessels may be launched anytime after 2 hours at 70° F. under good conditions.

CAUTION

CONTAINS AROMATIC HYDROCARBONS AND KETONES

Keep away from heat and open flame. Avoid breathing of vapor or spray mist. Avoid contact with skin. Do not take internally. Close container after use.

USE WITH ADEQUATE VENTILATION

MUD VAF 8 1 69

A Product of
DEVUE & RAYNOLDS CO., INC.

Newark, N. J.
07102

New Orleans, La.
70112

San Francisco, Calif.
94104