

DEVVOE

MARINE

PAINTS & COATINGS • WORLD-WIDE

**FORMULA 121
VINYL RED ANTI-FOULING MIL-P-15931A
MD-1365**

WARNING!

KEEP OUT OF REACH OF CHILDREN

**COMBUSTIBLE - VAPOR HARMFUL
HARMFUL OR FATAL IF SWALLOWED**

FOR USE BY PROFESSIONAL APPLICATORS ONLY

Read Carefully Cautions on Left Side Panel

E.P.A. REG. NO. 9461-45

ACTIVE INGREDIENTS
Cuprous Oxide
INERT INGREDIENTS

55.17%*
44.83%
100.00%

*Equivalent to 38.5%
Metallic Copper

BATCH NO.

CAUTION

CONTAINS XYLOL, METHYL
ISOBUTYL KETONE AND
CUPROUS OXIDE

DO NOT USE, POUR, SPILL OR
STORE NEAR HEAT OR OPEN
FLAME.

Avoid breathing of vapor or spray
mist.

Avoid contact with skin.

Do not take internally.

Close container after using.

Do not reuse empty container. Des-
troy it by perforating or crushing.

Bury or discard in a safe place.

FIRST AID: If swallowed, do NOT
induce vomiting. CALL A PHY-
SICIAN.

USE WITH
ADEQUATE VENTILATION

5 U. S. GALLONS

Directions for Use

Apply one coat to metal surfaces. For
wood surfaces, apply two coats. Allow
4 hours between coats. For maximum
protection, apply a third coat after
24 hours. Do not apply to metal
surfaces that are wet or oily. Stir from
time to time during application.

Apply one coat to ship bottoms by brush or roller. For
spraying, thin if necessary with
DEVVRAN[®] MD-1931 Thinner. Do
not add oil or varnishes to this
paint. Allow 4 hours between coats.
Anti-Fouling paints must be ap-
plied over suitable barrier coats
and should not be applied directly
to metal. Vessels may be launched
anytime after 2 hours at 77°F. un-
der good conditions.

MAF 12/683B 7/21/71

A PRODUCT OF

**DEVVOE & RAYNOLDS
COMPANY, INC.**

NEWARK, NEW JERSEY 07105
NEW ORLEANS, LA 70117
SAN FRANCISCO, CALIF. 94104

DEVVOE

MARINE

PAINTS & COATINGS • WORLD-WIDE

**FORMULA 121
VINYL RED ANTI-FOULING MIL-P-15931A
MD-1365**


WARNING!

**KEEP OUT OF REACH OF CHILDREN
COMBUSTIBLE - VAPOR HARMFUL
HARMFUL OR FATAL IF SWALLOWED**

ACTIVE INGREDIENTS
Cuprous Oxide 55.17%*
INERT INGREDIENTS 44.83%
100.00%
*Equivalent to 38.5%
Metallic Copper

BATCH NO.

FOR USE BY PROFESSIONAL APPLICATORS ONLY
Read Carefully Cautions on Left Side Panel
EPA REG NO. 9461-AR

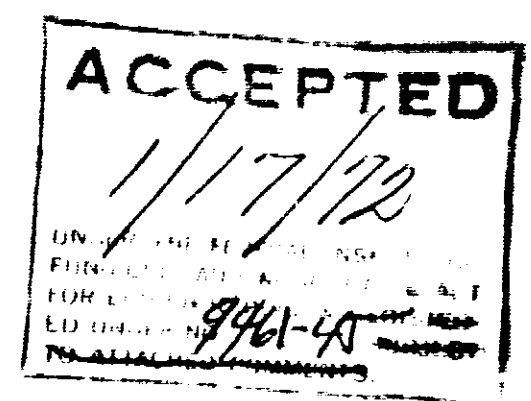

5 U. S. GALLONS

CAUTION

**CONTAINS XYLOL, METHYL
ISOBUTYL KETONE AND
CUPROUS OXIDE**

**DO NOT USE, POUR, SPILL OR
STORE NEAR HEAT OR OPEN
FLAME.**

**Avoid breathing of vapor or spray
mist.**

Avoid contact with skin.

Do not take internally.

Close container after using.

**Do not reuse empty container. Des-
troy it by perforating or crushing.**

Bury or discard in a safe place.

**FIRST AID: If swallowed, do NOT
induce vomiting. CALL A PHY-
SICIAN.**

**USE WITH
ADEQUATE VENTILATION**

Directions for Use

Be sure that all surfaces are clean,
free of moisture, scale, grease or
oil. Remove all loose paint with
wire brush, or scraper. Mix thor-
oughly both by stirring and then
pouring from one clean container
to another several times. Stir from
time to time during application.

Apply one or two coats "as is" on
ship bottoms by brush or roller. For
spraying, thin if necessary with
DEVVAN® MD-1931 Thinner. Do
not add oil or varnishes to this
paint. Allow 4 hours between coats.
Anti-Fouling paints must be ap-
plied over suitable barrier coats
and should not be applied directly
to metal. Vessels may be launched
anytime after 2 hours at 77°F. un-
der good conditions.

MAF 12/683B 7/21/71

**A PRODUCT OF
DEVVOE & RAYNOLDS
COMPANY, INC.**

**NEWARK, NEW JERSEY 07105
NEW ORLEANS, LA. 70117
SAN FRANCISCO, CALIF. 94104**