

ACCEPTED
 9-15-69
 UNDER THE FEDERAL INSECTICIDE ACT
 FOR ECONOMIC PEST CONTROL REGISTERED
 NO. 9416-46

ACCEPTED
 9-15-69
 UNDER THE FEDERAL INSECTICIDE ACT
 FOR ECONOMIC PEST CONTROL REGISTERED
 NO. 9416-46

DEVOE

MARINE

PAINTS & COATINGS • WORLD-WIDE

ANTI-FOULING

MD-3197

CAUTION

CONTENTS
5 U. S. GALS.

KEEP OUT OF REACH OF CHILDREN
VAPOR HARMFUL - COMBUSTIBLE
HARMFUL IF SWALLOWED

ANTI-FOULING INGREDIENTS
 ACTIVE INGREDIENTS
 C. 100%
 INERT INGREDIENTS 41%

DIRECTIONS FOR USE

Be sure all surfaces are clean, free of scale, grease or oil. Remove all loose paint with wire brush or scraper. Mix thoroughly.

APPLICATION

Apply by Hot Spray Equipment. Use VINYL THINNER for cleanup. Do not add oil or varnishes to this paint. Anti-Fouling paints must be applied over suitable barrier coats and should not be applied directly to metal. Vessels may be launched anytime after 2 hours at 77 degrees F. under good conditions. If more than one coat MD-3197 is applied, allow four hours between coats.

CAUTION


CONTAINS AROMATIC HYDROCARBONS AND KETONES

Keep away from heat and open flame. Avoid breathing of vapor or spray mist. Avoid contact with skin. Do not take internally. Close container after using.

USE WITH ADEQUATE VENTILATION

MUD-VAF 3197 3/15/60

A Product of
DEVOE & RAYNOLDS CO., INC.
 NEWARK, N. J. • NEW ORLEANS, LA. • SAN FRANCISCO, CALIF.

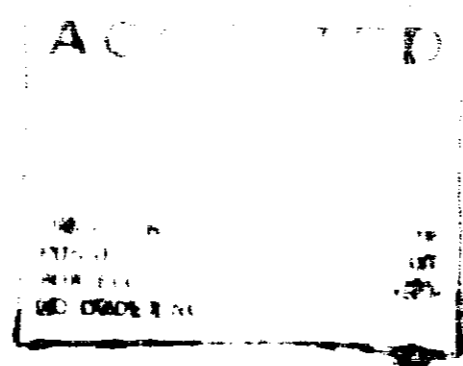

DEVOE[®] MARINE

PAINTS & COATINGS · WORLD-WIDE


**ANTI-FOULING
MD-3197
CAUTION**

**CONTENTS
5 U. S. GALS.**

**KEEP OUT OF REACH OF CHILDREN
VAPOR HARMFUL - COMBUSTIBLE
HARMFUL IF SWALLOWED**

ANTI-FOULING INGREDIENTS
ACTIVE INGREDIENTS
INERT INGREDIENTS

Read carefully cautions on back panel

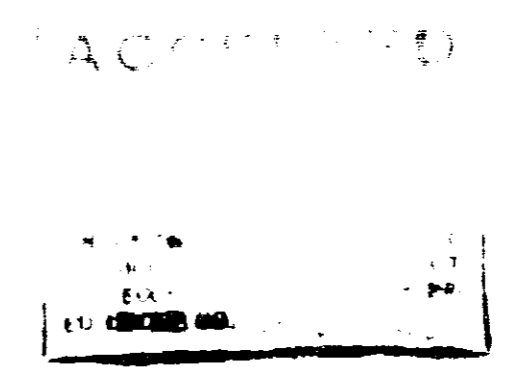

DIRECTIONS FOR USE

Be sure all surfaces are clean, free of oil, grease, dirt. Remove all loose paint with wire brush or scraper. Mix thoroughly.

APPLICATION

Apply by Hot Spray Equipment. Use VINYL THINNER for cleanup. Do not add oil or varnishes to this paint. Anti-Fouling paints must be applied over suitable barrier coats and should not be applied directly to metal. Vessels may be painted and repainted at 77 degrees F. under good conditions. If more than one coat of MD-3197 is applied, allow four hours between coats.

CAUTION

CONTAINS AROMATIC HYDROCARBONS AND KETONES

Keep away from heat and open flame. Avoid contact with skin and spray mist. Avoid contact with water. Wash thoroughly with soap and water after using.

USE WITH ADEQUATE VENTILATION

MUD VAF 3197 3 15 69

A Product of
DEVOE & RAYNOLDS CO., INC.
NEWARK, N. J. • NEW ORLEANS, LA. • SAN FRANCISCO, CALIF.