

DEVOE

MARINE

PAINTS & COATINGS · WORLD-WIDE

MUD MAF 1754 3/3/70

TROPICAL ANTI-FOULING SHIP BOTTOM PAINT MD-1754

ACTIVE INGREDIENTS	
Cuprous Oxide	15.3%
Bis (Tri-n-Butyltin) Oxide	1.0%
INERT INGREDIENTS	
	83.7%
	100.0%

WARNING
KEEP OUT OF THE REACH OF CHILDREN
VAPOR HARMFUL — COMBUSTIBLE
HARMFUL IF SWALLOWED

Read carefully cautions on back panel
FOR USE BY PROFESSIONAL APPLICATORS ONLY
USDA REG. NO. 9461-59

ACCEPTED
5-4-70
UNDER THE FEDERAL INSECTICIDE
FUNGICIDE AND RODENTICIDE ACT
FOR ECONOMIC PESTS REGISTERED
EO UNDER NO. 9461-59

5 U.S. GALLONS

BATCH NO.

DDAFCO

DIRECTIONS FOR USE

Be sure that all surfaces are clean, free of moisture, scale, grease or oil. Remove all loose paint with wire brush or scraper. Mix thoroughly, both by stirring and then pouring from one clean container to another several times. Stir from time to time during application.

Apply one or two coats "as is" on ship bottoms by brush or roller. For spraying, thin if necessary with MD-542 THINNER. Do not add oil or varnishes to this paint. Allow four hours between coats.

Anti-Fouling paints must be applied over suitable barrier coats and should not be applied directly to metal. Launching may be accomplished as soon as one hour after the final application but not later than 24 hours after final application.

WARNING

**CONTAINS AROMATIC HYDROCARBONS
AND BIS (TRI-n-BUTYLTIN) OXIDE**

Keep away from heat and open flame. Avoid breathing of vapor or spray mist. Avoid contact with skin, eyes or clothing. May be absorbed through skin. Causes: skin irritation. In case of contact, immediately remove contaminated clothing and wash skin with soap and water. For eyes, flush with plenty of water and get medical attention. Wash clothing before reuse. Do not take internally. Close container after using. Avoid storage near feed or foodstuffs.

USE WITH ADEQUATE VENTILATION

MUD-MAF 1754 3/3/70

A Product of
DEVGE & RAYNOLDS CO., INC.
Newark, N. J. 07106 • San Francisco, California 94104 • New Orleans, La. 70117

ACCEPTED
5-4-70

DEVORE[®] MARINE

PAINTS & COATINGS · WORLD-WIDE

MUD-MAF 1754 3 3 76

**TROPICAL
ANTI-FOULING SHIP BOTTOM PAINT
MD-1754**


ACTIVE INGREDIENTS
Cuprous Oxide 15.2%
Bis (Tri-n-Butyltin) Oxide 1.0%
INERT INGREDIENTS 83.7%
100.0%

WARNING
KEEP OUT OF THE REACH OF CHILDREN
VAPOR HARMFUL — COMBUSTIBLE
HARMFUL IF SWALLOWED

Read carefully cautions on back panel
FOR USE BY PROFESSIONAL APPLICATORS ONLY

USDA REG. NO. 9461-59

BATCH NO.

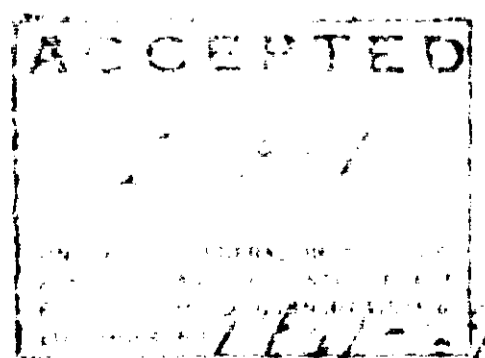

5 U.S. GALLONS

DIRECTIONS FOR USE

Be sure that all surfaces are clean, free of moisture, scale, grease or oil. Remove all loose paint with wire brush or scraper. Mix thoroughly, both by stirring and then pouring from one clean container to another several times. Stir from time to time during application.

Apply one or two coats "as is" on ship bottoms by brush or roller. For spraying, thin if necessary with MD-512 THINNER. Do not add oil or varnishes to this paint. Allow four hours between coats.

Anti-Fouling paints must be applied over suitable barrier coats and should not be applied directly to metal. Launching may be accomplished as soon as one hour after the final application but not later than 24 hours after final application.

WARNING

**CONTAINS AROMATIC HYDROCARBONS
AND BIS (TRI-n-BUTYL TIN) OXIDE**

Keep away from heat and open flame. Avoid breathing of vapor or spray mist. Avoid contact with skin, eyes or clothing. May be absorbed through skin. Causes skin irritation. In case of contact, immediately remove contaminated clothing and wash skin with soap and water. For eyes, flush with plenty of water and get medical attention. Wash clothing before reuse. Do not take internally. Close container after using. Avoid storage near feed or foodstuffs.

USE WITH ADEQUATE VENTILATION

MUD-MAF 1754 3 3 76

A Product of
DEVORE & RAYNOLDS CO., INC.
Newark, N. J. 07105 • San Francisco, California 94104 • New Orleans, La. 70117