

CAUTION

CONTAINS

**BIS (TRIBUTYL TIN) OXIDE
AND CUPROUS OXIDE**

DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME

Avoid breathing of vapor or spray mist

May be absorbed through skin. Avoid skin irritation.

Avoid contact with skin, eyes or clothing.

Avoid contact with food and food products.

Observe safety precautions. Do not use in confined spaces. Use in well-ventilated areas. Avoid contact with eyes and clothing. Wash thoroughly after use.

Do not use in confined spaces. Use in well-ventilated areas. Avoid contact with eyes and clothing. Wash thoroughly after use.

Do not use in confined spaces. Use in well-ventilated areas. Avoid contact with eyes and clothing. Wash thoroughly after use.

Do not use in confined spaces. Use in well-ventilated areas. Avoid contact with eyes and clothing. Wash thoroughly after use.


Do not use in confined spaces. Use in well-ventilated areas. Avoid contact with eyes and clothing. Wash thoroughly after use.

USE WITH ADEQUATE
VENTILATION

DEVVOE

MARINE

PAINTS & COATINGS · WORLD-WIDE

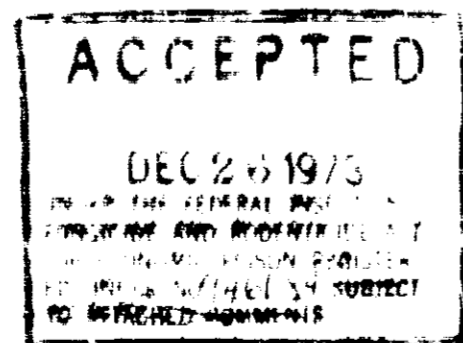

**DEVVAN MX075
ANTI-FOULING PAINT BASE
MD-3813**

WARNING

KEEP OUT OF REACH OF CHILDREN

**VAPOR HARMFUL—COMBUSTIBLE
HARMFUL IF SWALLOWED**

Read carefully cautions on left panel
FOR USE BY PROFESSIONAL APPLICATORS ONLY

F.P.A. REG. NO. 116794

4 U. S. GALLONS

IMPORTANT

The contents of this container are part of a two component DEVVAN Epoxy Coating and must be mixed with Devvan MD-3052 before coating.

Directions for Use

Before use, the surface to be coated must be clean, dry, and free of oil, dirt, and loose material. The surface must be roughened with a fine sandpaper or similar material. The surface must be primed with Devvan MD-3052 before the epoxy coating is applied. The epoxy coating must be applied in two coats. The first coat must be applied and allowed to cure for 24 hours before the second coat is applied. The second coat must be applied and allowed to cure for 72 hours before the surface is used.

Devvan Epoxy Coating is a two component system. The epoxy resin (Devvan MX075) and the hardener (Devvan MD-3052) must be mixed in the correct ratio before use. The mixture must be applied immediately after mixing and allowed to cure for the specified time.

**DEVVOE & RAYNOLDS
COMPANY, INC.**
NEWARK, NEW JERSEY 07105
NEW ORLEANS, LA 70117
SAN FRANCISCO, CALIF. 94104