

WARNING

**CONTAINS
BUTYL ALCOHOL
AND CUPROUS OXIDE**

DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME.

Avoid breathing of vapor or spray mist.

Avoid contact with skin and eyes.

Do not take internally.

Close container after using. Do not reuse empty container; destroy it by perforating or crushing and bury or discard in a safe place.

Do not contaminate water by cleaning of equipment or disposal of wastes.

FIRST AID: If swallowed, induce vomiting. CALL A PHYSICIAN.

In case of skin contact wash with soap and water; for eyes, flush with plenty of water and get medical attention.

**USE WITH ADEQUATE
VENTILATION**

DEVVOE

MARINE

PAINTS & COATINGS • WORLD-WIDE

DEVVRAN[®] 216 PERMANENT RED ANTI-FOULING PAINT


MD-3832

WARNING!

**KEEP OUT OF REACH OF CHILDREN
HARMFUL IF SWALLOWED
VAPOR HARMFUL — COMBUSTIBLE**
Read carefully warning on left panel.

ACTIVE INGREDIENT	
Cuprous Oxide	34.83%*
INERT INGREDIENTS	65.12%
	<hr/>
	100.00%

*Equivalent to 30.92%
Metallic Copper

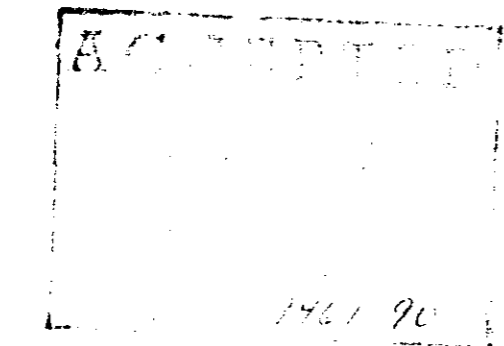

**5 U.S. GALLONS
(18.925 LITERS)**

E.P.A. REG. NO. 9461-90

BATCH NO

**DIRECTIONS FOR USE
ON STEEL HULLS**

Be sure that all surfaces are clean, free of moisture, scale, grease or oil. Remove all loose paint with wire brush or scraper. Mix thoroughly, both by stirring and then pouring from one clean container to another several times. Stir from time to time during application.

Apply one or two coats "as is" on ship bottoms by brush or roller. For spraying, thin if necessary with No. 2 Solvent MD-3630. Do not add oil or varnishes to this paint. Allow four hours between coats.

Anti-Fouling paints must be applied over suitable barrier coats and should not be applied directly to metal. Launching may be accomplished as soon as one hour after the final application.

FOR INDUSTRIAL USE ONLY

MAF 3832 748 5 1 '74

A PRODUCT OF
**DEVVOE & RAYNOLDS
COMPANY, INC.**

NEW YORK, N. Y. 10004
NEW ORLEANS, LA. 70117
EMERYVILLE, CALIF. 94608