

**WARNING!**

**CONTAINS XYLOL,  
BIS (TRIBUTYL TIN) OXIDE  
AND CUPROUS OXIDE**

DO NOT USE, POUR, SPILL OR  
STORE NEAR HEAT OR OPEN  
FLAME.

Avoid breathing of vapor or spray  
mist.

May be absorbed through skin.  
Causes skin irritation.

Avoid contact with skin, eyes or  
clothing.

Avoid storage near food and food  
products.

Close container after using. Do not  
reuse empty container; destroy it  
by perforating or crushing and  
bury or discard in a safe place.

Do not contaminate water by clean-  
ing of equipment or disposal of  
wastes.

FIRST AID: if swallowed, do NOT  
induce vomiting. CALL A PHYSI-  
CIAN.

In case of skin contact remove con-  
taminated clothing and wash skin  
with soap and water; for eyes,  
flush with plenty of water and get  
medical attention. Wash clothing  
before reuse.

**USE WITH ADEQUATE  
VENTILATION**

# DEVORE

# MARINE

**PAINTS & COATINGS • WORLD-WIDE**

**DEVORAN<sup>®</sup> 222**

**ALLSEAS<sup>®</sup> PERMANENT RED ANTI-FOULING PAINT**

**MD-4312**


**WARNING!**

**KEEP OUT OF REACH OF CHILDREN  
VAPOR HARMFUL — COMBUSTIBLE  
HARMFUL OR FATAL IF SWALLOWED**

Read Carefully Warning on Left Panel

E.P.A. REG. NO. 9461-93

**5 U. S. GALLONS  
(18.925 LITERS)**

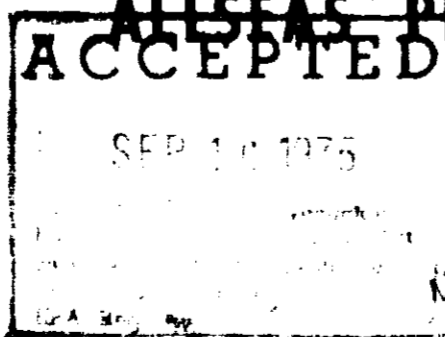

<b>ACTIVE INGREDIENTS*</b>	
Cuprous Oxide	57.92%
Bis (Tributyltin) Oxide	2.21%
<b>INERT INGREDIENTS</b>	<b>59.87%</b>
	100.00%

\*Equivalent to 33.6% Metallic  
Copper and 0.88% Metallic Tin  
BATCH NO.

## DIRECTIONS FOR USE ON STEEL HULLS

Be sure that all surfaces are clean,  
free of moisture, scale, grease or  
oil. Remove all loose paint with  
wire brush or scraper. Mix thor-  
oughly, both by stirring and then  
pouring from one clean container  
to another several times. Stir from  
time to time during application.

Apply one or two coats "as is" on  
ship bottoms by brush or roller. For  
spraying, thin if necessary with  
No. 6 Solvent MD-3717. Do not  
add oil or varnishes to this paint.

Allow four hours between coats.

Anti-Fouling paints must be applied  
over suitable barrier coats and  
should not be applied directly to  
metal. Launching may be accom-  
plished as soon as one hour after  
the final application.

**FOR INDUSTRIAL USE ONLY  
IN COMMERCIAL AND NAVAL  
SHIPYARDS**

MAF 4312 770 B 13 75

A PRODUCT OF

**DEVORE & RAYNOLDS  
COMPANY, INC.**

NEW YORK, N.Y. 10004  
NEW ORLEANS, LA. 70117

**EMERYVILLE, CALIF. 94608**

**WARNING!**

**CONTAINS XYLOL,  
BIS (TRIBUTYLTIN) OXIDE  
AND CUPROUS OXIDE**

DO NOT USE, POUR, SPILL OR  
STORE NEAR HEAT OR OPEN  
FLAME.

Avoid breathing of vapor or spray  
mist.

May be absorbed through skin  
Causes skin irritation.

Avoid contact with skin, eyes or  
clothing.

Avoid storage near food and  
products.

Close container after using. Do  
not reuse empty container; destroy  
by perforating or crushing and  
bury or discard in a safe place.

Do not contaminate water by clean-  
ing of equipment or disposal of  
wastes.

FIRST AID: If swallowed, do NOT  
induce vomiting. CALL A PHYSI-  
CIAN.

In case of skin contact remove con-  
taminated clothing and wash skin  
with soap and water; for eyes,  
flush with plenty of water and get  
medical attention. Wash clothing  
before reuse.


**USE WITH ADEQUATE  
VENTILATION**

# DEVORE MARINE

**PAINTS & COATINGS • WORLD-WIDE**

**DEV-RAN<sup>®</sup> 222**

**ALLSEAS<sup>®</sup> PERMANENT RED ANTI-FOULING PAINT**

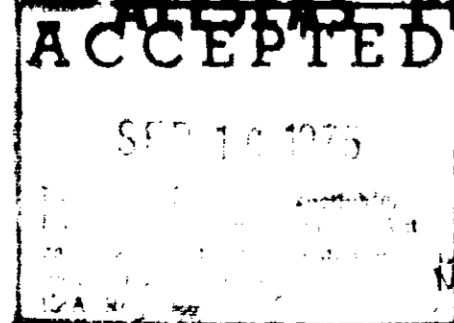

**MD-4312**

**WARNING!**

**KEEP OUT OF REACH OF CHILDREN  
VAPOR HARMFUL — COMBUSTIBLE  
HARMFUL OR FATAL IF SWALLOWED**

Read Carefully Warning on Left Panel

E.P.A. REG. NO. 9461-93

**ACTIVE INGREDIENTS\***  
Cuprous Oxide . . . . 37.92%  
Bis (Tributyltin)  
Oxide . . . . . 2.21%  
**INERT INGREDIENTS . . . . 59.87%**  
100.00%

\*Equivalent to 33.6% Metallic  
Copper and 0.88% Metallic Tin  
BATCH NO.

**5 U. S. GALLONS  
(18.925 LITERS)**

## DIRECTIONS FOR USE ON STEEL HULLS

Be sure that all surfaces are clean,  
free of moisture, scale, grease or  
oil. Remove all loose paint with  
wire brush or scraper. Mix thor-  
oughly, both by stirring and then  
pouring from one clean container  
to another several times. Stir from  
time to time during application.

Apply one or two coats "as is" on  
ship bottoms by brush or roller. For  
spraying, thin if necessary with  
No. 6 Solvent MD-3717. Do not  
add oil or varnishes to this paint.

Allow four hours between coats.

Anti-Fouling paints must be applied  
over suitable barrier coats and  
should not be applied directly to  
metal. Launching may be accom-  
plished as soon as one hour after  
the final application.

**FOR INDUSTRIAL USE ONLY  
IN COMMERCIAL AND NAVAL  
SHIPYARDS**

MAF 4312 770 B 13 75

A PRODUCT OF

**DEVORE & RAYNOLDS  
COMPANY, INC.**

NEW YORK, N.Y. 10004  
NEW ORLEANS, LA. 70117

**EMERYVILLE, CALIF. 94608**