

SAV



COTE

CAUTION

Keep Out of Reach of Children
 May be absorbed through skin. Causes skin irritation. In case of skin contact, remove contaminated clothing and immediately wash skin with soap and water; for eyes immediately flush with plenty of water. If irritation persists get medical attention.
 Do not get in eyes, on skin or on clothing.
 Use on wood, metal or fibreglass.

Manufactured by SAV-COTE LABORATORIES P.O. BOX 770 LAKEWOOD NEW JERSEY

DIRECTIONS

1. Stir colors well.
2. Apply on clean dry surfaces.
3. Apply generously with minimum of brushing. Flow on.
4. Thin down first coat one part thinner to two parts Sav-Cote.
5. When apply two coats full strength.
6. Use Sav-Cote thinner to clean tools.

CAUTION

1. Keep away from open flame and sparks.
2. If applying indoors use plenty of ventilation.
3. Avoid contact with skin and eyes and prolonged breathing of vapors.
4. Keep out of reach of children.
5. If swallowed induce vomiting, call a physician.


THE SAV-COTE DO'S

1. Apply on clean, dry, tight surfaces.
2. For best adhesion wipe down surface first with Sav-Cote Thinner. Follow with light sanding of area to be finished.
3. Primers are not necessary. But if super adhesion is necessary for a specific application use a zinc chromate for aluminum and a wash primer for metal and fibreglass.
4. On all surfaces, it is recommended that the first coat of Sav-Cote be thinned down one part thinner to 2 parts Sav-Cote. The second and following coats can be applied full strength.
5. Stir all colors before application. Only plasticizer does not have to be stirred. If storing partly filled can, secure lid tightly. Sav-Cote can be stored at normal temperatures up to 1 year.
6. Apply by brush, roller or spray gun. If spraying, thin 3 parts Sav-Cote to one part Sav-Cote Special Thinner & Cleaner. Mix thoroughly and


THE SAV-COTE DO NOTS

1. Do not apply Sav-Cote on surfaces FRESHLY painted with oil, rubber, alkyd or synthetic enamel, varnish or lacquer. Apply Sav-Cote ONLY over other finishes which are at least 3 months old.
2. Do not mix Sav-Cote with other finishes. Do not thin Sav-Cote with anything except Sav-Cote Special Thinner & Cleaner.
3. If remover is used under Sav-Cote it must be neutralized. If remover is still active it will retard Sav-Cote from drying quickly. Nevertheless, Sav-Cote will dry and it may take up to one week. Thereafter other Sav-Cote coats can be applied with normal drying speed.
4. Do not apply on very wet, oily, greasy, badly cracked or peeling surface.

- keep gun close to the surface. As many thin coats can be applied as desired. Each coat to be tack free before the next applied.
 7. If rolling use a short nap mohair roller. For brushing 1 to 3 brush size is recommended. Dip brush or roller generously and put on with minimum of passes. Two to five passes is sufficient. Sav-Cote will dry smooth so don't worry about brush marks.
 8. Best day for application outdoors is on a day of low humidity, low wind with temperature between 40 to 85 degrees. Preferably out of direct rays of the sun.
 9. On most surfaces two coats is minimum. On new surfaces and for the ultimate in beauty and durability it is recommended that 3 to 4 coats be applied. The thicker Sav-Cote is the better.
 10. Clean brushes and tools out immediately. Use Sav-Cote thinner.
 11. When Sav-Cote gets dirty use cleaner & terry to bring back the finish.
- CAUTION!! CAUTION!! SAV-COTE IS FLAMMABLE

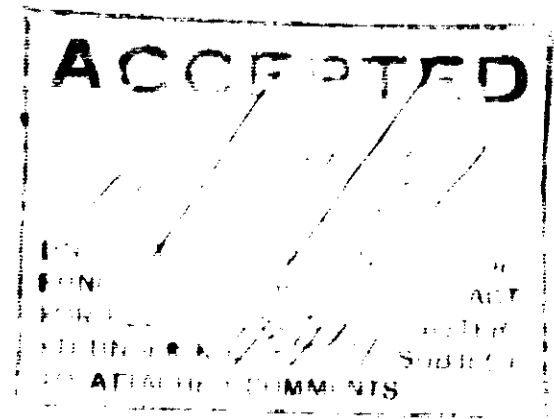

"A SUPERIOR QUALITY LIQUID PLASTIC COATING"

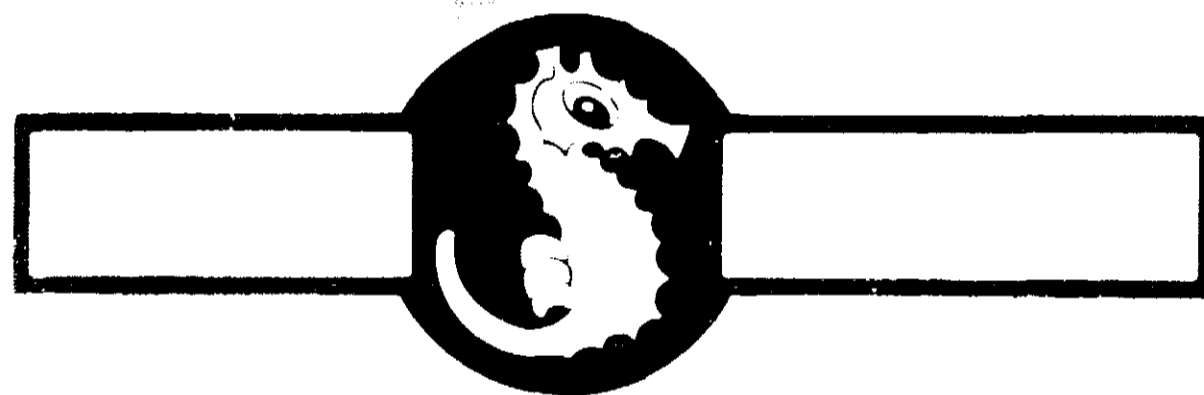

**W A T E R T I G H T
WHITE ANTIFOULING NO-COP**

Important
Stir Continuously While Using
(Use White 2000 as the primer and sealer)

Caution: Flammable, Use with Ventilation

ONE U. S. QUART

| ANTIFOULING WHITE NO-COP Ingredients | |
|--|-------------|
| Bi (tri-n-butyltin) Oxide | 5.5% |
| Vinyl Resin Solids | 20.0% |
| Plasticizer | 3.0% |
| Titanium Dioxide | 2.0% |
| A photo-curable carbon | 59.5% |
| Resin | 3.0% |
| TOTAL | 100% |
| Active Ingredients | |
| Bi (tri-n-butyltin) Oxide | 5.5% |
| Inert Ingredients | 94.5% |
| TOTAL | 100% |

DIRECTIONS

1. Stir colors well.
2. Apply on clean dry surfaces.
3. Apply generously with minimum of brushing, flow on.
4. Thin down first coat, one part thinner to two parts Sav-Cote.
5. Then apply two coats full strength.
6. Use Sav-Cote thinner, to clean tools.

CAUTION

1. Keep away from open flame and sparks.
2. If applying indoors use plenty of ventilation.
3. Avoid contact with skin and eyes, and prolonged breathing of vapors.
4. Keep out of reach of children.
5. If swallowed, induce vomiting, call a physician.

THE SAV-COTE DO NOTS

1. Do not apply Sav-Cote on surfaces FRESHLY painted with an oil, rubber, alkyd or synthetic enamel, varnish or lacquer. Apply Sav-Cote ONLY over other finishes which are at least 3 months old.
2. Do not mix Sav-Cote with other finishes. Do not thin Sav-Cote with anything except Sav-Cote Special Thinner & Cleaner.
3. If remover is used under Sav-Cote it must be neutralized. If remover is still active it will retard Sav-Cote from drying quickly. Nevertheless, Sav-Cote will dry and it may take up to one week. Thereafter other Sav-Cote coats can be applied with normal drying speed.
4. Do not apply on very wet, oily, greasy, badly cracked or peeling surface.

THE SAV-COTE DO'S

1. Apply on clean, dry, tight surfaces.
2. For best adhesion wipe down surface first with Sav-Cote Thinner. Follow with light sanding of area to be finished.
3. Primers are not necessary. But if "super" adhesion is necessary for a specific application use a zinc chromate for aluminum and a wash primer for metal and fiberglass.
4. On all surfaces, it is recommended that the first coat of Sav-Cote be thinned down one part thinner to 2 parts Sav-Cote. The second and following coats can be applied full strength.
5. Stir all colors before application. Only plastic clear does not have to be stirred. If storing partly filled can, secure lid tightly. Sav-Cote can be stored at normal temperatures up to 1 year.
6. Apply by brush, roller or spray gun. If spraying, thin 3 parts Sav-Cote to one part Sav-Cote Special Thinner & Cleaner. Mix thoroughly and

- keep gun close to the surface. As many thin coats can be applied as desired. Each coat to be tack free before the next applied.
 7. If rolling use a short nap mohair roller. For brushing 1" to 3" brush size is recommended. Dip brush or roller generously and put on with minimum of passes. Two to five passes is sufficient. Sav-Cote will dry smooth so don't worry about brush marks.
 8. Best day for application outdoors is on a day of low humidity, low wind with temperature between 40 to 85 degrees. Preferably out of direct rays of the sun.
 9. On most surfaces two coats is minimum. On new surfaces and for the ultimate in beauty and durability it is recommended that 3 to 4 coats be applied. The thicker Sav-Cote is the better.
 10. Clean brushes and tools out immediately. Use Sav-Cote thinner.
 11. When Sav-Cote gets dirty use cleanser & brillo to bring back the finish.
- CAUTION!! CAUTION!! SAV-COTE IS FLAMMABLE**

Manufactured by SAV-COTE LABORATORIES, P.O. BOX 770, LAKEWOOD, NEW JERSEY