

CRYSTAL-AQUA algaecide is efficient, economical and stable in use dilution. CRYSTAL-AQUA is compatible with all chemicals used in pool water and will not damage tile, concrete, metal, or plastics.

CRYSTAL-AQUA keeps pool water free and sparkling, clear of visible algae, slime and green brown colors.

CRYSTAL-AQUA improves filter operation and cuts down need for other chemicals.

CRYSTAL-AQUA imparts tone and a pleasant "feel" to swimming pool water.


EPA Reg. No. 9613-5

Do not reuse container. Destroy when empty.

This product is toxic to fish. Treated effluent should not be discharged where it will drain into lakes, streams, ponds or public water.

Apply this product only as specified on this label.

# CRYSTAL-AQUA

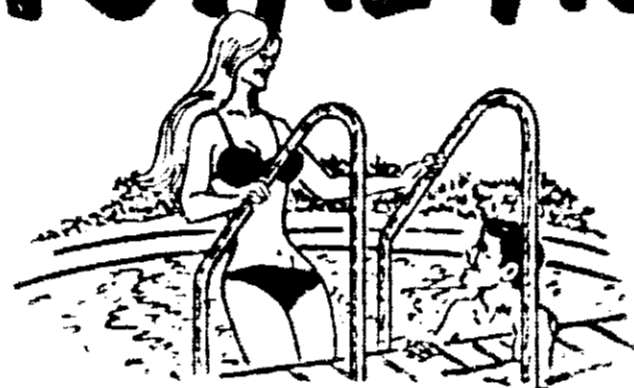

SWIMMING POOL

# ALGAECIDE

## OUTSTANDING ALGAE GROWTH DEPRESSANT

ACTIVE INGREDIENT:  
 Alkyl\* Dimethyl Benzyl Ammonium Chloride  
 \*(C<sub>12</sub>, 60%; C<sub>11</sub>, 25%; C<sub>10</sub>, 15%).... 10%  
 INERT INGREDIENTS: ..... 90%  
 100%



Manufactured by  
 BISON LABORATORIES, INC. BUFFALO, N. Y. 14211

**NET CONT. 128 OZ. (1 GALLON)**

### DANGER

#### KEEP OUT OF REACH OF CHILDREN

Corrosive. Causes severe eye and skin damage. Do not get in eyes, on skin or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful or fatal if swallowed. Avoid contamination of food.

SEE ANTIDOTE AND PRECAUTION ON SIDE PANEL.

### DIRECTIONS

Initial Application: To a cleaned pool add one gallon to 50,000 gallons of water, or ratio thereof.

Maintenance Dose: Use one quart per 50,000 gallons of water every 5 to 7 days. When weather is hot or bathing load is heavy, use this dosage every 5 days or as necessary.

Booster Dose: Immediately after every rain add one quart per 50,000 gallons of water as above.

Important: Follow above directions without fail, even when pool is not used. Algae growth must be fought at all times.


Pool-side surfaces: To scrub pool-side surfaces, use one oz. to four gallons of water for sanitizing, or one oz. to two gallons of water for disinfecting.

### FIRST AID

In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, call a physician. Remove and wash contaminated clothing before reuse. If swallowed, drink promptly a large quantity of milk, egg whites, gelatin solution; or if these are not available, drink large quantities of water. Avoid alcohol. Call a physician immediately.

### NOTE TO PHYSICIAN:

Possible mucosal damage may contraindicate the use of gastric lavage. Measure against circulatory shock as well as oxygen and medicines to support breathing manually or mechanically may be needed.

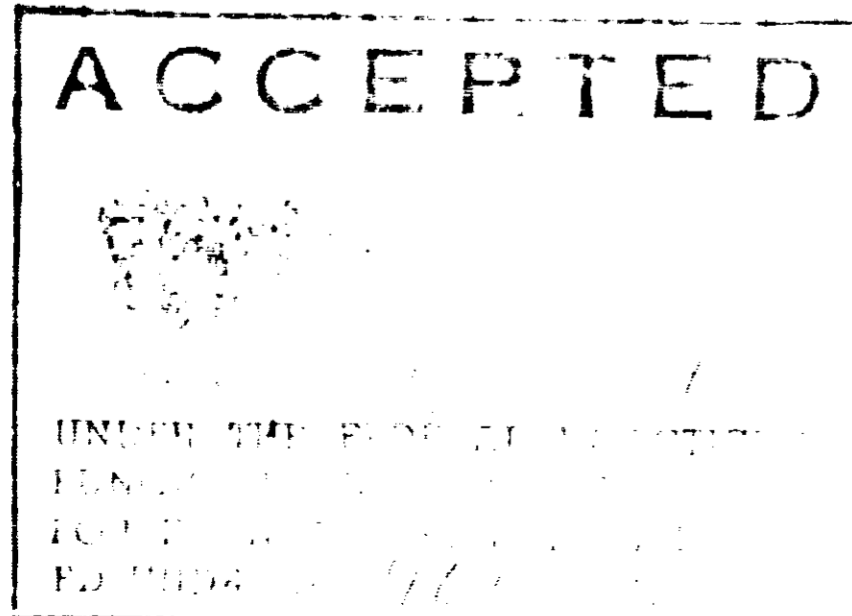

MIL-P-19149B Formula No. 146/50

ACTIVE INGREDIENTS

Cuprous Oxide	28.4%
Mercuric Oxide	3.7%

INERT INGREDIENTS

Gum Rosin	23.4%
Blown Fish Oil	10.0%
Zinc Stearate	1.7%
Xylene	22.2%
Magnesium Silicate	4.7%
Lampblack	5.9%
Total	100.0%

ANTIDOTE

12 Point

Give milk and white of egg beaten with water, then a tablespoon of salt in glass of warm water. If contact is made in eyes, flush with warm water. CALL A PHYSICIAN.

MAY BE FATAL IF SWALLOWED

12 Point

Do not breathe vapor. Do not get in eyes, on skin, or on clothing. Wash thoroughly after handling.

CAUTION COMBUSTIBLE

12 Point

Keep away from heat, sparks, and open flame. Use adequate ventilation. Do not smoke while painting.

Directions and Intended Use. Formula No. 146/50 black anti-fouling paint, is intended for use on flap bottom exterior and boottopping (waterline) surfaces. It should be used alone or preferably over primer, pretreatment (Formula 147, MIL-P-1427) on wood or plastic and additionally over anticorrosive primer (Formula 148, MIL-P-19143) on metal surfaces. See current of Ships Technical Manual Chapter 9190 for instructions on proper application methods.

Md. B,  
WILLIAM ARMSTRONG SMITH CO.  
EAST POINT, GEORGIA

and wholly owned subsidiary company  
RELIANCE CHEMICAL COMPANY  
RICHMOND, CALIFORNIA

