

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

CAUTION

Harmful if swallowed or absorbed through skin. Do not get in eyes, on skin or on clothing. Wash thoroughly after handling. Avoid breathing vapor or spray mist use in a well ventilated area. If swallowed, Do not induce vomiting, CALL PHYSICIAN IMMEDIATELY. — IF ABSORBED THROUGH SKIN, Wash thoroughly with soap and water. — IF IN EYES, Flush with plenty of water and get immediate medical attention. — CONTAMINATED CLOTHING should be removed and washed thoroughly before reusing.

ENVIRONMENTAL HAZARDS

This product is toxic to fish. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes. Apply this product only as specified on the label.

Although copper is an essential nutrient for soil and although copper naphthenate applied to soil or plant outside may have a beneficial effect in certain circumstances, large amounts of this product sprayed or otherwise applied to certain plants may cause plant injury.

PHYSICAL OR CHEMICAL HAZARDS

Use only with adequate ventilation. Close container after each use.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

STORAGE AND DISPOSAL

Do not use empty container. Wrap container and put into trash collection.

2% COPPER HYDRO-NAP

**WOOD
PRESERVATIVE**

ACTIVE INGREDIENT:	
(Copper, as metal, 2%)	
Copper naphthenate.....	19.3%
INERT INGREDIENTS.....	80.7%
TOTAL	100.0%

Product weight per gallon: 8.3 lbs.

**PROTECTS WOOD
IN CONTACT WITH SOIL & WATER**

**PROTECTS AGAINST WOOD ROT, TERMITE
DAMAGE, MILDEW AND MOISTURE**


KEEP OUT OF REACH OF CHILDREN

CAUTION

See other precautionary statements on back panel.

MOONEY CHEMICALS, INC.

2301 Scranton Road
Cleveland, Ohio 44113

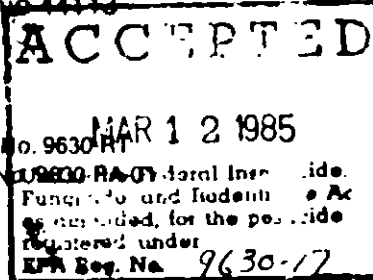

**ONE U.S. GALLON
(3.785 LITERS)
NET**

2% COPPER HYDRO-NAP WOOD PRESERVATIVE WOOD SURFACES IN CONTACT WITH SOIL, CONCRETE OR WATER INCLUDING FOUNDATIONS—SILLS—DOCKS—BOATS—FENCEPOSTS..... contact surfaces

2% Copper Hydro-Nap is only intended for use on exterior wood. Do not apply to food or feed. Do not contaminate drinking water with treated articles.

2% Copper Hydro-Nap Wood Preservative provides protection against moisture, rot and mildew on any natural wood surface. This copper naphthenate wood preservative and insecticide will preserve, protect and seal wood surfaces that will be in contact with soil, water or concrete.

The copper fungicide gives a green cast to 2% Copper Hydro-Nap Wood Preservative. This product is not intended for use as a stain. The green color will fade within a few months when exposed to sunlight. Oil or alkyl stains or paints can be applied over 2% Copper Hydro-Nap Preservative after overnight dry but the green may bleed through lighter colors. Do not over coat 2% Copper Hydro-Nap Wood Preservative with latex paint or clear finishes until thoroughly cured (6 to 12 months).

PREPARATION

Wood should be clean, dry, well seasoned and free of bark.

PROTECT FROM FREEZING

APPLICATION

2% Copper Hydro-Nap Wood Preservative should be applied liberally by brush, roller, spray or dipping in a container.

Dipping wood should be dipped for 3 to 30 minutes per inch of thickness. Fence posts, poles, foundation timbers and heavy wooden members should be immersed in the product for 12 to 48 hours.

Do not thin — Materials supplied at proper application consistency.

Use one coat on materials to be finished with paint or stain.

If no finish is to be used, apply two liberal coats within the hour. Thoroughly cover ends. The more preservative absorbed by the wood, the longer and more effective the protection.

Clean painting equipment with mineral spirits for quick cleanup.

NOTE TO USER

Do not apply over painted or varnished surfaces. Do not apply over bark.

COVERAGE

100-300 square feet — Depending on porosity of wood and method of application.