

ACCEPTED
MAR 06 1990
Under the Federal
Rodenticide Act,
perm. No. 9639-16

ZINC TREAT - Label - Front Panel

ZINC TREAT

WOOD PRESERVATIVE

FOR USE WHEREVER WOOD MEETS WATER OR SOIL

COLORLESS

HEAVY DUTY

WATER-REPELLANT

CONTROLS WARPING & SWELLING

PREVENTS DETERIORATION CAUSED BY
TERMITES - FUNGUS - ROT - DECAY

COMBUSTIBLE: CONTAINS PETROLEUM DISTILLATES
WARNING: KEEP OUT OF REACH OF CHILDREN

SEE SIDE PANELS FOR ADDITIONAL PRECAUTIONARY STATEMENTS

ACTIVE INGREDIENTS:

*ZINC NAPHTHENATE	23.6%
INERT INGREDIENTS	76.4%
	100%

*Zinc computed as elemental 3%

V.O.C. = 338 GRAMS PER LITER

LUX CHEMICAL CORPORATION
REDWOOD CITY, CALIFORNIA 94064
U.S. EPA. NO. 9635-CA-001

WILLARD PRODUCTS DIVISION
(415) 365-3300
EPA REG. NO. 9639-16

CONTENTS: 5 GALLONS

9550

ZINC TREAT - LABEL - SIDE (BACK) PANELS

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

Harmful if swallowed or absorbed through skin. Do not get in eyes, on skin or on clothing. Avoid breathing vapor or spray mist. Wash thoroughly with soap and water after handling. Contaminated clothing should be removed and washed thoroughly before reusing. Use in a well ventilated area.

WARNING

FIRST AID PROCEDURE

HARMFUL OR FATAL IF SWALLOWED

STATEMENT OF PRACTICAL TREATMENT

- IF IN EYES: Immediately flush with a large quantity of water and get medical attention.
- IF ON SKIN: Wash thoroughly with plenty of soap and water. Get medical attention if irritation persists.
- IF INHALED: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.
- IF SWALLOWED: Do not induce vomiting. CALL A PHYSICIAN IMMEDIATELY.

ENVIRONMENTAL HAZARDS

This product is toxic to fish. Do not apply directly to water or wetlands. Do not contaminate water when disposing of equipment wash waters. Apply this product only as specified on the label.

PHYSICAL OR CHEMICAL HAZARDS

Do not use, pour, spill or store near heat or open flame. Use only with adequate ventilation. Close container after each use.

STORAGE AND DISPOSAL

STORAGE: Store in a secure, well ventilated area, protected from extreme temperatures. If the product has been spilled or is leaking, remove the source of the spill or leak. Recover free liquid. Spread absorbent, then pick up and place in containers. Then, where applicable, wash area with detergent and water. Store product in the original container only. Do not contaminate water, food or feed by storage or disposal. Keep container

closed when not in use.

PESTICIDE DISPOSAL: Pesticide wastes are toxic. Improper disposal of excess pesticides, spray mixture, or rinsate is a violation of federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste Representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

COVERAGE

Estimate 150 to 200 sq. ft. per gallon for brush coat, or 5 to 10 gallons per 1000 board feet for dipping dimensional lumber.

RECOMMENDED FOR

ZINC TREAT is a colorless, easy to use wood preservative for above ground, ground contact and below ground uses: e.g. foundations, sills, planter boxes, fence posts, subflooring, docks, boats, lawn furniture and decks. For use wherever wood meets soil or water, and a clear finish is desired. Should not be applied to food or feed contact surfaces.

In addition to preventing fungal rot and decay, blue stain and insect attack on natural wood surfaces, this preservative controls the warping, swelling, shrinking and end-checking caused by changes in moisture content of lumber and other wood products.

Wood to be protected against subterranean termites should be treated before use in construction. Termites will not attack wood treated with ZINC TREAT Wood Preservative.

RECOMMENDED FOR USE ON EXTERIOR WOOD ONLY.

DIRECTIONS FOR USE

It is a violation of federal law to use this product in a manner inconsistent with its labelling.

Wood to be treated should be dry and well seasoned before treatment with ZINC TREAT. Lumber and wood products should be dip treated for at least 3 minutes per inch of thickness. If dipping is not possible, treat with several flowing coats by brush or spray. The more ZINC TREAT the wood absorbs, the better it will be protected. Do not try to extend the coverage.

Fence posts and heavy timbers should be free from bark, dry and well seasoned - and should be immersed in ZINC TREAT for 12 to 48 hours to give effective control for wood destroying pests.

Apply prior to use in construction. Ends or edges cut or bored after initial treatment should be brushed or sprayed with ZINC TREAT. Do not install treated articles until thoroughly dry.

Use one coat on materials to be finished with paint. Oil or alkyd paints can be applied over ZINC TREAT Wood Preservative after thorough drying (about 48 hours).


If no finish is to be used, apply two liberal coats within the hour. Thoroughly cover the ends. The more preservative absorbed into the wood, the longer and more effective the protection.

This product is not intended for use as a stain or finish. ZINC TREAT may accelerate the natural graying process in some woods.

This product is supplied at proper application consistency and is to be applied without thinning or diluting under normal environmental and application conditions. Brushes and other application equipment may be cleaned with paint thinner (mineral spirits).

W
E
S
T
S
E
A
S
T

10F4
PM 21
9639-16

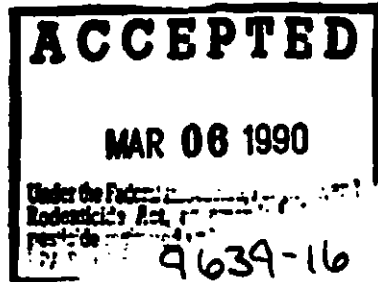

ZINC TREAT - Label - Front Panel

ZINC TREAT

WOOD PRESERVATIVE

FOR USE WHEREVER WOOD MEETS WATER OR SOIL

COLORLESS

HEAVY DUTY

WATER-REPELLANT

CONTROLS WARPING & SWELLING

PREVENTS DETERIORATION CAUSED BY
TERMITES - FUNGUS - ROT - DECAY

COMBUSTIBLE; CONTAINS PETROLEUM DISTILLATES
WARNING; KEEP OUT OF REACH OF CHILDREN

SEE SIDE PANELS FOR ADDITIONAL PRECAUTIONARY STATEMENTS

ACTIVE INGREDIENTS:

*ZINC NAPHTHENATE	23.6%
INERT INGREDIENTS	76.4%
	100%


*Zinc computed as elemental 3%

V.O.C. = 338 GRAMS PER LITER

LUX CHEMICAL CORPORATION
REDWOOD CITY, CALIFORNIA 94064
U.S. EPA. NO. 9639-CA-001

WILLARD PRODUCTS DIVISION
(415) 365-3300
EPA REG. NO. 9639-16

CONTENTS: 5 GALLONS

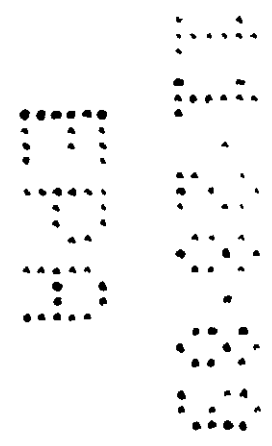

ZINC TREAT - LABEL - SIDE (BACK) PANELS

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

Harmful if swallowed or absorbed through skin. Do not get in eyes, on skin or on clothing. Avoid breathing vapor or spray mist. Wash thoroughly with soap and water after handling. Contaminated clothing should be removed and washed thoroughly before reusing. Use in a well ventilated area.

WARNING

FIRST AID PROCEDURE

HARMFUL OR FATAL IF SWALLOWED

STATEMENT OF PRACTICAL TREATMENT

- IF IN EYES: Immediately flush with a large quantity of water and get medical attention.
- IF ON SKIN: Wash thoroughly with plenty of soap and water. Get medical attention if irritation persists.
- IF INHALED: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.
- IF SWALLOWED: Do not induce vomiting. CALL A PHYSICIAN IMMEDIATELY.

ENVIRONMENTAL HAZARDS

This product is toxic to fish. Do not apply directly to water or wetlands. Do not contaminate water when disposing of equipment wash waters. Apply this product only as specified on the label.

PHYSICAL OR CHEMICAL HAZARDS

Do not use, pour, spill or store near heat or open flame. Use only with adequate ventilation. Close container after each use.

STORAGE AND DISPOSAL

STORAGE: Store in a secure, well ventilated area, protected from extreme temperatures. If the product has been spilled or is leaking, remove the source of the spill or leak. Recover free liquid. Spread absorbent, then pick up and place in containers. Then, where applicable, wash area with detergent and water. Store product in the original container only. Do not contaminate water, food or feed by storage or disposal. Keep container

closed when not in use.

PESTICIDE DISPOSAL: Pesticide wastes are toxic. Improper disposal of excess pesticides, spray mixture, or rinsate is a violation of federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste Representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

COVERAGE

Estimate 150 to 200 sq. ft. per gallon for brush coat, or 5 to 10 gallons per 1000 board feet for dipping dimensional lumber.

RECOMMENDED FOR

ZINC TREAT is a colorless, easy to use wood preservative for above ground, ground contact and below ground uses: e.g. foundations, sills, planter boxes, fence posts, subflooring, docks, boats, lawn furniture and decks. For use wherever wood meets soil or water, and a clear finish is desired. Should not be applied to food or feed contact surfaces.

In addition to preventing fungal rot and decay, blue stain and insect attack on natural wood surfaces, this preservative controls the warping, swelling, shrinking and end-checking caused by changes in moisture content of lumber and other wood products.

Wood to be protected against subterranean termites should be treated before use in construction. Termites will not attack wood treated with ZINC TREAT Wood Preservative.

RECOMMENDED FOR USE ON EXTERIOR WOOD ONLY.

DIRECTIONS FOR USE

It is a violation of federal law to use this product in a manner inconsistent with its labelling.

Wood to be treated should be dry and well seasoned before treatment with ZINC TREAT. Lumber and wood products should be dip treated for at least 3 minutes per inch of thickness. If dipping is not possible, treat with several flowing coats by brush or spray. The more ZINC TREAT the wood absorbs, the better it will be protected. Do not try to extend the coverage.

Fence posts and heavy timbers should be free from bark, dry and well seasoned - and should be immersed in ZINC TREAT for 12 to 48 hours to give effective control for wood destroying pests.

Apply prior to use in construction. Ends or edges cut or bored after initial treatment should be brushed or sprayed with ZINC TREAT. Do not install treated articles until thoroughly dry.

Use one coat on materials to be finished with paint. Oil or alkyd paints can be applied over ZINC TREAT Wood Preservative after thorough drying (about 48 hours).

If no finish is to be used, apply two liberal coats within the hour. Thoroughly cover the ends. The more preservative absorbed into the wood, the longer and more effective the protection.

This product is not intended for use as a stain or finish. ZINC TREAT may accelerate the natural graying process in some woods.

This product is supplied at proper application consistency and is to be applied without thinning or diluting under normal environmental and application conditions. Brushes and other application equipment may be cleaned with paint thinner (mineral spirits).

