

**DIRECTIONS FOR USE**

**For General Disinfection, Sanitization, and Deodorant Use:**

**Walls, floors, woodwork, and other hard surfaces** - Remove gross filth and heavy soil deposits with AIR-TITE 772, ½ ounce for each gallon of water. After rinsing, soak or thoroughly wet surfaces for 10 minutes with a fresh solution of 2½ ounces of AIR-TITE 772 in each gallon of water. Rinse treated surfaces thoroughly with water prior to use.

**Autopsy, necropsy, and slaughter house instruments, tools, and associated metal equipment, cages, refuse cans or trucks** - Scrub or otherwise remove gross debris and filth with a solution of ½ ounce of AIR-TITE 772 in each gallon of water; then soak or thoroughly wet surfaces for 10 minutes in a solution of 2½ ounces of AIR-TITE 772 in 1 gallon of water. Rinse with clean water before using.

**Food contact surfaces** - Remove filth and heavy soil by a preliminary scrubbing or mopping with a solution of ½ ounce of AIR-TITE 772 in each gallon of water. After rinsing, soak or thoroughly wet surfaces for 10 minutes in a fresh solution of 2½ ounces of AIR-TITE 772 in each gallon of water. Scrub treated food contact surfaces with a detergent and rinse with potable water prior to reuse.

**For Odor Control**

**Recirculating toilets and sewerage-holding systems** - To inhibit the growth of odor producing bacteria in human wastes, add 4 ounces of AIR-TITE 772 for each 10 gallons capacity. For maximum effect, the solution should be replaced every two weeks.

**Kennels** - To control odors from urine and feces by inhibiting the growth of odor producing bacteria, use 4 ounces of AIR-TITE 772 to each 10 gallons of holding tank capacity. For maximum effect, the system should be flushed and recharged every two weeks. For sanitizing and deodorizing kennel runs, floors, walls and other surfaces where urine, feces and other sources of odor occur, remove gross filth and thoroughly wet surfaces with a solution of ½ ounce of AIR-TITE 772 in a gallon of water.

**Slaughterhouses, rendering plants** - To chemically destroy, neutralize or mask odors, use 4 ounces of AIR-TITE 772 per 10 gallons of water and frequently saturate areas where odor causing bacteria collect. For best results, remove gross filth and follow by scrubbing and thoroughly wetting the area with a solution of ½ ounce of AIR-TITE 772 per gallon of water.

**Disinfectant Action** - When used as directed, AIR-TITE 772 is effective against *Escherichia coli*, *Staphylococcus aureus*, *Pseudomonas aeruginosa*, *Salmonella typhosa*, and *Salmonella choleraesuis*. Phenol coefficient data obtained by A.O.A.C. procedure follows.

| Organism                       | Phenol Coefficient |
|--------------------------------|--------------------|
| <i>Escherichia coli</i>        | 4.3                |
| <i>Staphylococcus aureus</i>   | 6.1                |
| <i>Pseudomonas aeruginosa</i>  | 0.8                |
| <i>Salmonella typhosa</i>      | 4.1                |
| <i>Salmonella choleraesuis</i> | 3.8                |

# AIR-TITE 772

disinfectant, germicide, deodorant

A multi-purpose liquid disinfectant, sanitizer, and deodorant.

**CONTENTS:**

**Active Ingredients:**

- n-alkyl (61% C<sub>12</sub>, 23% C<sub>14</sub>, 11% C<sub>16</sub>, 3% C<sub>10</sub>, 2% C<sub>8</sub>) dimethyl benzyl-ammonium chlorides ..... 10.0%
- essential oils ..... 5.0%
- Inert Ingredients** ..... 85.0%

**DANGER: Keep out of Reach of Children**

See first aid and other precautions on right hand panel

Net Contents \_\_\_\_\_

U.S. and Foreign Patents Applied For

Manufactured By:

**AIR-TITE PRODUCTS COMPANY, Inc.**

1483 Washington Avenue  
Vineland, N. J. 08360 U.S.A.

EPA Reg. No. 9854-2

FOR U

**DANG**  
damag  
clothin  
lowed.

for an  
allow r

**FIRST**  
with p  
physici

If s  
whites,  
quantit

**NOTE**  
indicat  
shock,

# AIR-TITE 772

disinfectant, germicide, deodorant

A multi-purpose liquid disinfectant, sanitizer and deodorant.

### CONTENTS:

#### Active Ingredients:

|  |              |
|--|--------------|
| n-alkyl (61% C <sub>12</sub> , 23% C <sub>14</sub> , 11% C <sub>16</sub> , 3% C <sub>10</sub> , 2% C <sub>8</sub> ) dimethyl benzyl-ammonium chlorides ..... | 10.0%        |
| essential oils .....   | 5.0%         |
| <b>Inert Ingredients</b> .....   | <b>85.0%</b> |

#### DANGER: Keep out of Reach of Children

See first aid and other precautions on right hand panel

Net Contents \_\_\_\_\_

U.S. and Foreign Patents Applied For

Manufactured By:

**AIR-TITE PRODUCTS COMPANY, Inc.**


1483 Washington Avenue  
Vineland, N. J. 08360 U.S.A.

EPA Reg. No. 9854-2

AIR-TITE 772  
disinfectant, germicide, deodorant

FOR USE IN

- RESTAURANTS
- KITCHENS
- FOOD PROCESSING PLANTS
- REFUSE CARS AND TRUCKS
- RECIRCULATING TOILETS
- SLAUGHTERHOUSES
- RENDERING PLANTS

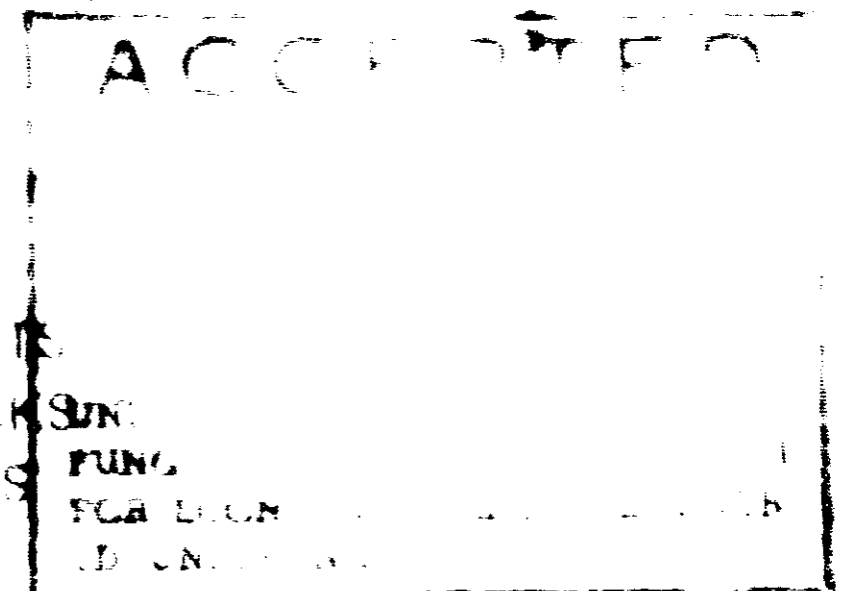

**DANGER:** Keep out of reach of children. Corrosive. Causes eye damage and skin irritation. Do not get in eyes, on skin, or on clothing. Protect eyes and skin when handling. Harmful if swallowed. Avoid contamination of food. Do not re-use container for any purpose - rinse thoroughly before discarding. Do not allow rinse water to contaminate any water source.

**FIRST AID:** In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, call a physician. Remove and wash contaminated clothing before reuse.

If swallowed, drink promptly a large quantity of milk, egg whites, gelatin solution or if these are not available, drink large quantities of water. Call a physician immediately.

**NOTE TO PHYSICIAN:** Probable mucosal damage may contraindicate the use of gastric lavage. Measures against circulatory shock, respiratory depression and convulsion may be needed.

th and heavy soil deposits  
rnsing, soak or thoroughly  
of AIR-TITE 772 in each  
r to use.

ociated metal equipment,  
debris and filth with a so-  
n soak or thoroughly wet  
772 in 1 gallon of water.

ary scrubbing or mopping  
water. After rinsing, soak  
f 2½ ounces of AIR-TITE  
aces with a detergent and

the growth of odor pro-  
772 for each 10 gallons  
ery two weeks.

the growth of odor pro-  
s of holding tank capacity.  
ged every two weeks. For  
surfaces where urine, feces  
ughly wet surfaces with a

ralize or mask odors, use 4  
/ saturate areas where odor  
id follow by scrubbing and  
TE 772 per gallon of water.  
ffective against *Escherichia*  
*lla typhosa*, and *Salmonella*  
edure follows.

Coefficient

3  
1  
8  
1  
8