


Mobil

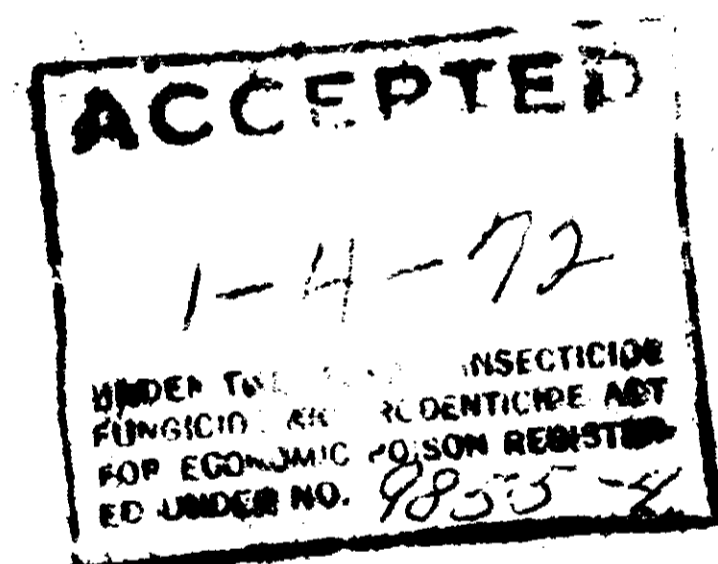


Socopol Vinyl Anti-Fouling 69-D-1

**WARNING! KEEP OUT OF REACH OF CHILDREN.
FLAMMABLE. HARMFUL OR FATAL
IF SWALLOWED. VAPOR HARMFUL**

See back panel for additional cautions (FS-2)

USDA REGISTRATION No. 9855-4

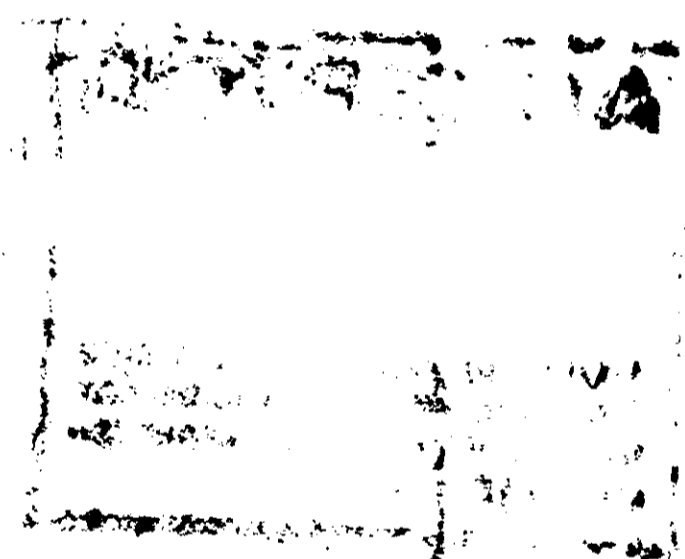

SOCOPOL VINYL ANTI-FOULING 69-D-1 PIGMENT 52.4%

*Copper Pigment	49.5%
Carbon Black	2.1%
Silicate	.7%

VEHICLE 47.6%

Rosin	12.8%
Vinyl Resin	3.5%
Plasticizer	3.4%
Xylol	13.2%
Ketones	14.2%
Alcohol	.5%

100.0%

ANTI-FOULING INGREDIENTS

ACTIVE INGREDIENTS

*Cuprous Oxide	42.1%
*Metallic Copper	5.0%

INERT INGREDIENTS

52.9%

9-28-70	100.0%
Total Copper Calculated As Metallic	42.4%

NET 1 GALLON

ANTI-FOULING PAINT FOR METAL BOTTOMS: Application of two coats is recommended for best performance.

SURFACE PREPARATION: Surfaces must be dry, clean, and free of grease, oil, rust and loose paint. Steel must be coated with suitable primer, or anti-corrosive barrier coats before application of anti-fouling.

MIXING: Before use power mix or box the paint until the product is uniform. Stir the paint at intervals during application to maintain uniformity.

APPLICATION: Apply by brush, spray or roller. Do not paint in cold or damp weather.

THINNING: Thin slightly with 52-T-81 Socopol Thinner when required for application. Use 52-T-81 Socopol Thinner for clean-up.

COVERAGE: A 2 mil dry film will be obtained at a theoretical spreading rate of 345-375 square feet per gallon, depending on the specific product used. Actual coverage will be less due to application techniques, climatic conditions and condition of surface.

DRY TIME: At 70°F. and 50% R.H., allow at least 4 hour dry time between coats, and a minimum of 8 hours before refloating. ML-115 5-71

WARNING! HARMFUL IF SWALLOWED. VAPOR HARMFUL.

FLAMMABLE! CONTAINS XYLOL, KETONES, AND COPPER COMPOUNDS.

Do not take internally. If swallowed, do not induce vomiting. CALL PHYSICIAN. Do not apply on any interior surfaces of a dwelling or a place used for the care of children or on window sills, toys, cribs or other furniture which may be used by children. Keep away from heat, sparks and open flame. Avoid contact with skin and breathing of vapor or spray mist. When applying in closed areas use air supplied hood respirators to avoid breathing concentrated vapors. Wash thoroughly before eating or smoking. Close container after each use. (CCD-69A)

**USE WITH ADEQUATE VENTILATION.
KEEP OUT OF THE REACH OF CHILDREN.**

Mobil Chemical Company

MAINTENANCE & MARINE COATINGS DEPARTMENT
EDISON, N. J. 08817/BEAUMONT, TEX. 77704/KANKAKEE, ILL. 60901/LOS ANGELES, CALIF. 90058

780-1X

780-1X

MALDEN

Shipbottom Tropical Series Anti-Fouling 59

ACCEPTED

March 24, 1975

UNDER THE FEDERAL INSECTICIDE, FUNGICIDE AND RODENTICIDE ACT FOR ECONOMIC PESTICIDE REGISTRATION UNDER NO. 9855-5. SUBJECT TO ATTACHED COMMENTS.

WARNING! See caution on label.

NOTICE: THIS PRODUCT IS FOR INDUSTRIAL USE (FR-1) AND IS NOT INTENDED OR TO BE USED IN OR AROUND A HOUSEHOLD.

EPA Reg. No. 9855-5