

2%	27.3%
ss II	3.0%
	8.1%
	7.5%
	7.5%
8%	16.5%
	6.3%
late	9.9%
arbons	14.1%
	100.0%
<b>INGREDIENTS</b>	
NTS	20.3%
TS	79.7%
13-75	100.0%

**ANTI-FOULING PAINT FOR METAL BOTTOMS:**  
Application of two coats is recommended for best performance.

**Surface Preparation:** Surfaces must be dry, clean, and free of dirt, dust, grease, oil, rust, loose paint and other contaminants. Steel must be coated with suitable primer, or anti-corrosive barrier coats before application of anti-fouling.

**Mixing:** Before use, power mix or box the paint until the product is uniform. Stir the paint at intervals during application to maintain uniformity.

**Application:** Apply by brush, spray, or roller. Do not paint in cold or damp weather.

**Thinning:** Thin slightly when required for application with Thinner 7-T-38 for brush or roller work, or Thinner 7-T-39 for spray.

**Coverage:** Theoretical coverage is 425 sq. ft./gal. for a 2 mil dry film. Actual coverage will be less depending upon application techniques, job conditions, and condition of surface.

**Dry Time:** At 70°F. and 50% R.H., allow at least 2 hour dry time between coats, and a minimum of 4 hours before refloating.

**Safety:** When applied in confined areas, provide forced fresh air ventilation. Use fresh air masks and explosion-proof and non-sparking equipment.

**Caution:** Do not reuse container. Destroy and properly discard when empty. Do not contaminate water by cleaning of equipment, or disposal of wastes. ML-107 7-74

**CONTAINS — ORGANIC SOLVENT**

**WARNING!**

VAPOUR HARMFUL  
CAUSES IRRITATION  
DANGEROUS TO LIFE (< 200° F/100°)

Avoid breathing vapor.  
Avoid contact with eyes, skin, and clothing.  
Keep away from heat and open flame.  
Wash thoroughly after handling.

Use with adequate ventilation.  
Wear an air supplied mask to avoid breathing concentrated vapors in enclosed areas.  
Keep container closed.

**FIRST AID:** If inhaled, remove to fresh air. If not breathing give artificial respiration, preferably mouth-to-mouth. Call a physician.

In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Call a physician. (ECL-42 4-73)

**Mobil Chemical Company**

MAINTENANCE & MARINE COATINGS DEPARTMENT

EDISON, N. J. 07030

750-1X

FWW

# Mobil®


## Maintaining Good Conditions

**ACCEPTED**  
 MAR 24 1975  
 Under the Federal Insecticide, Fungicide, and Rodenticide Act, the above product has been registered under EPA Reg. No. 9855-6

### Shipbottom Paint Anti-Fouling 59-R-90

Pigment	48.3%
Copper Pigment	14.9%
Zinc Oxide	8.2%
Iron Oxide, Class II	6.9%
Silicates	14.2%
Silica	4.1%
Vehicle	51.7%
Rosin	18.1%
Coal Tar	8.2%
Aromatic Hydrocarbon	15.3%
Aliphatic Hydrocarbon	9.9%
Alcohol	.2%
	100.0%

**WARNING!** See caution elsewhere on label. (FR-6)

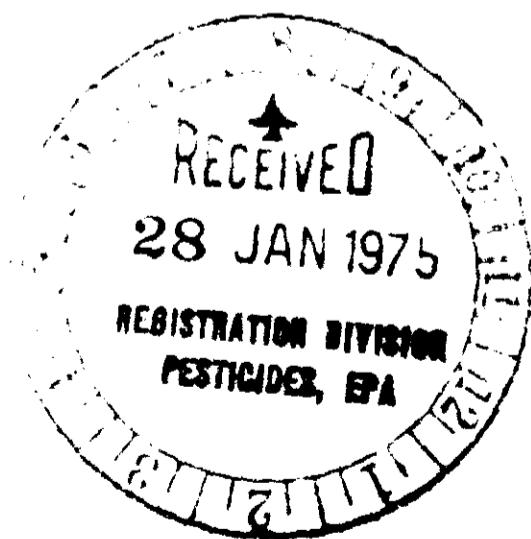

**NOTICE:** THIS PRODUCT IS FOR INDUSTRIAL USE ONLY (FR-1) AND IS NOT INTENDED OR SUITABLE FOR USE IN OR AROUND A HOUSEHOLD OR DWELLING.

ANTI-FOULING INGREDIENTS		
ACTIVE INGREDIENTS		
Cuprous Oxide		11.2%
INERT INGREDIENTS		
59-R-90	1-13-75	100.0%

EPA Reg. No. 9855-6

EPA Est. 9855-NJ-1

NET 1 GALLON