

Mobil[®] Marine Coating

Shipbottom Paint
Tropical Super Service
Anti-Fouling 59-D-1

ENVIRONMENTAL HAZARDS: This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

PHYSICAL OR CHEMICAL HAZARDS: Flammable. Keep away from heat and open flame.

DIRECTIONS FOR USE: It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

ANTI-FOULING PAINT FOR METAL BOTTOMS: To control the attachment of marine fouling, i.e., barnacles, grass, algae, etc., on steel bottoms in salt and brackish water which would sustain such growth. Not recommended for use on aluminum. A minimum of two coats is recommended for best performance.

Surface Preparation: Before application of anti-fouling, all surfaces must be dry and cleaned of dirt, dust, oil, rust, loose paint, salt residues, and other contaminants. Steel must be coated with a suitable primer or anti-corrosive barrier coats. Before use, power mix or box the paint until product is uniform. Stir the paint at intervals during application to maintain uniformity.

Application: Apply by brush, roller or spray. Do not paint in cold or damp weather.

Thinning: Where needed for workability, thin slightly with Thinner 7-T-18 for brush or roller; Thinner 7-T-19 for spray. Use same Thinner for clean-up.

Coverage: Apply at a rate that will provide a 2 mil dry film per coat, theoretically 425 sq. ft. per gallon. Actual coverage will vary depending upon application technique, job conditions and type of surface.

Dry Time: At 75°F and 50% R.H., allow at least 2 hour dry time between coats, and a minimum of 4 hours before refloating. Where exposed to direct sunlight or high temperatures, launching is recommended no more than 24 hours after application.

STORAGE AND DISPOSAL

PESTICIDE DISPOSAL: Pesticide, spray mixture or rinsate that cannot be used according to label instructions, must be disposed of according to Federal or approved state procedures under Subtitle C of the Resource Conservation and Recovery Act.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other approved state and local procedures.

ML-107 9-82

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS (& DOMESTIC ANIMALS) (SR-1)

CONTAINS ORGANIC SOLVENT

WARNING!

FLAMMABLE

CAUSES EYE IRRITATION

HARMFUL IF ABSORBED THROUGH SKIN.

Avoid contact with skin, eyes, or clothing.

Wear protective clothing such as gloves, long-sleeved

cotton shirt, long pants, and hat.

May be fatal if swallowed or inhaled.

Do not breathe vapor.

When used in enclosed areas, spraying paint or sanding

best surface, wear a respirator jointly approved by the

Miner, Enforcement and Safety Administration and the

National Institute for Occupational Safety and Health.

Remove contaminated clothing and wash before reuse.

Wash thoroughly with soap and water after handling.

PRACTICAL TREATMENT:

If swallowed: Drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention.

If in eyes: Flush with plenty of water. Get medical attention.

If on skin: Wash with plenty of soap and water. Get medical attention.

If inhaled: Remove victim to fresh air. In not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.

SHIPPING NAME

HAZARD CLASS

HAZARD IDENTIFICATION NUMBER UN1253

PAINT

FLAMMABLE LIQUID

Refer to product material safety data bulletin, available upon request, for further safety and handling information.

(ECL-84 6-82)

KEEP OUT OF REACH OF CHILDREN

WARNING! See Precautions Elsewhere on Label

For Industrial Use Only. Do Not Use In or Around a Household or Dwelling.

(PA-11)

Not Sold For Use in Air Pollution Regulation Areas.

Photochemically Reactive Per Rule 102. (PA-21)

EPA Reg. No. 9855-7

EPA Est. 98

NET 5 GAL. (18.927 Liter)

BEST DOCUMENT AVAILABLE

Mobil® The Coating

Bottom Paint
Cal Super Service
-Fouling 59-D-1

OUT OF REACH OF CHILDREN

! See Precautions Elsewhere on Label (PA-22)


Industrial Use Only. Do Not Use In or
Near a Household or Dwelling. (PA-11)
Not For Use In Air Pollution Regulation Areas.
Chemically Reactive Per Rule 102. (PA-21)

9855-7

EPA Est. 9855-N.J.-1

5 GAL. (18.927 Liters)

ANTI-FOULING INGREDIENTS		
ACTIVE INGREDIENTS		
Cuprous Oxide		25.7%
INERT INGREDIENTS		
59-D-1	1-13-73	100.0%

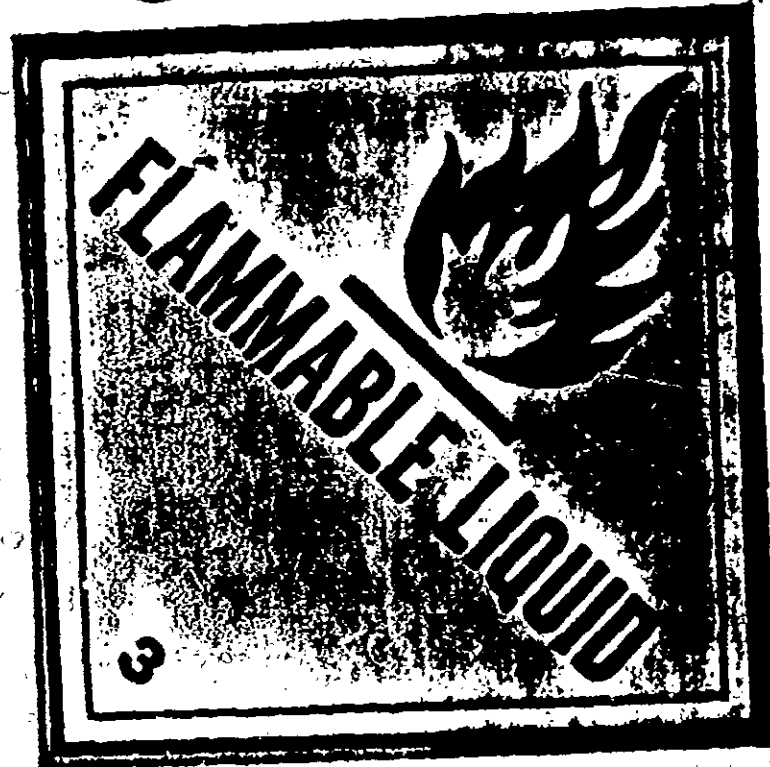

Mobil Chemical Company

MAINTENANCE & MARINE COATINGS DEPARTMENT
EDISON, N.J. 08817/BEAUMONT, TEX. 77704/KANKAKEE, ILL. 60901/LOS ANGELES AREA/AZUSA, CALIF. 91702