

ANTI-FOULING PAINTS FOR METAL BOTTOMS

SURFACE PREPARATION: Metal surfaces must be dry, clean and free from grease, oil, rust and loose paint. For maximum adhesion and performance the steel must be blasted and coated with recommended primer or anti-corrosive barrier coats specified for the complete finishing system.

MIXING: Anti-Fouling paints must be stirred at intervals since the pigments tend to settle. Power mix or box the paint until the product is uniform. Stir the paint at intervals during painting.

THINNING: Apply as received or thin slightly with 52-T-73 Thinner for brush or roller work. Use 52-T-70 Spraying Thinner for spray. Do not thin with oil.

APPLICATION: Apply preferably by brush or roller. A minimum of two coats must be applied. Apply at a spreading rate of 300 square feet per gallon. Recoat after 8 hours and vessel can be refloated one hour after second coat. Do not paint in cold or damp weather. Close container after use.

ML-265 2-70


**CAUTION! COMBUSTIBLE.
CONTAINS COPPER AND XYLOL.
HARMFUL IF SWALLOWED. VAPOR HARMFUL.**

Keep away from heat, sparks and open flame. Do not apply on any interior surfaces of a dwelling or a place used for the care of children or on window sills, toys, cribs or other furniture which may be used by children. Avoid breathing of vapors or spray mist or repeated contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

(CCD-137A)

**USE WITH ADEQUATE VENTILATION.
KEEP OUT OF THE REACH OF CHILDREN.**

Mobil®

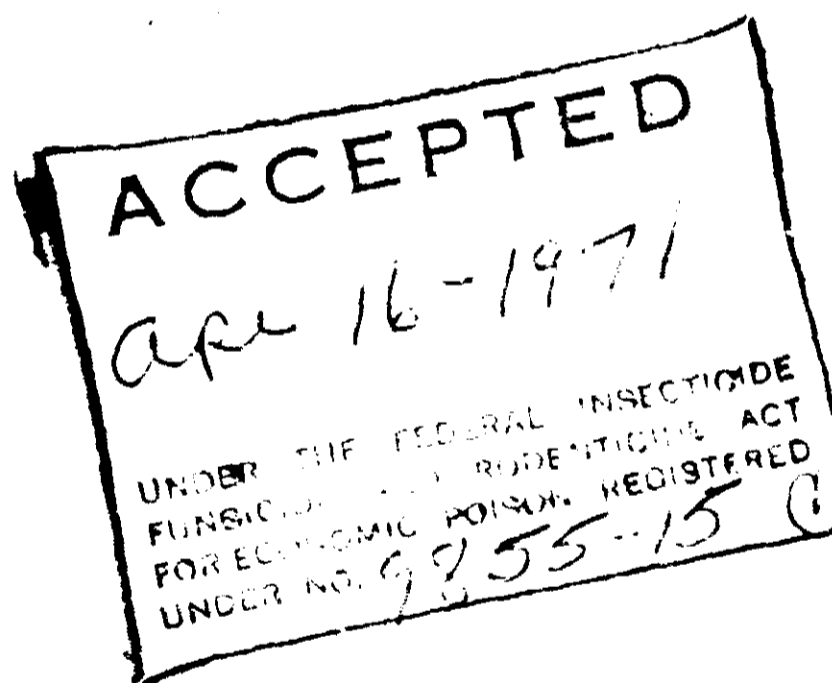

U. S. D. A.
REGISTRATION
#8507-4

Registration Label
For "Mordon" Brand
Bronze Antifouling Paint

CAUTION! KEEP OUT OF REACH OF CHILDREN.
HARMFUL OR FATAL IF SWALLOWED.
VAPOR HARMFUL.

See back panel for additional cautions (FS-1)