


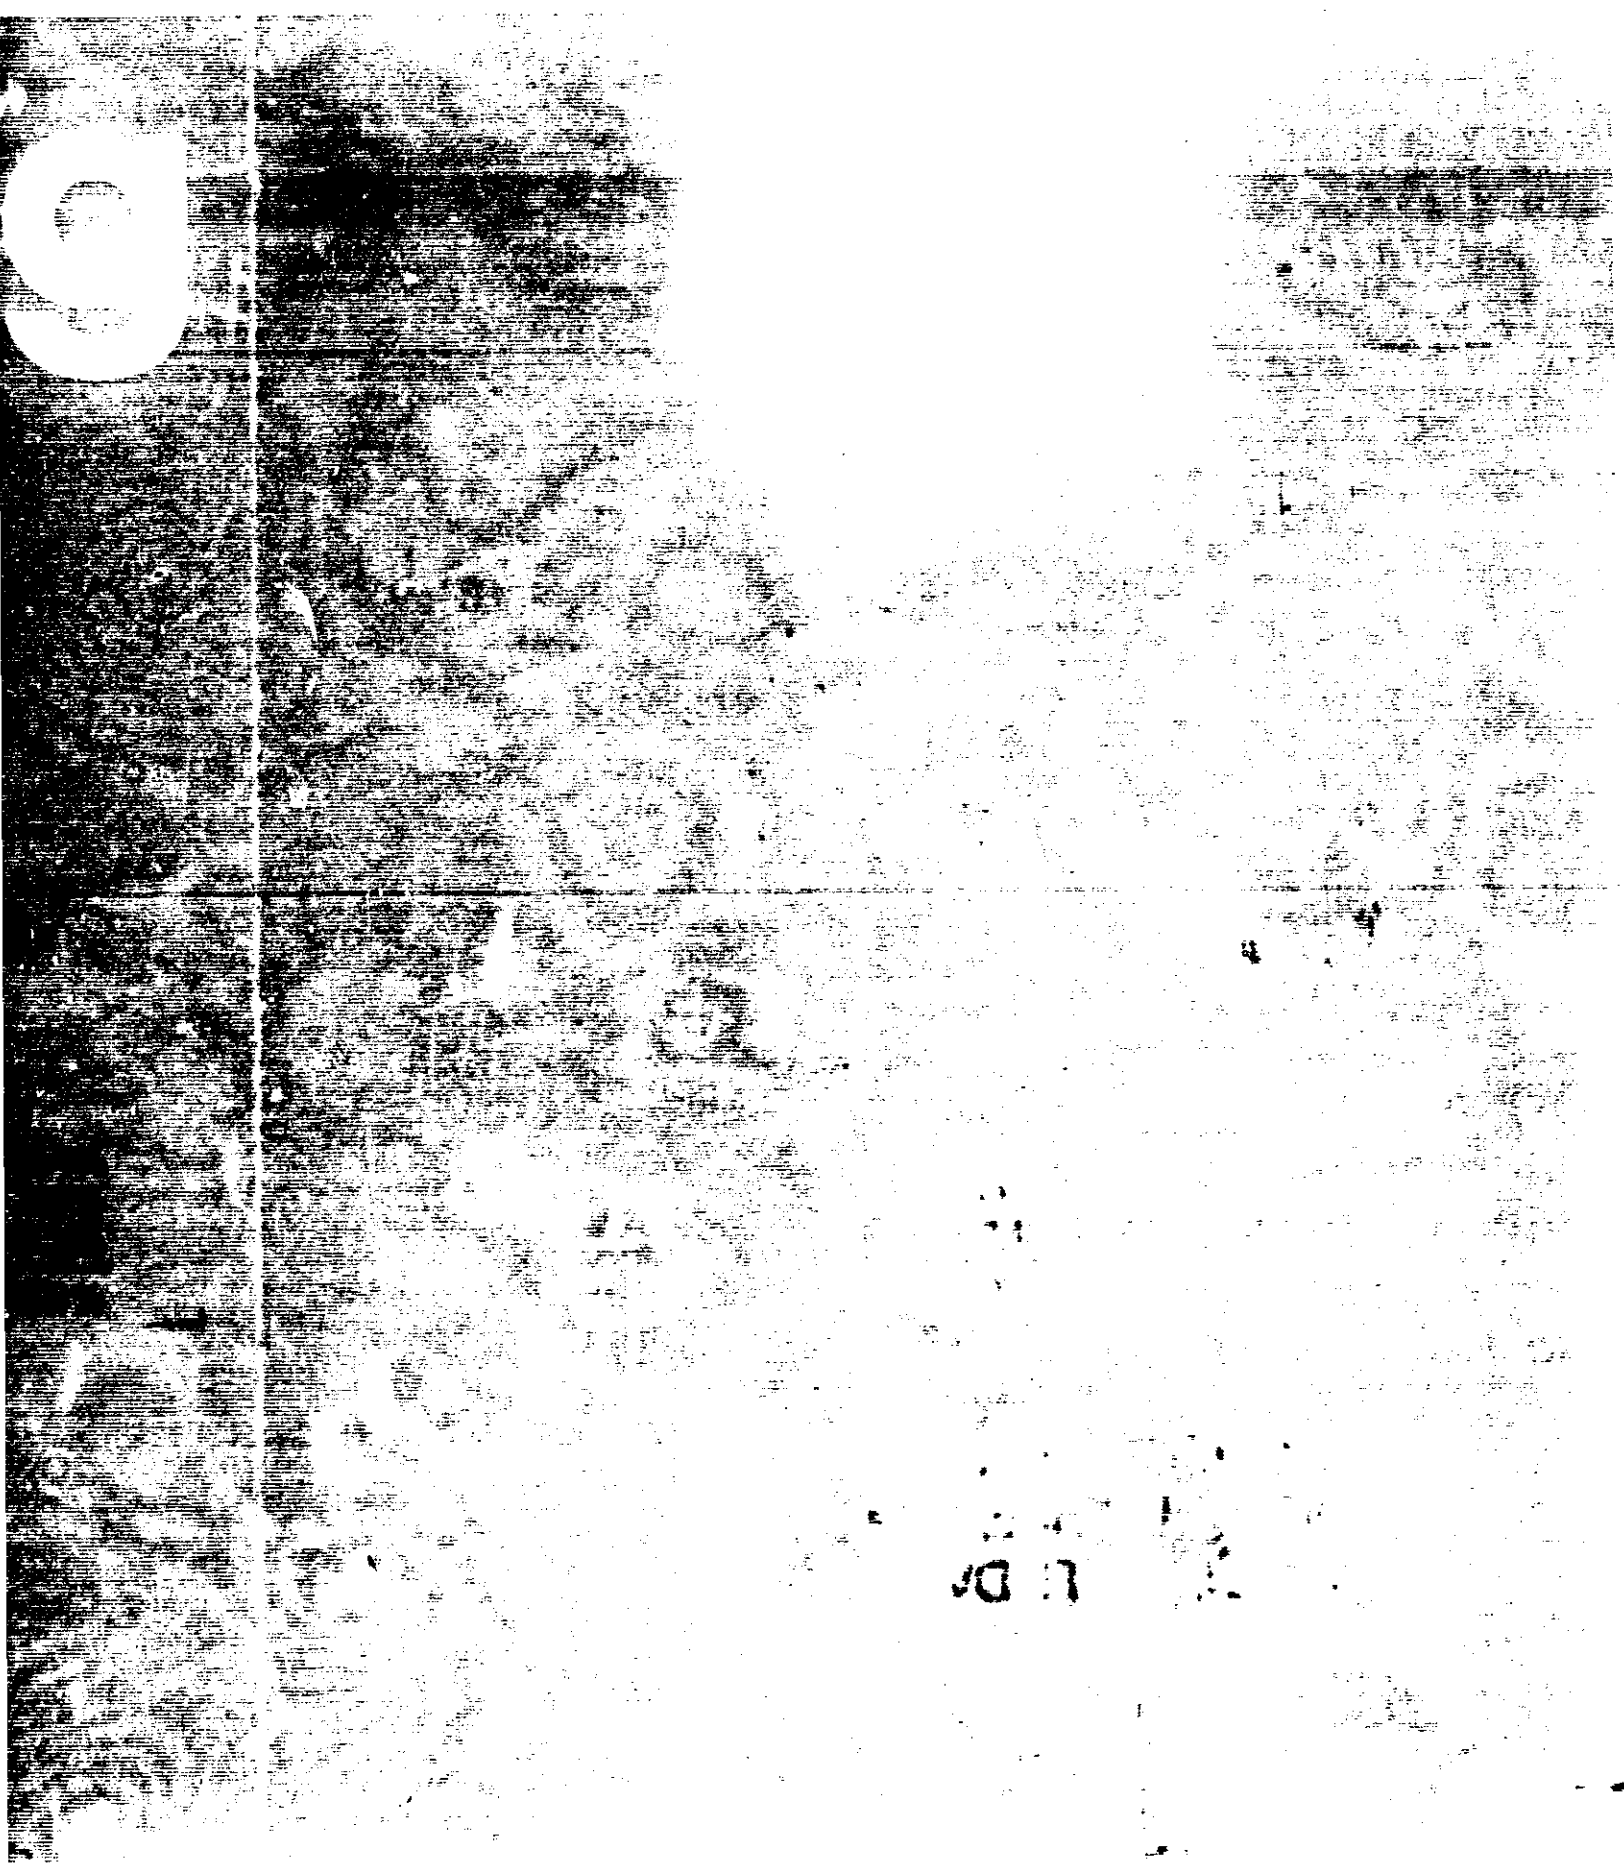

ANTI-FOULING PAINT FOR METAL BOTTOMS:

Application of two coats is recommended for best performance.

Surface Preparation: Surfaces must be dry, clean, and free of dirt, dust, grease, oil, rust, loose paint and other contaminants. Steel must be coated with suitable primer, or anti-corrosive barrier coats before application of anti-fouling.

Mixing: Before use, power mix or box the paint until the product is uniform. Stir the paint at intervals during application to maintain uniformity.

Application: Apply by brush, spray or roller. Do not paint in cold or damp weather.

Thinning: Thin slightly with Thinner 7-T-33 when required for application. Use Thinner 7-T-33 for cleanup.

Coverage: A 2 mil dry film will be obtained at a theoretical spreading rate of 550-600 square feet per gallon, depending on the specific product used. Actual coverage will be less due to application techniques, job conditions and condition of surface.

Dry Time: At 70°F. and 50% R.H., allow at least 2 hour dry time between coats, and a minimum of 4 hours before refloating.

Safety: When applied in confined areas, provide forced fresh air ventilation. Use fresh air masks and explosion-proof and non-sparking equipment.

Caution: Do not reuse containers. Destroy and properly dispose when empty. Do not contaminate water by cleaning of equipment, or disposal of wastes.

Mob. 6-74

CONTAINS -- ORGANIC SOLVENT

WARNING!

Flammable liquid and vapor.
Vapor irritates eyes.
Contains benzene.



Keep away from heat, sparks, and open flame.
Avoid breathing.
Avoid contact with eyes, skin, and clothing.
Wash thoroughly after handling.

For more information, contact your local health department.
When using, wear protective clothing and equipment.
Keep away from children.

Do not use if the container is damaged or leaking.
Do not use if the product is contaminated or if the
manufacturer's instructions are not followed.

In case of fire, use dry chemical or foam with
proper instructions. Do not use water. Call
fire department.

Mobil

Vinyl Anti-Fouling Paint Black 559-J-4

WARNING! See caution elsewhere
on label. (FR-6)

ANTI-FOULING INGREDIENTS		
ACTIVE INGREDIENTS		
Tri-n-butyltin Fluoride		17.2%
Bis (Tri-n-butyltin) Oxide		4.0%
INERT INGREDIENTS		78.8%
850-1-4	12.2.73	100.0%

NOTICE: THIS PRODUCT IS FOR INDUSTRIAL USE ONLY
(FR-1) AND IS NOT INTENDED OR SUITABLE FOR USE
IN OR AROUND A HOUSEHOLD OR DWELLING

EPA Reg. No. 9855-30

EPA Est. 9855-NJ-1