

Mobil

Sovaklor Long Life Anti-Fouling 59-R-26

WARNING! See caution elsewhere
on label. (FR-6)

ANTI-FOULING INGREDIENTS	
ACTIVE INGREDIENTS	
Cuprous Oxide	45.9%
Metallic Copper	1.0%
Tri-n-butyltin Fluoride	4.0%
INERT INGREDIENTS	
	49.1%
59-R-26 5-9-74	100.0%

NOTICE: THIS PRODUCT IS FOR INDUSTRIAL USE ONLY
(FR-1) AND IS NOT INTENDED OR SUITABLE FOR USE
IN OR AROUND A HOUSEHOLD OR DWELLING.

EPA Reg. No. 9855-31

EPA Est. 9855-NJ-1

3/3/75
UP
YUN
FOR
ED

9855-31

ANTI-FOULING PAINT FOR METAL BOTTOMS:
Application of two coats is recommended for best performance.

Surface Preparation: Surfaces must be dry, clean, and free of dirt, dust, grease, oil, rust, loose paint and other contaminants. Steel must be coated with suitable primer, or anti-corrosive barrier coats before application of anti-fouling.

Mixing: Before use, power mix or box the paint until the product is uniform. Stir the paint at intervals during application to maintain uniformity.

Application: Apply by brush, spray or roller. Do not paint in cold or damp weather.

Thinning: Thin slightly with Thinner 7-T-33 when required for application. Use Thinner 7-T-33 for clean-up.

Coverage: Apply at a rate that will provide a 2 mil dry film per coat. Actual coverage will vary depending upon application technique, job conditions and type of surface.

Dry Time: At 70°F. and 50% R.H., allow at least 4 hour dry time between coats, and a minimum of 8 hours before refloating.

Safety: When applied in confined areas, provide forced fresh air ventilation. Use fresh air masks and explosion-proof and non-sparking equipment.

Caution: Do not reuse container. Destroy and properly discard when empty. Do not contaminate water by cleaning of equipment, or disposal of wastes.

ML-330 10-74

CONTAINS ORGANO TIN COMPOUND
AND ORGANIC SOLVENT

WARNING!



FLAMMABLE (<100°F/TCC).

HARMFUL IF SWALLOWED OR ABSORBED
THROUGH SKIN

VAPOR HARMFUL

CAUSES IRRITATION

Keep away from heat, sparks, and open flame.

Avoid breathing vapor.

Avoid contact with eyes, skin, and clothing.

Wash thoroughly after handling.

Use with adequate ventilation.

Wear an air supplied mask to avoid breathing concentrated vapors in enclosed areas.

Keep container closed.


FIRST AID: If inhaled, remove to fresh air.

If not breathing give artificial respiration, preferably mouth-to-mouth. Call a physician.

In case of contact, immediately flush eyes and skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Call a physician.

Wash clothing before reuse. Discard contaminated shoes.

(ICL-01 2-74)

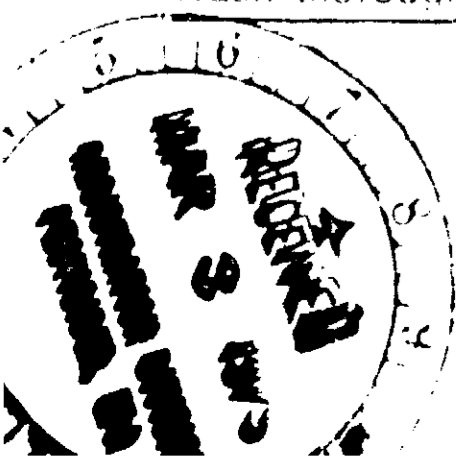

Mobil

Sovaklor Anti-Fouling 59-R-

WARNING! See caution elsewhere
on label. (FR-6)

ANTI-
ACTIV
Cupro
Metal
INERT
69-R-2

NOTICE: THIS PRODUCT IS FOR INDUSTRIAL
(FR-1) AND IS NOT INTENDED OR SUITABLE
IN OR AROUND A HOUSEHOLD OR D

EPA Reg. No. 9855-32

EPA

NET 1 GALLON

3/3/75

9855-32

UNDER
FUN
FOR
ED