

**TERMITE CONTROL**

**Specific Directions for Commercial Operators**

1. Control termites add 1 gallon BHC E-11 to 10 gallons of water in a sprayer. Apply the resulting emulsion at the following rates:

**(A) BUILDINGS WITH BASEMENTS**

1. Apply an overall treatment under the basement floorings as well as under the tiled porches, entrance platforms, etc. in entrances and similar situations where the soil is at the grade level. Apply at the rate of 1 gallon per 10 square feet, except that in under slabs of washed gravel, sanders, etc. use an extra material or raise the dosage to at least one half. Where crawl spaces exist, treat as described in part C below.

2. Dig a narrow trench to the top of the foundation wall inside of foundation walls around pipes, sewer pipes and conduits. Apply 4 gallons of emulsion per 5 linear feet of trench. The emulsion should be mixed with the soil as it is being replaced in the trench.

3. Along the outside of foundation walls, dig a trench such that trench is 6 inches deep at the top of the footings of the wall, less than 15 inches in depth to the top of the footings, apply 1 gallon per 5 linear feet. Replace the soil and apply another 1 gallon per 5 linear feet to the back fill. Cover the back fill with a thin layer of soil. If the trench is more than 15 inches in depth to the top of the footings, apply 2 gallons per 5 linear feet. Replace the soil and apply another 2 gallons per 5 linear feet to the back fill. Cover the back fill with a thin layer of soil. A trench 8 inches deep is a maximum depth required at most. In foundations where the top of the footings is greater than 10 inches deep, dig a trench from the top of the footings to a depth of 12 inches deep and treat the footing, spacing the holes about 1 foot apart.

4. Treat all voids in hollow masonry units of the foundation at the rate of 1 gallon per 5 linear feet of wall. Apply the emulsion to reach the footing.

**(B) BUILDINGS WITH CRAWL SPACES**

1. Apply 2 gallons per 5 linear feet to critical areas only under the house. Such as along the inside of foundation walls, around pipes, sewer pipes and conduits. Trench according to directions in Part 2 below.

2. Along the outside of foundation walls, dig a trench such that trench is 6 inches deep at the top of the footings of the wall, less than 15 inches in depth to the top of the footings, apply 1 gallon per 5 linear feet. Replace the soil and apply another 1 gallon per 5 linear feet to the back fill. Cover the back fill with a thin layer of soil. If the trench is more than 15 inches in depth to the top of the footings, apply 2 gallons per 5 linear feet. Replace the soil and apply another 2 gallons per 5 linear feet to the back fill. Cover the back fill with a thin layer of soil. A trench 8 inches deep is a maximum depth required at most. In foundations where the top of the footings is greater than 10 inches deep, dig a trench from the top of the footings to a depth of 12 inches deep and treat the footing, spacing the holes about 1 foot apart.

3. Apply 1 gallon per 10 square feet of emulsion to the underside of porches, tiled entrance platforms, etc. in entrances and similar situations where the soil is at the grade level. Where crawl spaces exist, treat as described in part C below.

4. Treat all voids in hollow masonry units of the foundation at the rate of 1 gallon per 5 linear feet of wall. It is best to apply the emulsion to reach the footing.

**(C) BUILDINGS WITH CONCRETE SLAB ON THE GROUND**

1. Apply 1 gallon per 10 square feet of emulsion to the underside of porches, tiled entrance platforms, etc. in entrances and similar situations where the soil is at the grade level. Where crawl spaces exist, treat as described in part C below.

2. Apply 2 gallons per 5 linear feet of emulsion to the inside of foundation walls around pipes, sewer pipes and conduits. Trench according to directions in Part 2 below.


3. Along the outside of foundation walls, dig a trench such that trench is 6 inches deep at the top of the footings of the wall, less than 15 inches in depth to the top of the footings, apply 1 gallon per 5 linear feet. Replace the soil and apply another 1 gallon per 5 linear feet to the back fill. Cover the back fill with a thin layer of soil. If the trench is more than 15 inches in depth to the top of the footings, apply 2 gallons per 5 linear feet. Replace the soil and apply another 2 gallons per 5 linear feet to the back fill. Cover the back fill with a thin layer of soil. A trench 8 inches deep is a maximum depth required at most. In foundations where the top of the footings is greater than 10 inches deep, dig a trench from the top of the footings to a depth of 12 inches deep and treat the footing, spacing the holes about 1 foot apart.

4. Treat all voids in hollow masonry units of the foundation at the rate of 1 gallon per 5 linear feet of wall. It is best to apply the emulsion to reach the footing.



**BHC E-11**

An Emulsifiable Concentrate Containing  
1.0 lb. of Gamma Isomer per Gallon

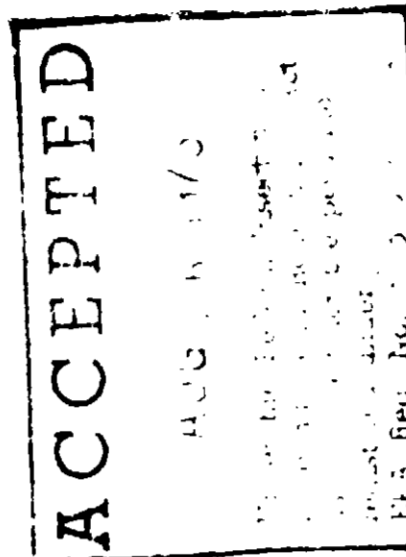

**ACTIVE INGREDIENTS:**

Gamma Isomer of Benzene Hexachloride	11.8%
Other Isomers of Benzene Hexachloride	13.4%
Xylene	68.2%

**INERT INGREDIENTS**

TOTAL	100.0%
-------	--------

**WARNING: KEEP OUT OF REACH OF CHILDREN.**

SEE SIDE PANEL FOR OTHER CAUTIONS

**WARNING**

This product is toxic to fish, birds, and other wildlife. Keep out of lakes, streams, or ponds. Do not apply where runoff is likely to occur. Do not apply when weather conditions favor drift from areas treated. Do not contaminate water by cleaning of equipment or disposal of wastes. Apply this product only as specified on this label.

DO NOT apply BHC E-11 to soil or areas upon which edible root crops are to be grown. DO NOT use on forage crops that are to be fed to dairy animals or animals being finished for slaughter. DO NOT pasture or feed treated straw to meat or dairy animals. DO NOT pasture other types of animals on treated forages until after first cutting.

**DO NOT USE, POUR, SPILL, OR STORE  
NEAR HEAT OR OPEN FLAME**

**AVOCADO** — Use 1 quart of BHC E-11 per 100 gallons of water for control of Webbing Worms and Mirids. Spray just before blossoming or just after fruit set. Tolerance of BHC on avocados is 1 ppm.

**WARNING**

May be fatal if swallowed. Avoid contact with eyes. In case of contact with eyes flush with water and get medical attention.

May be absorbed through skin. Do not breathe spray mist. Avoid skin contact. In case of contact wash immediately with soap and water. Avoid contamination of feed and foodstuffs. DO NOT use on household pets or humans.

DO NOT reuse empty container. Destroy it by burning with waste or burning. Stay away from smoke or fumes.

**NOTICE:** Seller makes no warranty, expressed or implied, concerning the use of this product other than indicated on the label. Buyer assumes all risk of use and or handling of this material when such use and or handling is contrary to label instructions.

**NET CONTENTS 5 GAL.**

MANUFACTURED BY

**LANDIA CHEMICAL CO.**

LAKELAND, FLORIDA 33801

EPA Reg. No. 9859-62

Est. No. 9859-FL-1