

CHILTON SUPER DRIPLESS NO. 8 COPPER BOTTOM PAINT

Chilton Super Dripleless No. 8 Bottom Paint is the result of over 100 years experience in making quality Marine Paint Products. This paint is the only anti-fouling bottom paint that carries a performance guarantee. After years of exposure in marine environments throughout the world the Chilton Paint Company is expressing its confidence in this paint's performance by offering a one year replacement guarantee against marine growth.

Contents of can must be thoroughly stirred prior to painting. Because of the unique thixotropic consistency of this paint, no stirring is required during application and a continuous and uniform protective barrier shields underwater surfaces from the adhesion of marine organisms in both fresh and salt waters.

This paint is intended for use on wood, metal and fiberglass boat bottoms. Chilton Super Dripleless No. 8 can be applied by brush or roller. Clean tools with mineral spirits.

FOR WOODEN HULLS: Surface must be free of grease, oil and old dry marine organisms. No special primers are required for painting bare wooden surfaces. All old, loose and flaking paints must be removed prior to painting. All bronze paints must be completely stripped before painting. This paint can be applied over other copper paints that are firmly adhered to the surface. Wire brushing removes all old loose paint particles and insures good adhesion. This paint can be applied over vinyl bottom paints provided that they contain no bronze pigments and do not have a high gloss. Apply two coats, directly from the can, without thinning. Allow at least six hours for first coat to dry before recoating. Hull should be launched within three days of second coat.

ON FIBERGLASS HULLS: New boat bottoms must be washed with white gasoline or a harsh solvent and then scuffed with medium grit production sandpaper. After the surface is prepared as above, apply two coats of Super Dripleless No. 8 directly from the can without thinning. Allow the first coat to dry at least 6 hours before applying second coat. Previously painted fiberglass hulls may be treated as previously painted wooden hulls, as per instructions above.

ON STEEL, ALUMINUM AND OTHER METAL HULLS: Metal hulls must be free of all old paint films and bared to bright metal. Apply two coats of Chilton Zinc Rich Epoxy Primer according to label directions and finish with two coats of Chilton Super Dripleless No. 8 directly as it comes from the can without thinning. Allow the first coat to dry at least 6 hours before applying the second coat. Electrolysis, as with all metal surfaces, must be guarded against with proper precautions. Chilton makes no warranty or guarantee against damages resulting from electrolysis.

Chilton Super Dripleless No. 8 will prevent the growth of marine organisms for one complete boating season, not to exceed one year. The one year guarantee period begins the date of purchase and if our product fails to perform at any time within the one year period, complaints may be registered by mail to the factory. This guarantee is valid only if the paint is applied according to label instructions and if the boat remains in the water continuously from the date of first launching, after painting, and is not hauled or exposed to the air for the duration of the boating season not to exceed one year.

If Chilton Super Dripleless No. 8 fails to perform as our guarantee states, the Chilton Paint Company will replace at no charge a similar quantity as that purchased. Labor, hauling and other charges of any kind shall not be reimbursable by the Chilton Paint Company.

DANGER!
MAY BE FATAL if swallowed.

Contains arsenic, copper and petroleum distillate. Do not apply on surfaces that may be used by children. Use with adequate ventilation. Avoid contact with eyes, skin and clothing. Avoid breathing of vapor or spray mist. Wash thoroughly after handling and before eating or smoking. Keep away from heat and open flame. Close container after use.


KEEP OUT OF REACH OF CHILDREN!

U.S.D.A. Reg. No. 9881--1

Contents: One Quart (U.S. Measure)

UNIT No.

ACTIVE INGREDIENTS:	
Cuprous Oxide	27.7%
*Arsenic Trioxide	2.3%
INERT INGREDIENTS:	70.0%
	100.0%
*Total Arsenic expressed as elemental Arsenic	2.22%
*Total water soluble Arsenic expressed as elemental Arsenic	1.7%

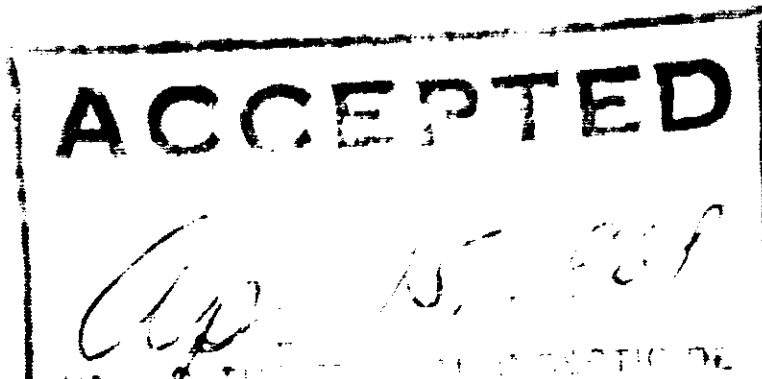

DRIPLESS NO. 8 COPPER BOTTOM PAINT

Result of over 100 years experience in making quality Marine Paint Products. This paint offers a performance guarantee. After years of exposure in marine environments it is expressing its confidence in this paint's performance by offering a one year

guarantee to painting. Because of the unique thixotropic consistency of this paint, no porous and uniform protective barrier shields underwater surfaces from the adhesion

of marine organisms on fiberglass boat bottoms. Chilton Super Dripleless No. 8 can be applied by brush or

roller. It is free of grease, oil and old dry marine organisms. No special primers are required for peeling and flaking paints must be removed prior to painting. All bronze paints must be applied over other copper paints that are firmly adhered to the surface. Wire brushes insure good adhesion. This paint can be applied over vinyl bottom paints provided they give a high gloss. Apply two coats, directly from the can, without thinning. Allow 6 hours. Hull should be launched within three days of second coat.

Surfaces must be washed with white gasoline or a harsh solvent and then scuffed with medium grade sandpaper as above, apply two coats of Super Dripleless No. 8 directly from the can. Wait at least 6 hours before applying second coat. Previously painted fiberglass hulls may require instructions above.

WARRANTY: Metal hulls must be free of all old paint films and bared to bright metal. Prepare primer according to label directions and finish with two coats of Chilton Super Dripleless without thinning. Allow the first coat to dry at least 6 hours before applying the second. Surfaces must be guarded against with proper precautions. Chilton makes no warranty for corrosion.

Guarantee of marine organisms for one complete boating season, not to exceed one year. If purchase and if our product fails to perform at any time within the one year period, this guarantee is valid only if the paint is applied according to label instructions from the date of first launching, after painting, and is not hauled or exposed to the elements for more than one year.

Our guarantee states, the Chilton Paint Company will replace at no charge a similar product or charges of any kind shall not be reimbursable by the Chilton Paint Company.

DANGER!
MAY BE FATAL if swallowed.

Do not apply on surfaces that may be used by children. Use with adequate ventilation. Avoid breathing of vapor or spray mist. Wash thoroughly after handling and avoid open flame. Close container after use.

WARNING! U.S.D.A. Reg. No. 9881-1

Contents: One Quart (U.S. Measure)

UNIT No.

ACTIVE INGREDIENTS:	
Cuprous Oxide	27.7%
*Arsenic Trioxide	2.3%
INERT INGREDIENTS:	
	70.0%
100.0%	
*Total Arsenic expressed as elemental Arsenic	
	2.27%
*Total water soluble Arsenic expressed as elemental Arsenic	
	1.7%

ACCEPTED