


SUPER HEAVY DUTY

One Gallon U.S. Standard Measure

3.79 Liters Metric Measure

.83 Imperial Gallon

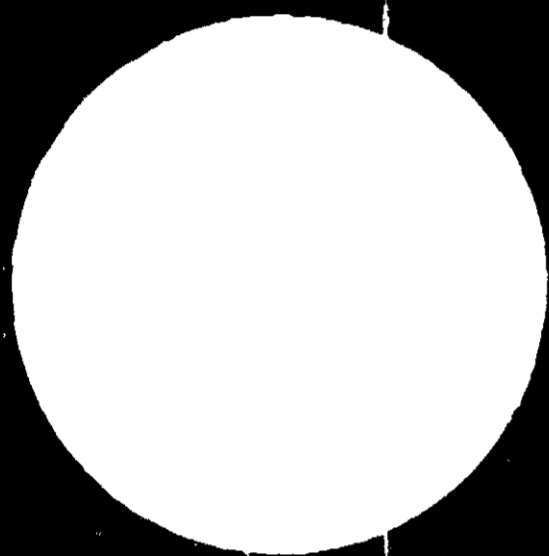

FOR
THAT
IMPORTANT
AREA



BELOW
THE WATER LINE

DIRECTIONS

1. Clean and dry the surface to be coated. Remove all dirt, grease, oil, and loose paint. If necessary, use a sandpaper or wire brush to remove old paint and rust. Wash with a detergent solution and rinse thoroughly with clean water. Allow the surface to dry completely.

2. Stir the product thoroughly before use. Do not shake. The product is a thick, creamy paste. It should be applied with a brush or roller. Apply a thick coat to the surface. The product will fill in any cracks and crevices. Allow the product to dry for 24 hours before applying a second coat.

3. Apply a second coat after 24 hours. The product will form a smooth, firm film. The film is resistant to fouling and will last for many months. The product is suitable for use on all types of hulls, including fiberglass, metal, and wood. It is also suitable for use on the interior of hulls.

4. The product is available in one gallon and three liter containers. It is also available in a smaller size for use on small boats. The product is sold by all major paint stores and hardware stores. For more information, contact your local distributor.

CHECK THE FACTS

Anti-fouling properties are based upon the quantity of ingredients and the very slow disintegration of the composition.


The coat is smooth and firm with excellent adhesion. The slow extrusion of the coat eliminates building up of "lead" layers, avoiding the cost of sanding and repainting a smooth bottom.

KL 990 can be brushed, rolled or sprayed, covering one-third more surface with no runs or sags.

Prolonged exposure to sun does not harm the anti-fouling properties. The boat can be launched even a week after application of the final coat.

Can be applied over previously painted surfaces AND DIRECTLY TO FIBER GLASS and EPOXY after an initial sanding to remove release coating and wax.



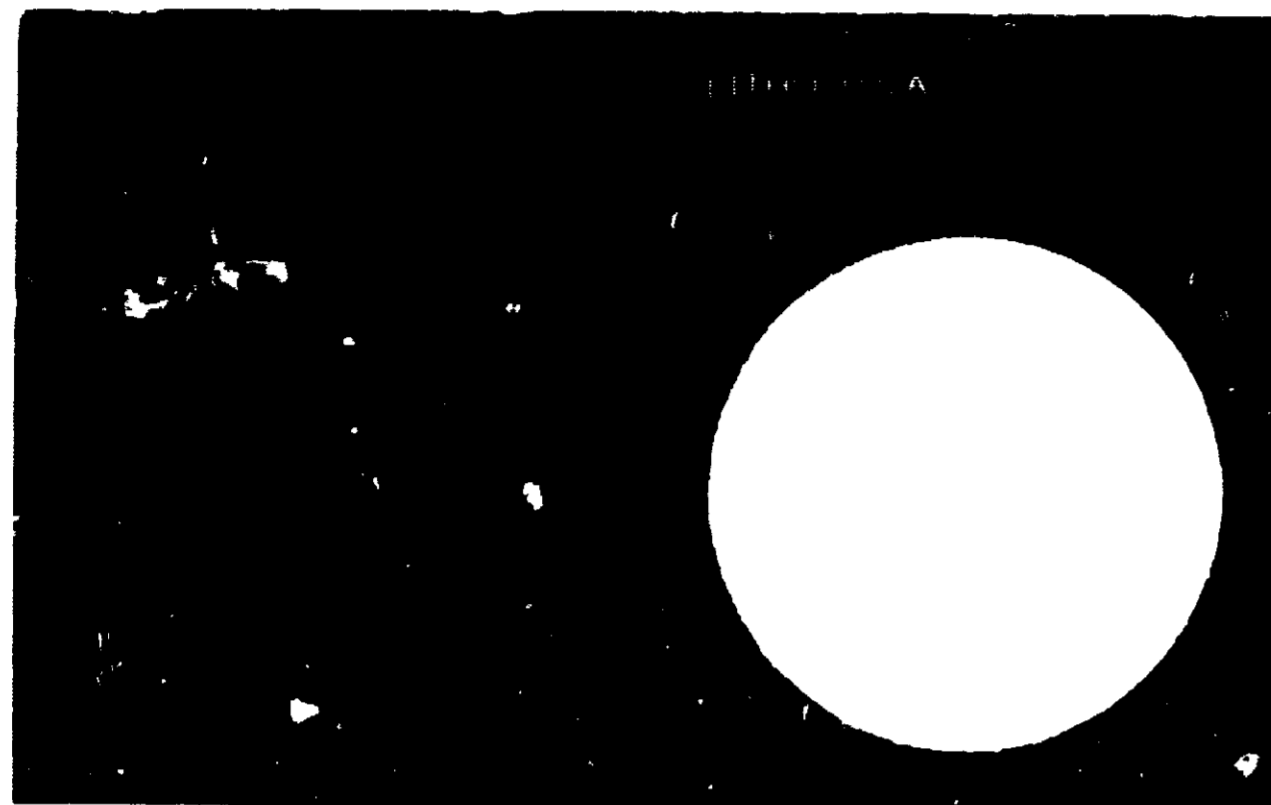

ACCEPTED FOR HAT
June 16 1971
UNDER 9956

FOR HAT
IMPORTANT
AREA



BELOW
THE WATER LINE

SUPER HEAVY DUTY

ANTI-FOULING

The dry coat of KL-990 contains powerful marine growth inhibitors. Tried and proven in Florida's coastal waters.



KL-990

ONE U. S. GALLON

KOMPOSITION

Prevents the growth of marine life on the bottom of sea-going vessels. Formulated for tropical and other heavily infested waters.

WARNING: Keep Out of Reach of Children. See side panel for additional precautions.