

B
A

SEAGUARD

PREMIUM GRADE SOFT COPPER NO. 2

INGREDIENT STATEMENT

| | |
|--------------------|-------|
| ACTIVE INGREDIENT | |
| •CUPROUS OXIDE | 26.9% |
| INERT INGREDIENTS | 73.1% |
| TOTAL | 100% |
| •COPPER EQUIVALENT | 1.1% |


DISPOSAL

... or feed by storage or

... te that cannot be used or disposed of according to ... l. state or local disposal

... dispose of in an approved

... disposal authorities for

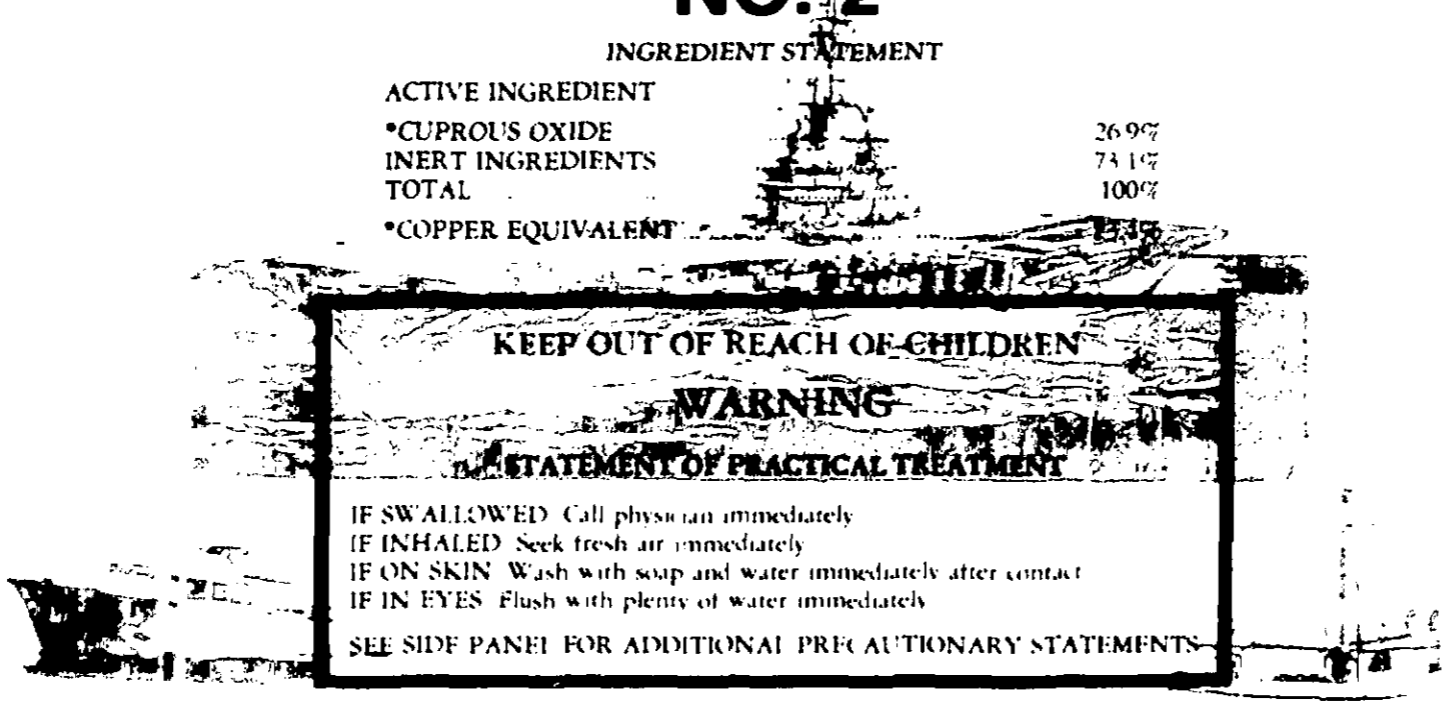

KEEP OUT OF REACH OF CHILDREN

WARNING

STATEMENT OF PRACTICAL TREATMENT

IF SWALLOWED Call physician immediately
 IF INHALED Seek fresh air immediately
 IF ON SKIN Wash with soap and water immediately after contact
 IF IN EYES Flush with plenty of water immediately

SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

ACCEPTED

JUL 6 1979

U.S. DEPARTMENT OF AGRICULTURE
 FEDERAL REGISTER

MFG BY SEAGUARD CORPORATION
 PORTSMOUTH, VIRGINIA 23705
 ESTABLISHMENT NO 10177-VA-1
 EPA REGISTRATION NO 10177-10

ONE GALLON NET CONTENTS

A
B

B
A

PRECAUTIONARY STATEMENTS

**HAZARD TO HUMANS & DOMESTIC ANIMALS
WARNING**

May cause eye and skin irritation. Do not get in eyes, on skin, or on clothing. Avoid breathing of vapor or spray mist. Wear goggles or face shield and rubber gloves when handling. Use protective breathing mask and protective clothing when sanding or spraying. Use with adequate ventilation. Harmful if swallowed.

In case of contact, immediately wash skin with soap and water, flush eyes with plenty of water and get medical attention if irritation persists. If swallowed, contact doctor immediately.

ENVIRONMENTAL HAZARDS

Do not contaminate water by cleaning of equipment or disposal of wastes.

PHYSICAL OR CHEMICAL HAZARDS

Do not use or store near heat or open flame.

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

**SEAGUARD #2 PREMIUM GRADE ANTI-FOULING
DIRECTIONS FOR USE**

SOFT COPPER FREE ERODING FORMULATION

RECOMMENDED: SEAGUARD PREMIUM GRADE ANTI-FOULING, SOFT COPPER is to be used on wood surfaces. SEAGUARD PREMIUM GRADE ANTI-FOULING is a soft copper formulation that allows the coating to dissolve freely, thus preventing any residual film build-up. The anti-fouling properties are uniquely tailored for the East Coast of the United States.

SURFACE PREPARATION: For wood surfaces-- clean surface thoroughly with water and scrub with stiff bristle brush. Any fouling residue should be removed with a wire brush before applying SEAGUARD PREMIUM GRADE ANTI-FOULING.

APPLICATION: SEAGUARD PREMIUM GRADE ANTI-FOULING is formulated to be applied by spray, brush, or roller. If applied by spray, an agitator equipped spray pot should be used, with the agitator running just fast enough to keep the anti-fouling pigments in uniform suspension. Thinning is not usually necessary, but SEAGUARD No. 600 Thinner may be used. For optimum anti-fouling performance, 2 coats of PREMIUM GRADE ANTI-FOULING should be applied, at 2.0 mil Dry Film Thickness each. Vessel launching should be made within 7 days of anti-fouling application.

Allow to dry 4 - 6 hours between coats.

Manufactured by

**SEAGUARD CORPORATION
PORTSMOUTH, VIRGINIA 23705**

STORAGE AND DISPOSAL

1. PROHIBITIONS

Do not contaminate water, food, or feed by storage or disposal.

2. PESTICIDE DISPOSAL

Pesticide, spray mixture, or rinsate that cannot be used or chemically reprocessed should be disposed of according to procedures approved by federal, state or local disposal authorities.

3. CONTAINER DISPOSAL:

Triple rinse (or equivalent) and dispose of in an approved landfill or bury in a safe place.

4. GENERAL:

Consult federal, state or local disposal authorities for approved alternative procedures.

SEAC

**PREMIUM GRADE
NO.**

INGREDIENTS

ACTIVE INGREDIENT

•CUPROUS OXIDE
INERT INGREDIENTS
TOTAL

•COPPER EQUIVALENT

KEEP OUT OF REACH

WARN

STATEMENT OF PRACTICE

IF SWALLOWED: Call physician immediately.
IF INHALED: Seek fresh air immediately.
IF ON SKIN: Wash with soap and water.
IF IN EYES: Flush with plenty of water.

SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONS

REG. BY SEAGUARD CORPORATION
PORTSMOUTH, VIRGINIA 23705
ESTABLISHMENT NO. 10177 VA 1
EPA REGISTRATION NO. 10177-10

ONE GALLON NET CONTENT

A
B

SEAGUARD

PREMIUM GRADE SOFT COPPER NO. 1

INGREDIENT STATEMENT

| | | |
|--------------------|-------|------|
| ACTIVE INGREDIENT: | | |
| *CUPROUS OXIDE | | 23% |
| INERT INGREDIENTS | | 77% |
| TOTAL | | 100% |
| *COPPER EQUIVALENT | | 20% |

KEEP OUT OF REACH OF CHILDREN


WARNING

STATEMENT OF PRACTICAL TREATMENT

IF SWALLOWED Call physician immediately
IF INHALED Seek fresh air immediately
IF ON SKIN Wash with soap and water immediately after contact
IF IN EYES Flush with plenty of water immediately
SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

MFG. BY SEAGUARD CORPORATION
PORTSMOUTH, VIRGINIA 23705
ESTABLISHMENT NO. 10177-VA 1
EPA REGISTRATION NO. 10177-9

ONE GALLON NET CONTENTS

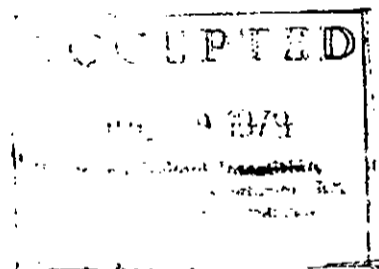

PRECAUTIONARY STATEMENTS

HAZARD TO HUMANS & DOMESTIC ANIMALS WARNING

May cause eye and skin irritation. Do not get in eyes, or skin, or on clothing. Avoid breathing of vapor or spray mist. Wear goggles or face shield and rubber gloves when handling. Use protective breathing mask and protective clothing when sanding or spraying. Use with adequate ventilation. Harmful if swallowed.

In case of contact, immediately wash skin with soap and water; flush eyes with plenty of water and get medical attention if irritation persists. If swallowed, contact doctor immediately.

ENVIRONMENTAL HAZARDS

Do not contaminate water by cleaning of equipment or disposal of wastes.

PHYSICAL OR CHEMICAL HAZARDS

Do not use or store near heat or open flame.

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

SEAGUARD #2 PREMIUM GRADE ANTI-FOULING DIRECTIONS FOR USE

"SOFT" COPPER FREE ERODING FORMULATION

RECOMMENDED: SEAGUARD PREMIUM GRADE ANTI-FOULING, SOFT COPPER is to be used on wood surfaces. SEAGUARD PREMIUM GRADE ANTI-FOULING is a soft copper formulation that allows the coating to dissolve freely, thus preventing any residual film build-up. The anti-fouling properties are uniquely tailored for the East Coast of the United States.

SURFACE PREPARATION: For wood surfaces—clean surface thoroughly with water and scrub with stiff bristle brush. Any fouling residue should be removed with a wire brush before applying SEAGUARD PREMIUM GRADE ANTI-FOULING.

APPLICATION: SEAGUARD PREMIUM GRADE ANTI-FOULING is formulated to be applied by spray, brush, or roller. If applied by spray, an agitator equipped spray pot should be used, with the agitator running just fast enough to keep the anti-fouling pigments in uniform suspension. Thinning is not usually necessary, but SEAGUARD No. 800 Thinner may be used. For optimum anti-fouling performance, 2 coats of PREMIUM GRADE ANTI-FOULING should be applied, at 2.0 mil Dry Film Thickness each. Vessel launching should be made within 7 days of anti-fouling application.

Allow to dry 4 - 6 hours between coats.

Manufactured by

SEAGUARD CORPORATION
PORTSMOUTH, VIRGINIA 23705

STORAGE AND DISPOSAL

- 1. PROHIBITIONS:**
Do not contaminate water, food, or feed by storage or disposal.
- 2. PESTICIDE DISPOSAL**
Pesticide, spray mixture, or rinsate that cannot be used or chemically reprocessed should be disposed of according to procedures approved by federal, state or local disposal authorities.
- 3. CONTAINER DISPOSAL:**
Triple rinse (or Equivalent) and dispose of in an approved landfill or bury in a safe place.
- 4. GENERAL:**
Consult federal, state or local disposal authorities for approved alternative procedures.