SDA Reg. No.

MAY CAUSE SEVERE EYE BURNS. MAY BE FATAL IF SWALLOWED. MAY CAUSE SKIN IRRITATION.

Do not get in eyes, on skin, w on clothing.

enti - L'An dimenti e un noiet e se<mark>tte traitet</mark>e su te Wear safety glasses.

Avoid exposure to vapor or spray mist.

Avoid storage near food and feed products.

Keep away from heat and open flame.


Use with adequate ventilation.

In case of contact immediately flush eyes with plenty of water for at least fifteen minutes and get prompt medical attention; wash skin with plenty of soap and water. Wash contaminated clothing before re-use.

	 Genteration and Dr. St. L. dis. Miss. 24
	let ter ter Plat State terret t
t de la composition de la comp	i te ma gentaria
	je 18. marete te Ave Grandstation de Brandstation

CONTAINS 7.7° TIN.

POLYESTER MARINE SHIELD

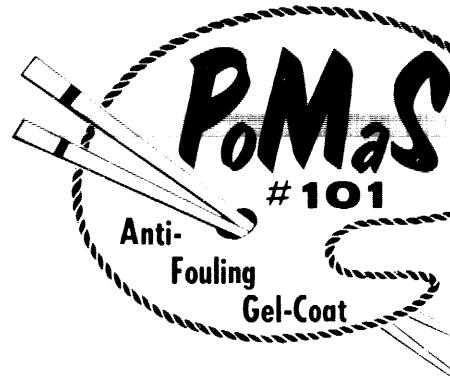

Boat manufacturers using molded polymers make PoMaS #101 an integral part of the hull by applying it during their molding operation.

PoMaS = 101 contains Biomet for salt and fresh water, retards marine organisms such as: algae, barnacles, tunicates, hydroids, and tube worms.

ACTIVE INGREDIENT:

TRI-N-BUTYLTIN FLUORIDE **INERT INGREDIENTS**

TOTAL

WARNING: **KEEP OUT OF REACH OF CHILDREN** SEE LEFT PANEL FOR OTHER WARNINGS



PLASTIC MOLDERS SUPPLY CO., INC.

and the second second

71 Sauth Avenue - Fonwood New Jer av 070,53

contal waters dramatically prove Pulles's long term effectivenes as an

POMASIZING PAYS

POLYESTER MARINE SHIELD

Color

20°° 80°° 100°°

PMS

GC

Lot No.

Weight per Gallon

Net Weight

DIRECTIONS FOR USE

This material has been scientifically formulated and supersonic blended to yield the eltimate properties for get coat applications. It can be breshed or spread at its manufactured viscosity but may be est with styrene monomen of desced. Under temperature of 20080 the get time is 15 10 minutes and 1 catalyst. This material has been pre-accelerated a edditional promoter chould normally not be me Hormal storage its as 3 months. She before

