


Chemtrol

No. 5B

MICROORGANISM  
CONTROL CHEMICAL

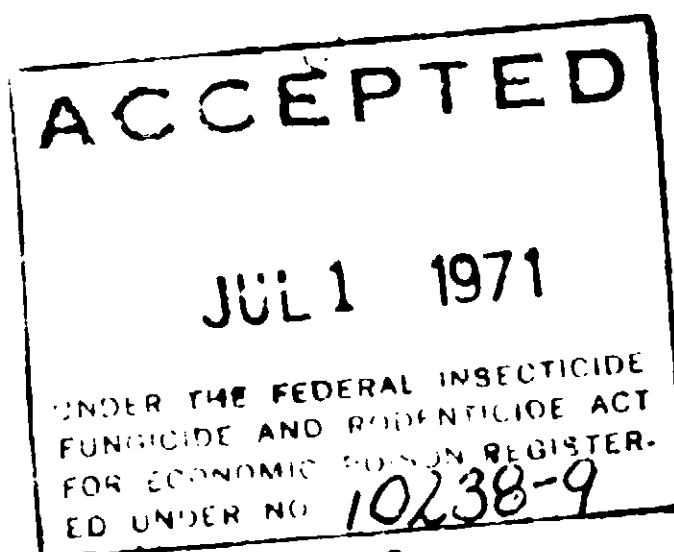

## DIRECTIONS:

For control of slime-forming bacteria and sulfite producing bacteria in petrochemical plants, gasoline plants, and refinery recirculating cooling tower water systems, use 24 to 84 ppm, or 0.2 to 0.7 lbs. of Chemtrol #5B per 1000 gals. contained water. Feed Chemtrol #5B directly from drum into system. Chemtrol #5B is not intended nor recommended for continuous use. Individual evaluations of systems obtainable from your Chemtrol representative.

NOTE: Chemtrol #5B intended for industrial use only. Do not apply to potable water or domestic water systems.

CAUTION: This product is toxic to fish. Do not discharge treated effluent into lakes, streams, or ponds.

## DANGER!

DO NOT GET IN EYES, ON SKIN OR ON CLOTHING. MAY BE HARMFUL IF SWALLOWED. In case of contact, immediately remove all contaminated clothing, and wash skin with plenty of water. For eyes, wash with plenty of water for at least 15 minutes. Also, for eyes, and if swallowed, get medical attention.

### ACTIVE INGREDIENTS:

1-(alkyl\* amino)-3-aminopropane  
benzoate ..... 50.0%

INERT INGREDIENTS: ..... 50.0%

Total ..... 100.0%

\*alkyl as in fatty acids of coconut oil.

USDA Registration No. 10238-9

Sellers guarantee shall be limited to the terms of the label, and subject thereto the buyer assumes any risk to persons or property arising out of use or handling and accepts the product on these conditions.

Chemtrol Company

P. O. BOX 15388

TULSA, OKLAHOMA 74115

Net Contents Shown Elsewhere On Container

ACCEPTED WITH COMMENTS