


Chemtrol

No. 1-5

MICROORGANISM
CONTROL CHEMICAL

DIRECTIONS:

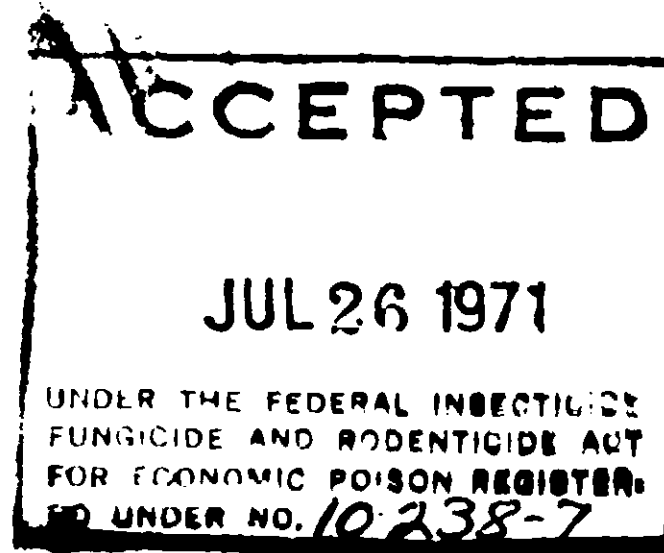

For control of algae, bacteria, fungi and yeast microorganisms in Industrial Recirculating Water Cooling Towers. The initial dosage range should be 1.0 to 2.0 gallons of Chemtrol #1-5 per 10,000 gallons of water in the system and the subsequent dosage range should be 0.3 to 1.3 gallons of Chemtrol #1-5 per 10,000 gallons of water in the system. Apply Chemtrol #1-5 directly from drum into water in sump. Individual evaluations of systems obtainable from your Chemtrol representative.

NOTE: Chemtrol #1-5 intended for industrial use only. Do not apply to potable water or domestic water systems.

CAUTION: This product is toxic to fish. Keep out of lakes, streams or ponds. Do not contaminate water by cleaning of equipment, or disposal of wastes.

ACTIVE INGREDIENTS:

Methylene bis(thiocyanate) 5.0%

INERT INGREDIENTS:

Dimethylformamide 95.0%

Total 100.0%

USDA Registration No. 10238-7

DANGER!

POISON



Buyer assumes all risk of use, storage or handling of this material not in strict accordance with directions given herewith.

Chemtrol Company

P. O. BOX 15388 TULSA, OKLAHOMA 74115

DO NOT GET IN EYES, ON SKIN OR ON CLOTHING. MAY BE FATAL IF SWALLOWED. AVOID BREATHING VAPOR.

Causes severe eye and skin damage. Wear goggles or face shield and rubber gloves when handling. Avoid contamination of food.

FIRST AID: In case of contact. Immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, call a physician. Remove and wash contaminated clothing before reuse.

DRUM DISPOSAL: Do not reuse empty drum. Return to drum reconditioner or destroy by perforating or crushing and burying in a safe place.

Net Contents Shown Elsewhere On Container

ACCEPTED WITH COMMENTS